


Montar un nuevo disco de 8GB

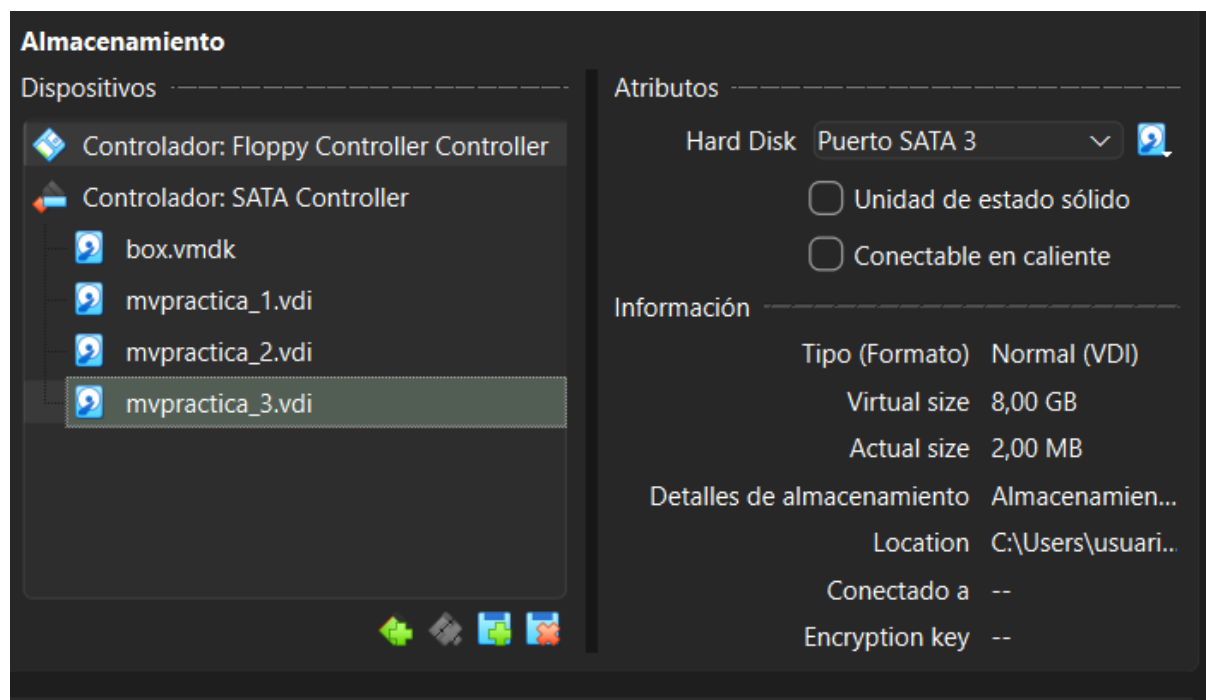

Crear una partición de 4GB tipo MBR

```
Command (m for help): n
Partition type
  p   primary (0 primary, 0 extended, 4 free)
  e   extended (container for logical partitions)
Select (default p):

Using default response p.
Partition number (1-4, default 1):
First sector (2048-16777215, default 2048):
Last sector, +/-sectors or +/-size{K,M,G,T,P} (2048-16777215, default 16777215): +4GB

Created a new partition 1 of type 'Linux' and of size 3.7 GiB.

Command (m for help): w
The partition table has been altered.
Calling ioctl() to re-read partition table.
Syncing disks.
```

Configurar como tipo swap

```
root@mvpractica:/mnt# mkswap /dev/sdd1
Setting up swapspace version 1, size = 3.7 GiB (4000313344 bytes)
no label, UUID=26ede626-1e32-4acd-9b16-cbe8c9b70fa5
root@mvpractica:/mnt# swapon /dev/sdd1
root@mvpractica:/mnt# swapon --show
NAME      TYPE      SIZE USED PRIO
/dev/sdd1 partition 3.7G   0B   -2
root@mvpractica:/mnt# sudo blkid /dev/sdd1
/dev/sdd1: UUID="26ede626-1e32-4acd-9b16-cbe8c9b70fa5" TYPE="swap" PARTUUID="5bd369d5-01"
root@mvpractica:/mnt# nano /etc/fstab
root@mvpractica:/mnt# swapoff /dev/sdd1
root@mvpractica:/mnt# swapon -a}
swapon: invalid option -- '}'
Try 'swapon --help' for more information.
root@mvpractica:/mnt# swapon -a
swapon: cannot find the device for UUID=12345678-abcd-1234-abcd-123456789abc
root@mvpractica:/mnt# swapon --show
root@mvpractica:/mnt# nano /etc/fstab
root@mvpractica:/mnt# swapon -a
root@mvpractica:/mnt# swapon --show
NAME      TYPE      SIZE USED PRIO
/dev/sdd1 partition 3.7G   0B   -2
root@mvpractica:/mnt# |
```

