



the forking workflow - setup

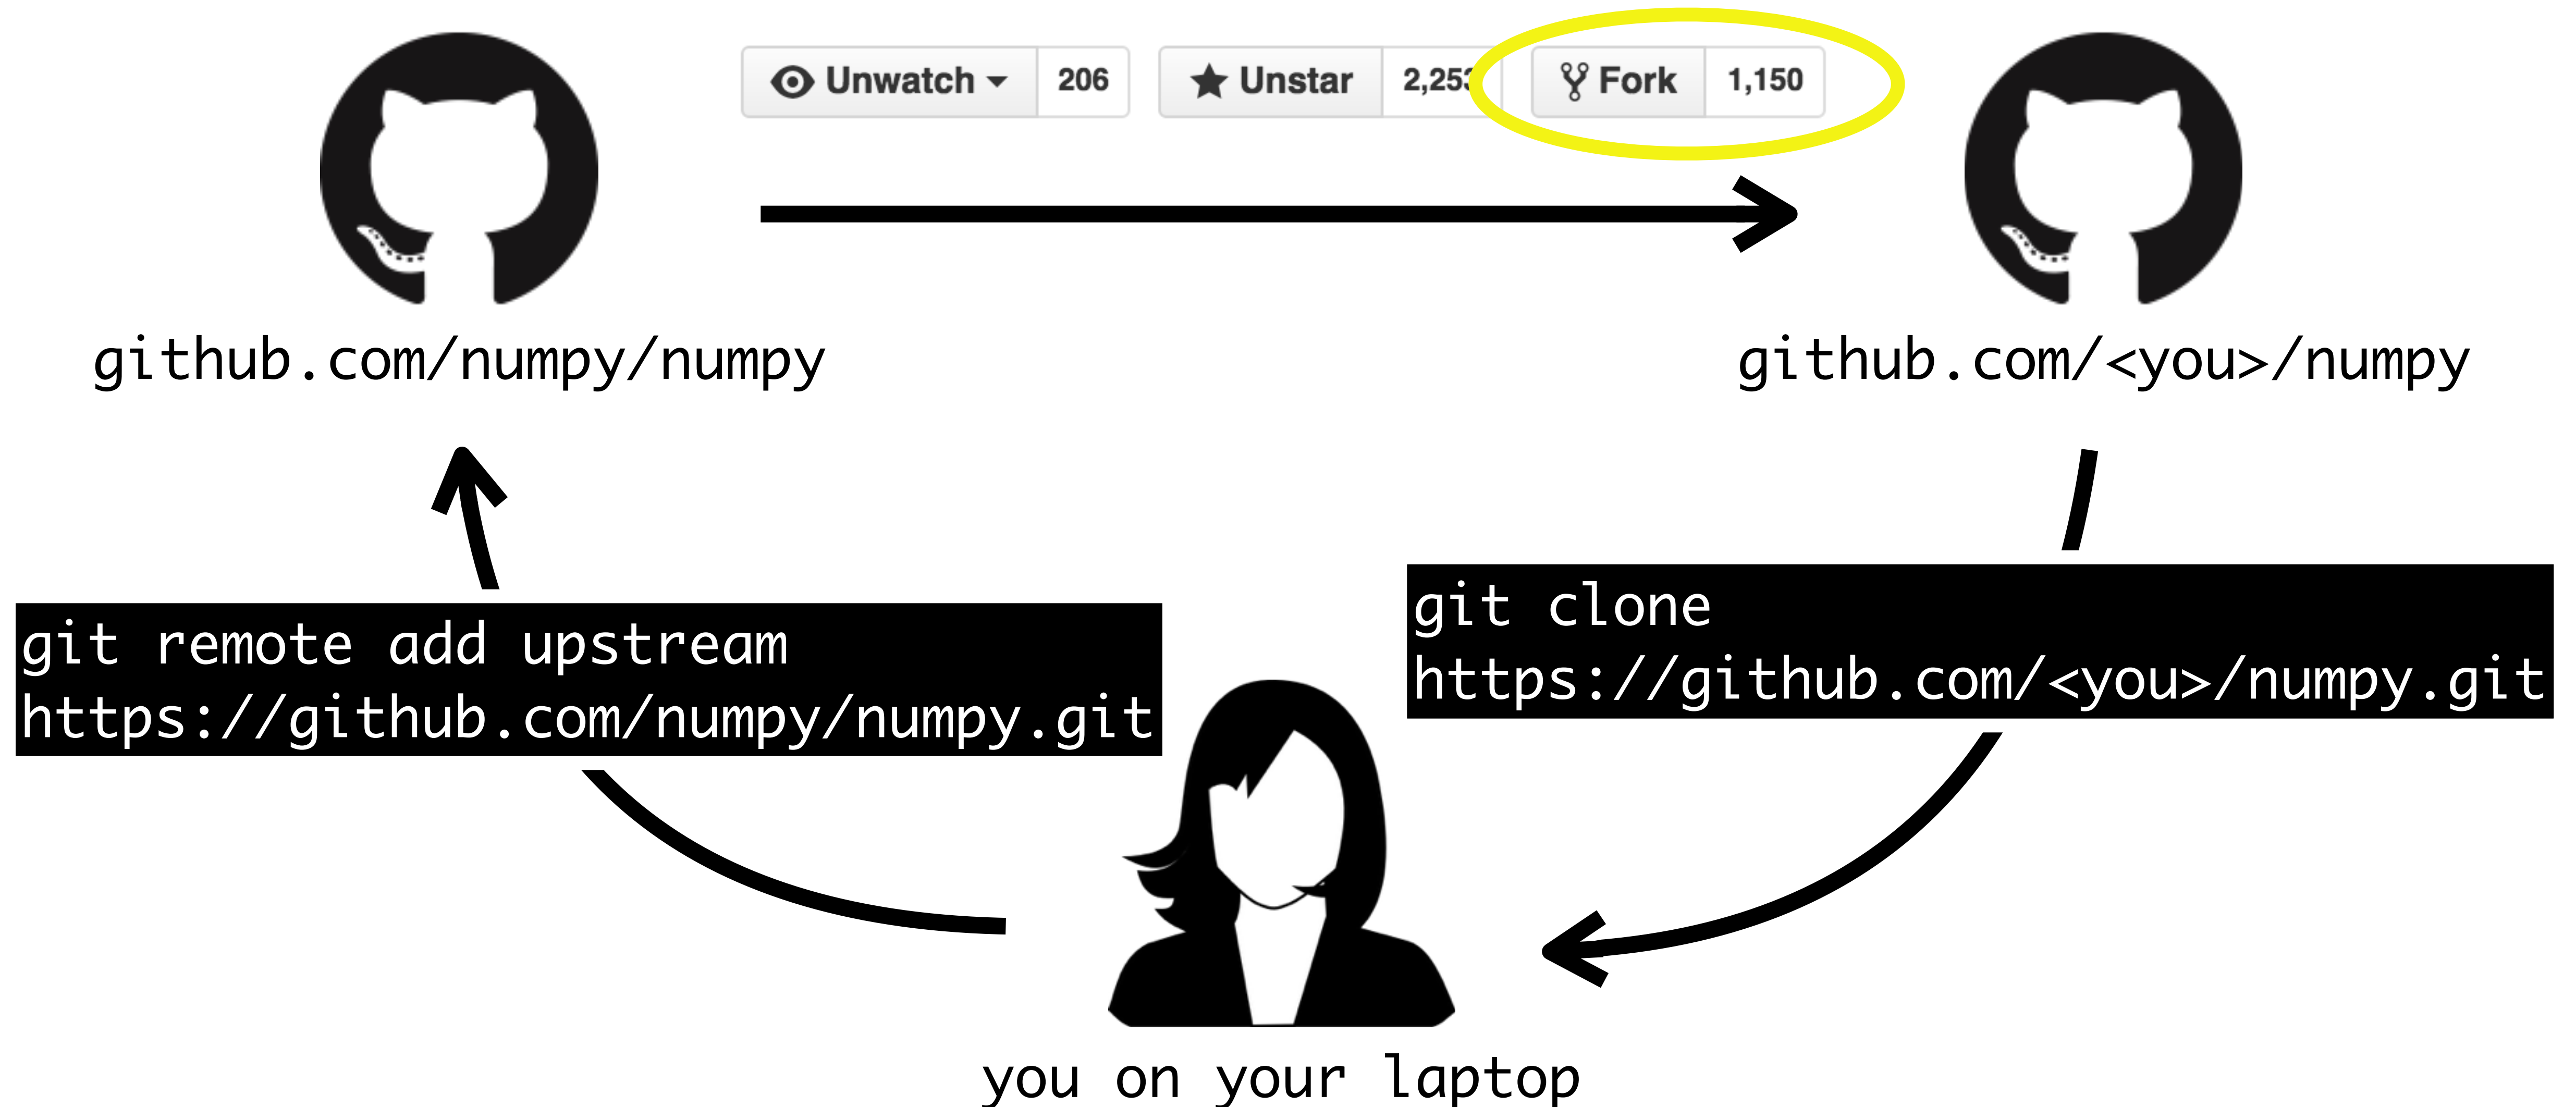

the forking workflow - pulling

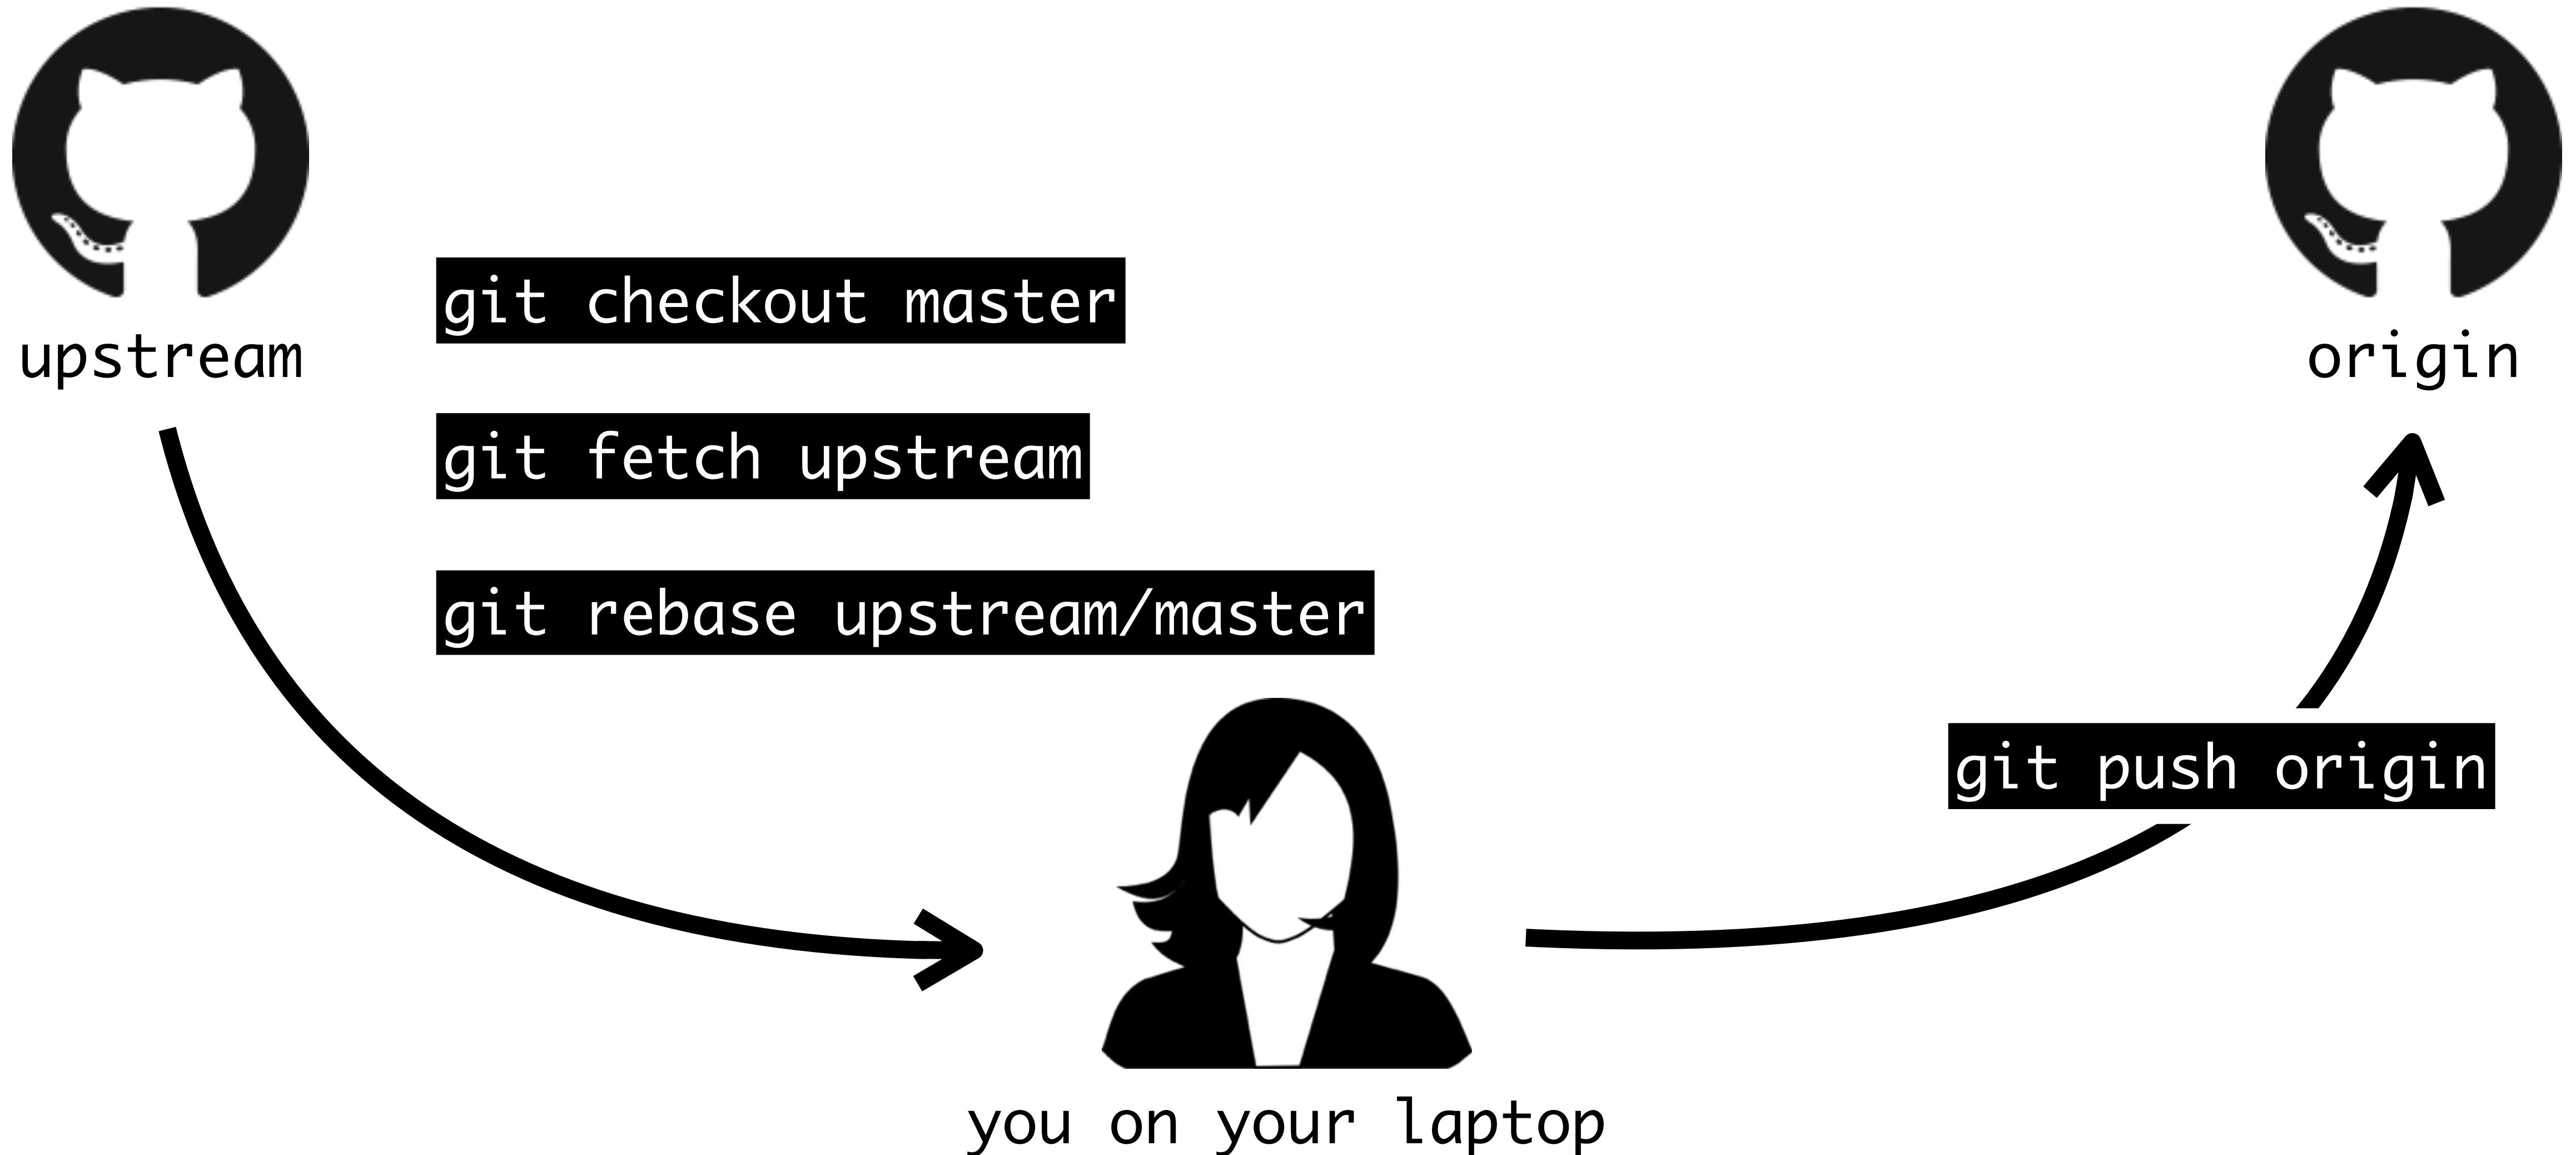

the forking workflow - pushing



upstream



origin

`git checkout master`

`git fetch upstream`


`git rebase upstream/master`

`git checkout -b <new_branch> upstream/master`

`git push --set-upstream origin <new_branch>`



you on your laptop

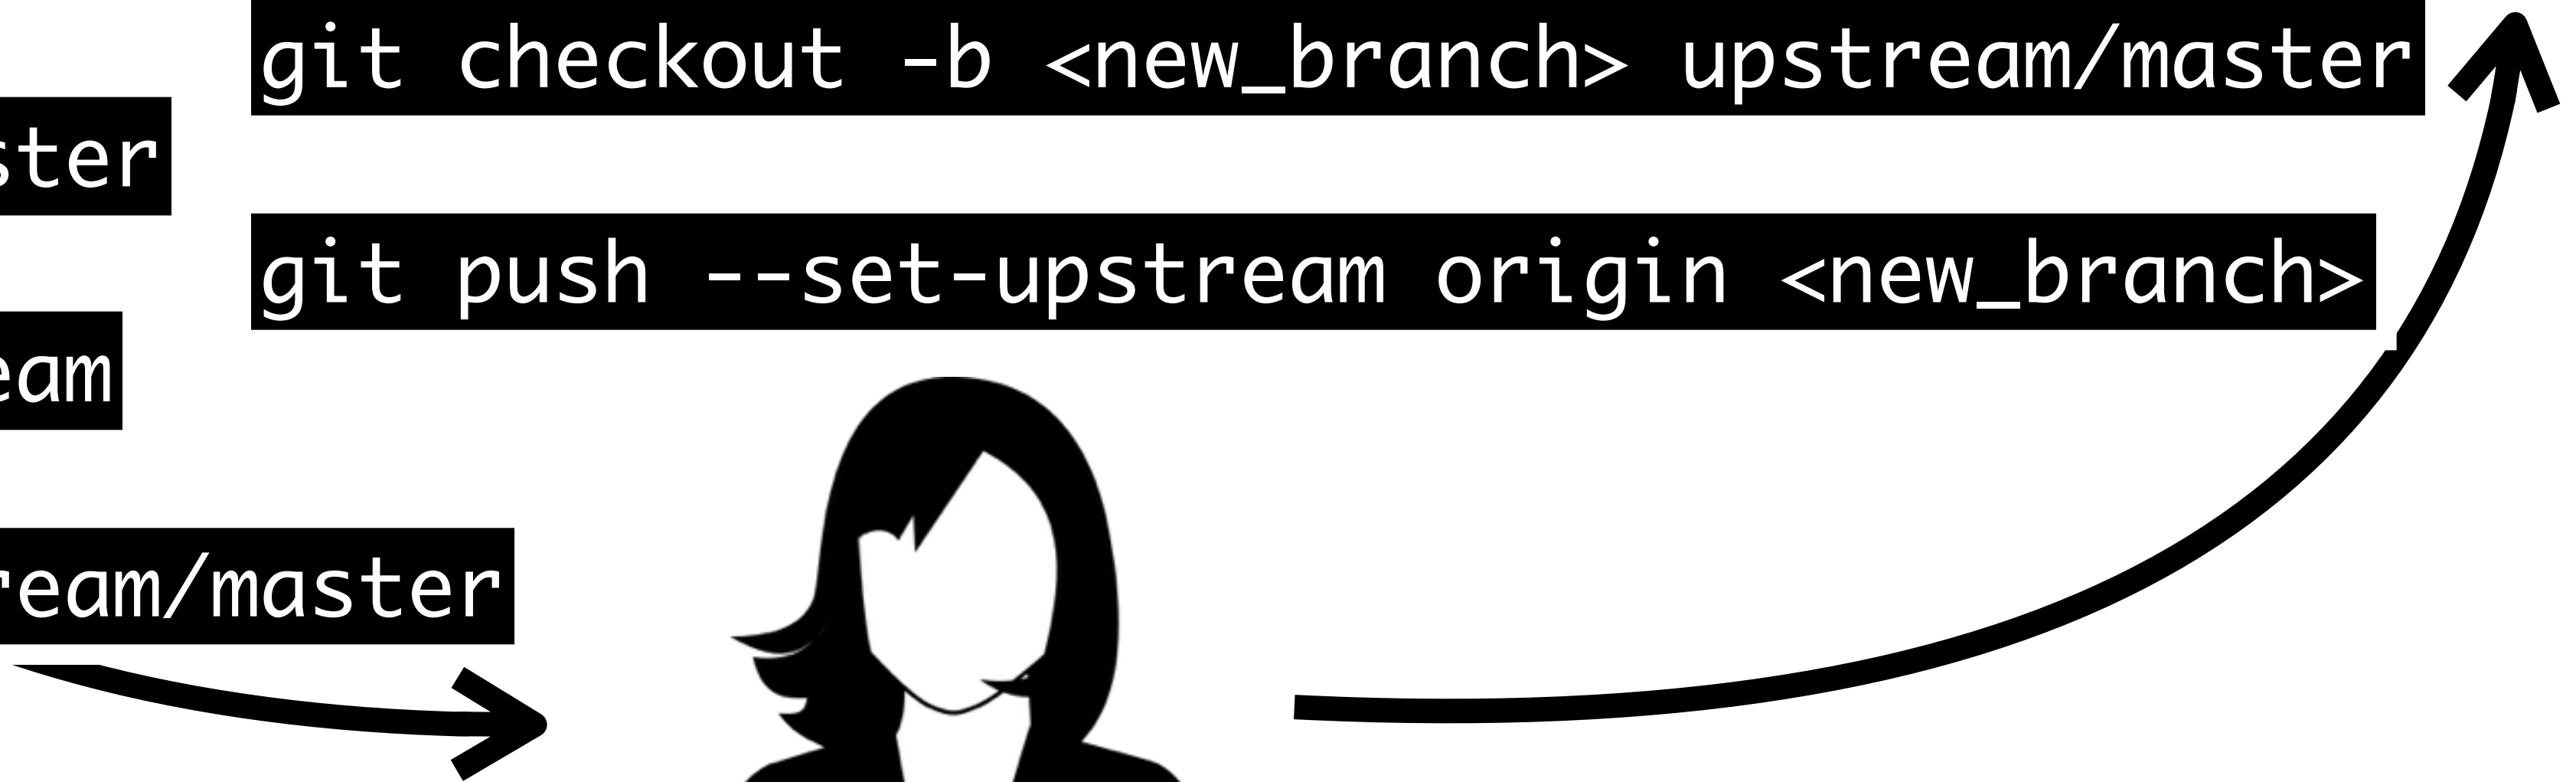

the forking workflow - pushing



upstream



origin

`git checkout master`

`git fetch upstream`

`git rebase upstream/master`

`git checkout -b <new_branch> upstream/master`

`git push --set-upstream origin <new_branch>`

hack - hack - hack

`git commit -a`

`git push origin`



you on your laptop

the forking workflow - pushing



upstream



Pull request



Compare



origin

`git checkout master`

`git fetch upstream`

`git rebase upstream/master`

`git checkout -b <new_branch> upstream/master`

`git push --set-upstream origin <new_branch>`

hack - hack - hack

`git commit -a`

`git push origin`



you on your laptop