AS-SIDQ TAWARRUQ

API INTEGRATION SPECIFICATION

Document Version	2.1
Document Date	30 July 2026
Document Owner	Business Analyst
Approved By	Head of IT
Classification	Confidential

Document Revision History

Version	Date	Description	Author
2.0	23 July 2026	Draft.	Mohd Ishraf Bin Ismail
2.1	30 July 2026	Initial release.	Mohd Ishraf Bin Ismail

Table of Contents

Document Revision History 2
1. Introduction 7
1.1 Purpose 7
1.2 Scope 7
1.3 Document Conventions 7
2. System Overview 8
2.1 Integration Overview 8
2.2 High-Level Integration Architecture 8
2.3 Integration APIs 9
2.3.1 Integration Communication Model 9
2.4 Transaction Flow Overview 9
2.4.1 Trading Transaction Flow 10
2.4.2 Transaction Cancellation Flow 11
3. Authentication and Security 13
3.1 API Endpoint 13
3.2 Authentication 13
3.3 Request Headers 13
3.4 Request Signature 14
3.5 Sensitive Data Encryption 14
3.6 Transport Security 14
3.7 Client Callback Endpoint Requirements 15
4. Common API Conventions 16
4.1 Request Format 16
4.2 Common Response Structure 16
4.3 HTTP Status Codes 16
4.4 Business Response Codes 17
4.5 Error Handling 17
4.6 Duplicate Request and Recovery Handling 18
4.7 Data Types and Naming Convention 18
5. Trading API 19
5.1 Overview 19
5.2 Endpoint 19
5.3 Request Parameters 19
5.4 Request Example 20

5.4.1 Request Using profit_amount 20
5.4.2 Request Using selling_price 20
5.5 Response Parameters 20
5.5.1 Top-Level Response 20
5.5.2 Message Object 20
5.6 Success Response Example 21
5.7 Error Response Example 21
5.8 Business Response Codes 21
5.9 Processing Flow 22
5.10 Important Notes 22
6. Trading Callback API 23
6.1 Overview 23
6.2 Callback Endpoint 23
6.3 Callback Response Parameters 23
6.3.1 Top-Level Response 23
6.3.2 Message Object 23
6.3.3 Callback Object 24
6.3.4 Certificate Number Object 24
6.4 Callback Payload Example 24
6.5 Business Response Codes 25
6.6 Certificate Information 26
6.6.1 Certificate Download 26
6.6.2 Certificate Password 26
6.7 Callback Processing 26
6.8 Callback Response 27
6.9 Important Notes 27
7. Get Trading Status API 28
7.1 Overview 28
7.2 Endpoint 28
7.3 Request Parameters 28
7.4 Request Example 28
7.5 Response Parameters 28
7.5.1 Top-Level Response 28
7.5.2 Message Object 29
7.6 Response Examples 29

7.6.1 Completed Transaction 29
7.6.2 Pending Transaction 30
7.6.3 Failed Transaction 30
7.7 Business Response Codes 30
7.8 Processing Flow 31
7.9 Important Notes 31
8. Cancel Transaction API 32
8.1 Overview 32
8.2 Endpoint 32
8.3 Request Parameters 32
8.4 Request Examples 33
8.4.1 Cancellation Using a Predefined Reason 33
8.4.2 Cancellation Using a Custom Reason 33
8.5 Response Parameters 33
8.5.1 Top-Level Response 33
8.5.2 Message Object 34
8.5.3 Errors Object 34
8.6 Response Examples 34
8.6.1 Successful Submission — 202 34
8.6.2 Cancellation Window Expired — 400 35
8.6.3 Transaction Not Completed — 401 35
8.6.4 Transaction Not Found — 404 35
8.6.5 Duplicate Request — 409 35
8.6.6 Validation Error — 422 36
8.7 Business Response Codes 36
8.8 Processing Flow 37
8.9 Final Cancellation Outcomes 37
8.10 Important Notes 37
9. Operational Support 39
9.1 Overview 39
9.2 Trading Failure Escalation 39
9.3 Support Contact 39
9.4 Service Availability 39
9.5 Incident Investigation 40
9.6 Versioning and Change Management 40

9.7 Important Notes 40

1. Introduction

1.1 Purpose

This document defines the API integration specification between the Client and the As-Sidq Tawarruq Platform. It provides the technical information required for the Client to integrate its applications with the Tawarruq Platform for commodity trading, transaction status enquiry, cancellation requests, callback notifications, and commodity retrieval.

The document serves as the primary reference for application developers, system integrators, and technical teams responsible for implementing and maintaining the integration.

1.2 Scope

The integration supports the complete lifecycle of commodity trading, including trade submission, transaction status enquiry, cancellation requests, callback notifications, and commodity retrieval. The APIs are designed to facilitate secure, real-time communication between the Client's application and the Tawarruq Platform.

The scope of this integration includes:

- Submission of trading transactions.
- Retrieval of transaction status.
- Submission of cancellation requests.
- Asynchronous notification of final trading and cancellation outcomes.
- Authentication and secure API communication.

1.3 Document Conventions

Unless otherwise specified:

- All requests and responses use JSON format.
- All API communication is performed over HTTPS.
- Authentication is performed using a Bearer Token.
- Date and time values are represented either as DateTime in the format yyyy-MM-dd HH:mm:ss or Unix timestamp.
- Clients should use status_code as the primary field for business decision-making. The status_desc field provides the corresponding human-readable description.

2. System Overview

2.1 Integration Overview

The Tawarruq Platform provides a set of RESTful APIs that enable the Client to integrate its applications for real-time commodity trading and transaction management. All APIs are exposed over HTTPS and use JSON as the standard request and response format.


Trading requests are processed asynchronously after the initial request has been accepted by the Tawarruq Platform. Final transaction outcomes are communicated through the Trading Callback API, while the Get Trading Status API enables the Client to retrieve the latest transaction status whenever required.

Cancellation requests follow a similar approach. Eligible requests are accepted for processing and subsequently reviewed by the operations team before the final outcome is communicated through the Trading Callback API and made available via the Get Trading Status API.

The following sections describe the high-level integration architecture, communication model, supported APIs and transaction flows.

2.2 High-Level Integration Architecture

The following diagram illustrates the high-level integration between the Client System and the Tawarruq Platform.

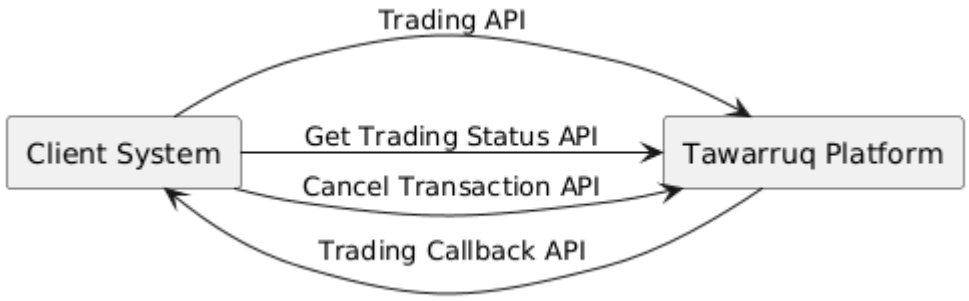

The architecture includes:

- Client System
- Tawarruq Platform
- Trading API
- Get Trading Status API
- Cancel Transaction API
- Trading Callback API (Tawarruq Platform to Client)

2.3 Integration APIs

The integration between the Client and the Tawarruq Platform consists of the following components.

Component	Description
Trading API	Receives new trading requests from the Client. The API validates the request and acknowledges receipt before the trading process is executed asynchronously.
Trading Callback API	Delivers the final outcome of trading and cancellation requests to the Client's callback endpoint. This is the primary mechanism for notifying transaction completion.
Get Trading Status API	Retrieves the latest status and transaction details using the transaction reference number (ref_no).
Cancel Transaction API	Receives cancellation requests for eligible trading transactions. Accepted requests undergo an operational review before the final outcome is communicated to the Client.

2.3.1 Integration Communication Model

The integration uses both synchronous and asynchronous communication.

Synchronous Communication

The following APIs return an immediate response after receiving and validating the request:

- Trading API
- Get Trading Status API
- Cancel Transaction API

The synchronous response indicates whether the request has been accepted or rejected. It does not necessarily represent the final outcome of the trading or cancellation process.

Asynchronous Communication

The Trading Callback API is used by the Tawarruq Platform to notify the Client when a trading or cancellation request reaches its final outcome.

The Get Trading Status API may also be used to retrieve the latest transaction status whenever required.

2.4 Transaction Flow Overview

This section provides a high-level overview of the trading and cancellation workflows supported by the Tawarruq Platform.

2.4.1 Trading Transaction Flow

The Trading API is used to initiate a new trading transaction. Upon successful validation, the Tawarruq Platform acknowledges receipt of the request and processes the transaction asynchronously.

Under normal operating conditions, the trading process is expected to complete within one (1) minute. Transactions that remain pending for more than thirty (30) minutes are automatically updated to FAILED.

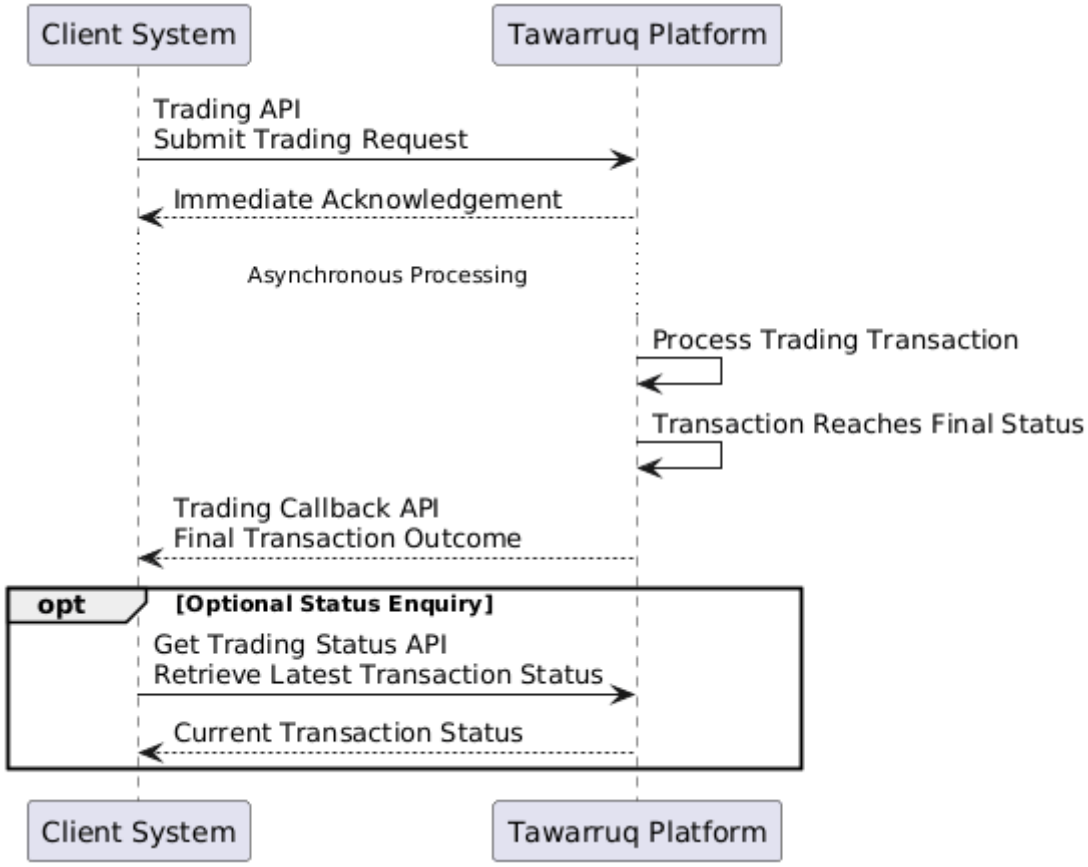


Figure 2-1: Trading Transaction Flow

The trading transaction flow consists of the following high-level steps:

1. The Client submits a trading request using the Trading API.
2. The Tawarruq Platform validates the request and returns an immediate acknowledgement.
3. The Tawarruq Platform processes the trading transaction asynchronously.
4. The transaction reaches a final status.
5. The Tawarruq Platform sends the final transaction outcome to the Client through the Trading Callback API.
6. The Client may retrieve the latest transaction status using the Get Trading Status API.

2.4.2 Transaction Cancellation Flow

The Cancel Transaction API enables the Client to submit a cancellation request for an eligible trading transaction. Accepted requests undergo an operational review before a final decision is made.

A cancellation request is accepted only when the transaction satisfies the applicable cancellation business rules.

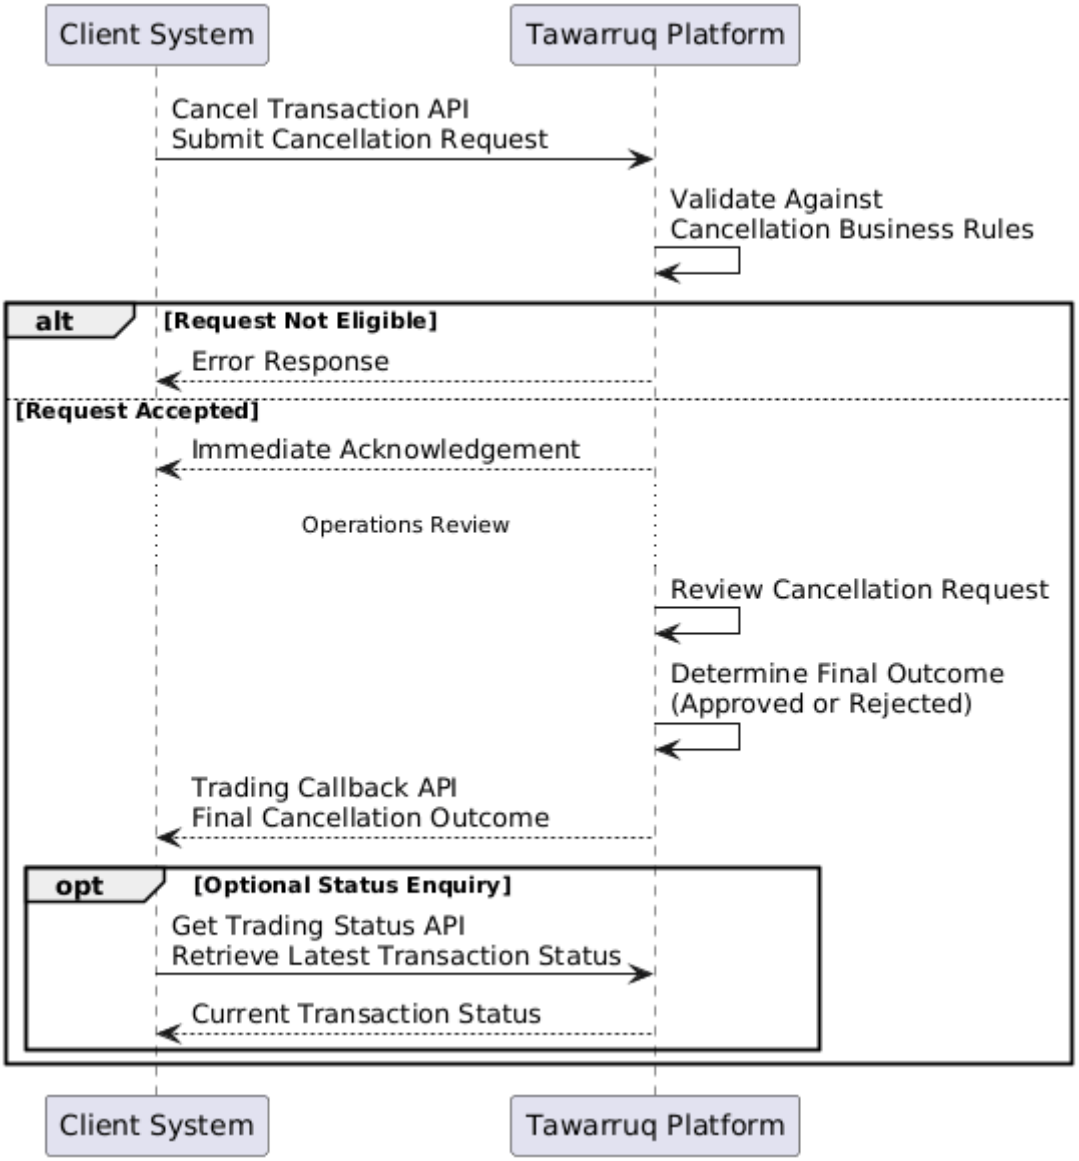


Figure 2-2: Transaction Cancellation Flow

The transaction cancellation flow consists of the following high-level steps:

1. The Client submits a cancellation request using the Cancel Transaction API.
2. The Tawarruq Platform validates the request against the applicable cancellation business rules.
3. If the request is not eligible, the platform returns the appropriate error response.
4. If the request is accepted, the platform returns an acknowledgement indicating that the cancellation request has been submitted successfully.
5. The operations team reviews the cancellation request.
6. Upon completion of the review (approved or rejected), the Tawarruq Platform communicates the final outcome to the Client through the Trading Callback API.
7. The Client may retrieve the latest transaction status using the Get Trading Status API.

3. Authentication and Security

3.1 API Endpoint

The Tawarruq Platform exposes RESTful APIs over HTTPS.

Item	Value
Protocol	HTTPS
Base URL	https://twq-uat.assidqlink.com
Request Format	JSON
Response Format	JSON
Character Encoding	UTF-8

The endpoint above is applicable to the UAT environment. Production endpoint details will be provided separately.

3.2 Authentication

All API requests must be authenticated using a Bearer Token issued by the Tawarruq Platform.

The Bearer Token shall be included in the Authorization request header.

Example:

```
Authorization: Bearer <your_token>
```

Requests without a valid Bearer Token will be rejected.

3.3 Request Headers

The following HTTP headers are supported by the TWQ Platform.

Header	Required	Description
Authorization	Yes	Bearer token issued by the Tawarruq Platform.
Content-Type	Yes	Must be set to application/json.
X-Req-Signature	Optional	SHA-256 digital signature generated from the request body and encoded using Base64. Required only for institutions that have enabled request signing.

Example:

```
Authorization: Bearer eyJhbGciOi...
Content-Type: application/json
X-Req-Signature: AbCdEfGhIjKlMnOpQr...
```

3.4 Request Signature

The X-Req-Signature header provides an additional layer of request integrity verification.

When enabled, the Client shall:

1. Generate a SHA-256 hash of the request body.
2. Encode the generated hash using Base64.
3. Include the resulting value in the X-Req-Signature request header.

This feature is optional and applies only to institutions where request signing has been agreed during implementation.

3.5 Sensitive Data Encryption

To protect sensitive customer information, selected request parameters may be encrypted before transmission.

The following encryption standard is supported:

Algorithm	Mode
AES	AES-256-CBC

The following request parameters support encryption:

API	Field
Trading API	cust_name
Trading API	cust_id

Unless otherwise agreed, all communication between the Client and the Tawarruq Platform is additionally protected using HTTPS/TLS encryption.

3.6 Transport Security

All communication between the Client and the Tawarruq Platform shall be performed over HTTPS.

The platform employs the following security mechanisms:

- HTTPS/TLS encryption for all API communication.
- Bearer Token authentication.
- Optional request signature verification (X-Req-Signature).
- Optional AES-256-CBC encryption for selected request fields.

Clients should ensure that API requests are transmitted only through secure HTTPS connections.

3.7 Client Callback Endpoint Requirements

To receive asynchronous transaction notifications, the Client shall expose an HTTPS endpoint that is accessible by the Tawarruq Platform.

The callback endpoint should meet the following requirements:

Item	Requirement
Protocol	HTTPS
HTTP Method	POST
Content-Type	application/json
Response	HTTP 200 OK

The Client's callback endpoint should return an HTTP 200 OK response after successfully receiving and processing the callback request.

If callback delivery is unsuccessful, the Tawarruq Platform will retry the callback up to three (3) times using an exponential backoff interval of 10 seconds, 30 seconds, and 60 seconds, respectively. If all retry attempts are exhausted without a successful response, the callback will be considered unsuccessful. The Client may subsequently retrieve the latest transaction status using the Get Trading Status API.

4. Common API Conventions

This section defines the common request and response conventions applicable to all APIs exposed by the Tawarruq Platform.

4.1 Request Format

All API requests shall comply with the following requirements.

Item	Value
Content Type	application/json
Character Encoding	UTF-8
HTTP Protocol	HTTPS
Request Body Format	JSON
Numeric Format	Decimal numbers shall use a period (.) as the decimal separator.

All request payloads shall be encoded in UTF-8 and formatted as valid JSON.

4.2 Common Response Structure

Unless otherwise stated, APIs return responses in a common JSON structure.

Field	Description
status_code	Business response code indicating the processing result.
status_desc	Human-readable description of the response status.
message	Additional information or validation details, where applicable.
callback	Callback payload returned by selected APIs, where applicable.

The exact response structure may vary depending on the API being invoked.

4.3 HTTP Status Codes

The Tawarruq Platform uses standard HTTP status codes to indicate whether an HTTP request has been successfully received and processed.

HTTP Status	Description	Client Action
200 OK	Request successfully received and processed. The business outcome shall be determined using the status_code field in the response body.	Process the response and evaluate the status_code field.

404 Not Found	Requested API endpoint does not exist.	Verify the request URL and API version.
405 Method Not Allowed	Unsupported HTTP method.	Use the HTTP method specified in this API specification.
500 Internal Server Error	Unexpected server error.	Retry the request using client retry policy. If the issue persists, contact Tawarruq Platform support.

Note**:** An HTTP 200 OK response indicates that the request was successfully processed at the HTTP protocol level. The actual business outcome of the request shall be determined by the status_code field in the response body.

4.4 Business Response Codes

Each API defines its own business response codes according to its functional requirements.

- The status_code field is the primary field used to determine the outcome of an API request.
- The status_desc field provides a human-readable description of the business response and should not be used for programmatic decision-making.
- Clients should always evaluate the status_code field when determining the result of an API request.

4.5 Error Handling

When an API request cannot be processed successfully, the response will include an appropriate business response code together with additional information where applicable.

Typical error conditions include:

- Missing mandatory parameters.
- Invalid parameter values.
- Authentication failure.
- Duplicate requests.
- Transaction not found.
- Business rule validation failures.

Clients should evaluate the returned status_code before determining whether corrective action or resubmission is required.

4.6 Duplicate Request and Recovery Handling

The ref_no supplied by the Client uniquely identifies a trading transaction. The Client shall ensure that each new transaction is submitted using a unique ref_no.

The Trading API does not return the original successful response when a request is resubmitted using an existing ref_no. A duplicate request will be rejected with status_code = 422, indicating that the ref_no already exists.

A duplicate-reference response does not necessarily indicate that the original transaction failed. The original request may already have been received and processed by the Tawarruq Platform.

If the Client does not receive a response due to a timeout, connection interruption, or other communication failure, the Client shall use the Get Trading Status API with the same ref_no to determine whether the original request was received and to retrieve its latest status.

The Client shall not automatically submit the same business transaction using a new ref_no, as this may result in duplicate transactions.

4.7 Data Types and Naming Convention

Unless otherwise specified, the following conventions apply.

Type	Description
String	UTF-8 encoded text.
Integer	Whole numbers.
Decimal	Numeric value with fractional digits using a period (.) as the decimal separator.
Boolean	true or false
Object	JSON object.
Array	JSON array.

Parameter names are case-sensitive and shall be provided exactly as documented in the API specification.

5. Trading API

5.1 Overview

The Trading API is used to initiate a commodity trading transaction with the Tawarruq Platform.

Upon successful receipt of the request, the Tawarruq Platform validates the request and returns an acknowledgement response. The trading transaction is then processed asynchronously.

The final transaction outcome will be delivered through the Trading Callback API. Alternatively, the Client may retrieve the latest transaction status using the Get Trading Status API.

5.2 Endpoint

Item	Value
HTTP Method	POST
Endpoint	/api/v1/trading
Authentication	Bearer Token
Content-Type	application/json

5.3 Request Parameters

Parameter	Type	Mandatory	Description
ref_no	String (100)	Yes	Unique transaction reference generated by the Client. Only alphanumeric characters are allowed.
cust_name	String (100)	Yes	Customer's name.
cust_id	String (100)	Yes	Customer identification number or unique identifier.
currency	String (10)	No	Currency code of the trading transaction. Defaults to MYR if omitted.
trading_amount	Decimal	Yes	Trading amount for the commodity transaction.
profit_rate	Decimal	No	Profit rate (%) displayed for informational purposes only. This field is not used by the Tawarruq Platform for transaction processing or profit calculation
profit_amount	Decimal	Conditional	Profit amount for the transaction. Required when selling_price is not provided.
selling_price	Decimal	Conditional	Total selling price of the transaction. Required when profit_amount is not provided.
product_code	String (30)	Yes	Product code representing the commodity trading product.
keep_commodity	String (1)	No	Indicates whether the customer wishes to retain ownership of the commodity. Accepted values are Y (Keep commodity) and N (Do not keep commodity). Defaults to N if omitted.

5.4 Request Example

5.4.1 Request Using profit_amount

```
{
  "ref_no": "20260730000111",
  "cust_name": "Customer A",
  "cust_id": "201010108888",
  "trading_amount": 2000,
  "profit_amount": 200,
  "product_code": "P01",
}
```

5.4.2 Request Using selling_price

```
{
  "ref_no": "20260730000111",
  "cust_name": "Customer A",
  "cust_id": "201010108888",
  "trading_amount": 2000,
  "selling_price": 2200,
  "product_code": "P01",
}
```

5.5 Response Parameters

The Trading API returns a JSON response indicating whether the trading request was successfully accepted for processing or rejected due to validation or system errors.

5.5.1 Top-Level Response

Parameter	Type	Mandatory	Description
ref_no	String (100)	Yes	Transaction reference supplied by the Client.
status_code	Integer	Yes	Business response code indicating the outcome of the request validation.
status_desc	String (100)	Yes	Description of the business response code.
message	Object	Yes	Contains the response description and, where applicable, validation error information.

5.5.2 Message Object

Parameter	Type	Mandatory	Description
description	String(255)	Yes	Human-readable description of the response.
errors	String(255)	Conditional	Validation error details. Present when status_code = 422.

5.6 Success Response Example


```
{
  "ref_no": "20260730000111",
  "status_code": 200,
  "status_desc": "SUCCESS",
  "message": {
    "description": "Trading data imported"
  }
}
```


5.7 Error Response Example


```
{
  "ref_no": "202607*30000112",
  "status_code": 422,
  "status_desc": "VALIDATION FAILED",
  "message": {
    "description": "Validation errors",
    "errors": "The ref no format is invalid"
  }
}
```


5.8 Business Response Codes

The following business response codes may be returned by the Trading API to indicate the outcome of the trading request submission. Clients should use the status_code field as the primary indicator when determining the result of the API request and perform the corresponding action based on the returned response code.

Status Code	Status Description	Description	Client Action
200	SUCCESS	Trading request has been successfully received and accepted for processing.	Await the Trading Callback API for the final transaction outcome or use the Get Trading Status API if required.
422	VALIDATION FAILED	One or more request parameters failed validation.	Correct the validation errors and submit a new request.
500	FAILED	An unexpected server-side error occurred while processing the request.	Do not automatically resubmit the request. Contact the Tawarruq Platform support team for further information or assistance if necessary.

5.9 Processing Flow

The Trading API follows an asynchronous processing model.

1. The Client submits a trading request to the Trading API.
2. The Tawarruq Platform validates the request parameters.
3. If validation is successful, the platform returns an acknowledgement response with status_code = 200.
4. The trading transaction is processed asynchronously.
5. Upon completion, the final transaction outcome is delivered through the Trading Callback API.
6. If required, the Client may retrieve the latest transaction status using the Get Trading Status API.

5.10 Important Notes

- Each trading request shall use a unique ref_no.
- Receipt of status_code = 200 indicates that the request has been accepted for processing only. It does not indicate that the trading transaction has been completed successfully.
- The Trading Callback API is the primary mechanism for communicating the final transaction outcome.
- The Get Trading Status API may be used to enquire on the latest transaction status.
- Monetary values shall be provided as decimal numbers using a period (.) as the decimal separator.
- The keep_commodity parameter is optional. If provided, only the values Y and N are accepted.

6. Trading Callback API

6.1 Overview

The Trading Callback API is used by the Tawarruq Platform to notify the Client of the final outcome of a trading transaction.

Upon completion of the trading process, the Tawarruq Platform sends an HTTP POST request to the Client's registered callback endpoint containing the final transaction status and the relevant transaction details.

The Trading Callback API serves as the primary mechanism for communicating the final outcome of a trading transaction.

6.2 Callback Endpoint

The Client shall provide an HTTPS endpoint that is accessible by the Tawarruq Platform.

Item	Value
HTTP Method	POST
Endpoint	To be provided by the Client
Content-Type	application/json

6.3 Callback Response Parameters

The Trading Callback API returns the final outcome of the trading transaction together with the transaction details and, where applicable, the cancellation rejection reason.

6.3.1 Top-Level Response

Parameter	Type	Mandatory	Description
ref_no	String (100)	Yes	Transaction reference supplied by the Client.
status_code	Integer	Yes	Business response code indicating the final transaction outcome.
status_desc	String (100)	Yes	Business response description corresponding to the returned status_code.
message	Object	Yes	Contains the callback response description and, where applicable, the cancellation rejection reason.
callback	Object	Yes	Contains the transaction details and certificate information.

6.3.2 Message Object

Parameter	Type	Mandatory	Description

description	String (255)	Yes	Human-readable description of the callback result.
rejection_reason	String(255)	Conditional	Reason the cancellation request was rejected.

6.3.3 Callback Object

Parameter	Type	Mandatory	Description
ref_no	String (100)	Yes	Transaction reference number.
trading_status	String (100)	Yes	Final trading status.
delivery_order_no	String (100)	Yes	Delivery Order (DO) reference number.
cert_no	Object	Conditional	Certificate number object.
cert	String(500)	Yes	URL to retrieve the commodity certificate.
cust_name	String (100)	Yes	Customer name.
cust_id	String (100)	Yes	Customer identification number.
supplying_party	String (100)	Yes	Commodity supplier.
buying_party	String (100)	Yes	Commodity buyer.
issue_date	Integer	Yes	Certificate issue date as a Unix timestamp (seconds since the Unix epoch).
commodity_type	String (50)	Yes	Commodity type.
value	Decimal	Yes	Commodity value.
unit	Integer	Yes	Commodity quantity.

6.3.4 Certificate Number Object

Parameter	Type	Mandatory	Description
A	String(100)	Conditional	Certificate number for Trading Leg 1.
B	String(100)	Conditional	Certificate number for Trading Leg 2.
C	String(100)	Conditional	Certificate number for Trading Leg 3.

6.4 Callback Payload Example

```
{
  "ref_no": "240720260006",
  "status_code": 201,
  "status_desc": "CANCELLATION_REJECTED",
  "message": {
    "description": "Trading completed - Cancellation request rejected",
    "rejection_reason": "Rejection reason"
  },
  "callback": {
    "ref_no": "240720260006",
    "trading_status": "CANCELLATION_REJECTED",
    "delivery_order_no": "DO20260724-010-240720260006",
    "cert_no": {
      "A": "AC260724-XX-01E03D6292C6",
      "B": "BC260724-XX-01E03D6292C6",
      "C": "CC260724-XX-01E03D6292C6"
    },
    "cert": "https://twq-
uat.assidqlink.com/api/v1/streamPdf?ref_no=240720260006&client=JDQdx&leg=master&type=master_
cert%22,
    "cust_name": "Customer Name",
    "cust_id": "240720260006",
    "supplying_party": "Company 1",
    "buying_party": "Company 2",
    "issue_date": 1784879737,
    "commodity_type": "TELCO_AIRTIME",
    "value": "1000.00",
    "unit": 1
  }
}
```


6.5 Business Response Codes

The following business response codes may be returned by the Trading Callback API to indicate the final transaction outcome.

Status Code	Status Description	Description	Client Action
200	COMPLETE	Trading completed successfully.	Record the transaction as completed and proceed according to the Client's business rules.
201	CANCELLATION_REJECTED	Cancellation request rejected. The original trading transaction remains valid.	Continue treating the original trading transaction as active. Contact the Tawarruq Platform support team for further information or assistance if necessary.
203	KEEP	Trading completed successfully and the commodity is retained.	Record the transaction status. Await further

			instructions from the Tawarruq support team regarding the subsequent actions.
400	CANCELED	Trading transaction cancelled successfully.	Update the transaction status to cancelled.
500	FAILED	Trading transaction failed.	Do not automatically resubmit the request. Contact the Tawarruq Platform support team for further information or assistance if necessary.

6.6 Certificate Information

The callback includes the information required to retrieve the generated certificate.

6.6.1 Certificate Download

Parameter	Type	Mandatory	Description
cert	String(500)	Yes	URL to retrieve the commodity certificate.

6.6.2 Certificate Password

The downloaded PDF certificate is password protected.

The password is constructed using the following format:

```
<institution_prefix>@<ref_no>
```

Example

```
ABCDE@20260630000011
```

6.7 Callback Processing

Upon receiving the callback request, the Client should:

1. Validate the received payload.
2. Match the transaction using the ref_no.
3. Update the transaction based on the received status_code.
4. Store the certificate numbers returned in the callback (optional).
5. Download the certificate when required (optional).
6. Return an HTTP 200 OK response after successful processing.

6.8 Callback Response

The Client should return an HTTP 200 OK response after successfully processing the callback request.

Example:

```
HTTP/1.1 200 OK
```

No response body is required.

6.9 Important Notes

- The Trading Callback API is the primary mechanism for communicating the final outcome of a trading transaction.
- One callback is generated for each transaction after it reaches a final status.
- The callback includes the information required to identify the transaction and retrieve the generated certificate.
- If the Client does not receive the callback, the latest transaction status may be retrieved using the Get Trading Status API.

7. Get Trading Status API

7.1 Overview

The Get Trading Status API is used to retrieve the latest status of a trading transaction.

This API allows the Client to enquire on the current status of a previously submitted trading transaction using the transaction reference number (ref_no).

The Trading Callback API remains the primary mechanism for notifying the Client of the final transaction outcome. This API is intended for status enquiry when required.

7.2 Endpoint

Item	Value
HTTP Method	GET
Endpoint	/api/v1/trading/status
Authentication	Bearer Token
Content-Type	application/json

7.3 Request Parameters

Parameter	Type	Mandatory	Description
ref_no	String (100)	Yes	Unique transaction reference generated by the Client.

7.4 Request Example

```
GET /api/v1/trading/status?ref_no=20260730000111
```

7.5 Response Parameters

7.5.1 Top-Level Response

Parameter	Type	Mandatory	Description
ref_no	String (100)	Yes	Unique transaction reference generated by the Client.
status_code	Integer	Yes	Business response code indicating the latest transaction status.
status_desc	String (30)	Yes	Business response description.
message	Object	Yes	Message object.

7.5.2 Message Object

Parameter	Type	Mandatory	Description
description	String (255)	Yes	Description of the current transaction status.

7.6 Response Examples

7.6.1 Completed Transaction


```
{
  "ref_no": "20260730000111",
  "status_code": 200,
  "status_desc": "COMPLETE",
  "message": {
    "description": "Trading completed"
  },
  "callback": {
    "ref_no": "20260730000111",
    "trading_status": "COMPLETE",
    "delivery_order_no": "DO20260730-010-20260730000111",
    "cert_no": {
      "A": "AC260731-XX-554F4E1FEA0E",
      "B": "BC260731-XX-554F4E1FEA0E",
      "C": "CC260731-XX-554F4E1FEA0E"
    },
    "cert": "https://twq-uat.assidqlink.com/api/v1/streamPdf?ref_no=20260730000111&client=JDQdx&leg=master&type=...",
    "cust_name": "Customer A",
    "cust_id": "201010108888",
    "supplying_party": "DEXASIA TECHNOLOGIES SDN BHD",
    "buying_party": "ASIANA KENCANA SDN BHD",
    "issue_date": 1785463766,
    "commodity_type": "TELCO_AIRTIME",
    "value": "2000.00",
    "unit": 2
  }
}
```

7.6.2 Pending Transaction


```
{
  "ref_no": "20260730000111",
  "status_code": 202,
  "status_desc": "PENDING",
  "message": {
    "description": "Trading is being processed."
  }
}
```


7.6.3 Failed Transaction


```
{
  "ref_no": "20260730000111",
  "status_code": 500,
  "status_desc": "FAILED",
  "message": {
    "description": "Trading failed."
  }
}
```


7.7 Business Response Codes

The following business response codes may be returned by the Get Trading Status API to indicate the latest transaction status.

Status Code	Status Description	Description	Client Action
200	COMPLETE	Trading completed successfully.	Record the transaction as completed and proceed according to the Client's business rules.
201	CANCELLATION_ REJECTED	The cancellation request was rejected. The original trading transaction remains valid.	Continue treating the original trading transaction as active. Contact the Tawarruq support team for further information or assistance if necessary.
202	PENDING	Trading transaction is currently being processed.	Wait for the Trading Callback API or enquire again later.
203	KEEP	Trading completed successfully and the commodity has been retained.	Record the transaction status. Await further instructions from the Tawarruq support team regarding the subsequent actions.

399	CANCELLATION_PENDING	Cancellation request is currently under review.	Wait for the final callback notification or enquire again later.
400	CANCELED	Trading transaction has been cancelled successfully.	Update the transaction status to Cancelled.
404	NOT_FOUND	Transaction reference was not found.	Verify the transaction reference and submit the enquiry again.
422	VALIDATION_FAILED	One or more request parameters failed validation.	Correct the request and submit the enquiry again.
500	FAILED	Trading transaction failed.	Do not automatically resubmit the request. Contact the Tawarruq Platform support team for further information or assistance if necessary.

7.8 Processing Flow

1. The Client submits a status enquiry using the transaction reference number (ref_no).
2. The Tawarruq Platform validates the request.
3. If the request is valid, the latest transaction status is returned.
4. The Client determines the current transaction state based on the returned status_code.

7.9 Important Notes

- The Get Trading Status API is intended solely for transaction status enquiries.
- The Trading Callback API remains the primary mechanism for communicating the final transaction outcome.
- This API returns only the latest transaction status and does not include the detailed callback payload.
- Clients should use the status_code field as the primary field for programmatic decision-making.
- The status_desc field is provided for readability and should not be used as the primary decision field.

8. Cancel Transaction API

8.1 Overview

The Transaction Cancellation API is used to submit a request to cancel a previously completed trading transaction.

Upon receiving a cancellation request, the Tawarruq Platform validates the submitted parameters and evaluates the applicable business rules before accepting the request for further processing.

A successful response with status_code = 202 indicates that the cancellation request has been submitted successfully. It does not indicate that the trading transaction has already been cancelled.

The final cancellation outcome will be communicated through the Trading Callback API. The Client may also retrieve the latest transaction status using the Get Trading Status API.

8.2 Endpoint

Item	Value
HTTP Method	POST
Endpoint	/api/v1/cancellation/request
Authentication	Bearer Token
Content-Type	application/json

8.3 Request Parameters

Parameter	Type	Mandatory	Description
ref_no	String (100)	Yes	Transaction reference number of the trading transaction to be cancelled. Must match an existing trading transaction.
reason	String (50)	Yes	Reason for submitting the cancellation request. Refer below for supported cancellation reasons
other_reason	String (255)	Conditional	Custom explanation for the cancellation request. Required when reason is set to others.

Supported Cancellation Reasons

Value	Description
incorrect_customer_details	Incorrect customer information was submitted.
incorrect_financing_amount	Incorrect financing amount was submitted.
incorrect_profit_rate	Incorrect profit rate was submitted.
others	A cancellation reason not covered by the predefined values.

8.4 Request Examples

8.4.1 Cancellation Using a Predefined Reason

```
{
  "ref_no": "20260730000111",
  "reason": "incorrect_financing_amount"
}
```

8.4.2 Cancellation Using a Custom Reason

```
{
  "ref_no": "20260730000111",
  "reason": "others",
  "other_reason": "Customer requested cancellation"
}
```

8.5 Response Parameters

The Transaction Cancellation API returns a JSON response containing the transaction reference, processing status, response message, and where applicable, cancellation request details or validation errors.

8.5.1 Top-Level Response

The Transaction Cancellation API returns a common top-level response structure.

Parameter	Type	Mandatory	Description
ref_no	String (100)	Yes	Transaction reference number associated with the cancellation request.
status_code	Integer	Yes	Business response code indicating the outcome of the request.
status_desc	String (50)	Yes	Response status corresponding to the returned status_code.
message	Object	Yes	Contains the response description and, where applicable, validation errors. See Section 9.5.2.
request_id	Integer	Conditional	Unique cancellation request identifier.
status	String(20)	Conditional	Current processing status of the cancellation request.
reason	String(100)	Conditional	Cancellation reason submitted by the Client.
submitted_at	DateTime	Conditional	Date and time the cancellation request was submitted, in yyyy-MM-dd HH:mm:ss format.

8.5.2 Message Object

Parameter	Type	Mandatory	Description
description	String(255)	Yes	Human-readable description of the response.
errors	Object	Conditional	Validation error details. See Section 9.5.3.

8.5.3 Errors Object

The errors object is returned only when status_code = 422 (VALIDATION_ERROR).

Parameter	Type	Mandatory	Description
reason	Array of String	Conditional	Validation error(s) related to the reason field.
other_reason	Array of String	Conditional	Validation error(s) related to the other_reason field.

8.6 Response Examples

8.6.1 Successful Submission — 202


```
{
  "ref_no": "20260730000111",
  "status_code": 202,
  "status_desc": "SUCCESS",
  "message": {
    "description": "Cancellation request submitted successfully. Use the status checker API to monitor transaction status."
  },
  "request_id": 801,
  "status": "pending",
  "reason": "Incorrect financing amount",
  "submitted_at": "2026-07-30 10:26:11"
}
```


A successful response indicates that the cancellation request has been accepted for further processing. It does not indicate that the transaction has already been cancelled.

8.6.2 Cancellation Window Expired — 400


```
{
  "ref_no": "260722000008",
  "status_code": 400,
  "status_desc": "CANCELLATION_WINDOW_EXPIRED",
  "message": {
    "description": "Cancellation request can only be submitted within 24 hours of transaction creation"
  }
}
```


8.6.3 Transaction Not Completed — 401


```
{
  "ref_no": "DP2607270000004",
  "status_code": 401,
  "status_desc": "TRANSACTION_NOT_COMPLETED",
  "message": {
    "description": "Transaction has not completed"
  }
}
```


8.6.4 Transaction Not Found — 404


```
{
  "ref_no": "DP2607270000002s",
  "status_code": 404,
  "status_desc": "TRANSACTION_NOT_FOUND",
  "message": {
    "description": "Transaction not found or does not belong to your institution"
  }
}
```


8.6.5 Duplicate Request — 409


```
{
  "ref_no": "DP2607270000002",
  "status_code": 409,
  "status_desc": "DUPLICATE_REQUEST",
  "message": {
    "description": "Cancellation request already exists for this transaction"
  }
}
```

8.6.6 Validation Error — 422


```
{
  "ref_no": "DP2607270000002s",
  "status_code": 422,
  "status_desc": "VALIDATION_ERROR",
  "message": {
    "description": "Validation failed",
    "errors": {
      "reason": [
        "The selected reason is invalid."
      ]
    }
  }
}
```


8.7 Business Response Codes

The following business response codes may be returned by the Cancel Transaction API to indicate the outcome of the cancellation request.

Status Code	Status Description	Description	Client Action
202	SUCCESS	The cancellation request has been submitted and is pending further processing.	Await the final result through the Trading Callback API or use the Get Trading Status API to retrieve the latest status.
400	CANCELLATION_WINDOW_EXPIRED	The permitted cancellation period has expired.	Do not resubmit the request. The transaction is no longer eligible for cancellation.
401	TRANSACTION_NOT_COMPLETED	The transaction has not reached a completed state and is not eligible for cancellation.	Wait for the trading transaction to reach a final state before determining whether a cancellation request is required.
404	TRANSACTION_NOT_FOUND	No transaction was found for the supplied ref_no.	Verify the transaction reference number before submitting another request.
409	DUPLICATE_REQUEST	A cancellation request already exists for the transaction.	Do not submit another request. Await the result of the existing cancellation request.
422	VALIDATION_ERROR	One or more request parameters failed validation.	Correct the fields identified in the message.errors object and submit the request again.

8.8 Processing Flow

1. The Client submits a cancellation request using the transaction reference number (ref_no) and cancellation reason.
2. The Tawarruq Platform validates the request and confirms that:
    1. the transaction exists;
    2. the transaction status is COMPLETE;
    3. the request is submitted within 24 hours from the transaction creation time; and
    4. no existing cancellation request has already been submitted.
3. If the request is accepted, the platform returns status_code = 202 and records the cancellation request as Pending.
4. The platform notifies the support team, who will review and approve or reject the request within 12 hours.
5. The final outcome is communicated through the Trading Callback API. The Client may also use the Get Trading Status API to retrieve the latest status.

8.9 Final Cancellation Outcomes

The following final outcomes may be returned after the cancellation request has been processed:

Status Code	Status Description	Description
201	CANCELLATION_REJECTED	The cancellation request was rejected, and the original trading transaction remains valid.
400	CANCELED	The cancellation request was approved, and the trading transaction was cancelled successfully.

These final statuses are communicated through the Trading Callback API and are also available through the Get Trading Status API.

8.10 Important Notes

- A cancellation request may only be submitted for a trading transaction with a status of COMPLETE and within 24 hours from the transaction creation time.
- A successful response (status_code = 202) indicates only that the cancellation request has been accepted for processing. It does not indicate that the transaction has been cancelled.
- The cancellation request will be reviewed by the support team. The final outcome will be communicated through the Trading Callback API and may also be retrieved using the Get Trading Status API.

- Clients should use the status_code field as the primary indicator when determining the result of the API request.
- Additional cancellation request information (request_id, status, reason, and submitted_at) is returned only when the request is successfully accepted (status_code = 202).
- Validation errors are returned only for status_code = 422 within the message.errors object. Clients should correct the reported validation errors before submitting a new request.
- A duplicate cancellation request (status_code = 409) indicates that a cancellation request is already being processed or has previously been submitted for the same transaction.

9. Operational Support

9.1 Overview

This section describes the operational support process for issues related to the Tawarruq Platform API integration.

Where a transaction cannot be completed successfully or an unexpected issue occurs, the Client should follow the procedures described in this section to facilitate timely investigation and resolution.

9.2 Trading Failure Escalation

If a trading transaction cannot be completed successfully and the issue cannot be resolved through the Trading Callback API or the Get Trading Status API, the Client should contact the Tawarruq Platform support team.

When reporting an issue, the Client should provide sufficient information to assist with the investigation.

The following information should be included where available:

Information	Description
Transaction Reference (ref_no)	Unique transaction reference.
Transaction Date and Time	Date and time the request was submitted.
API Name	API involved (e.g. Trading API, Cancellation API).
Response Details	status_code, status_desc, and message returned by the API.
Supporting Information	Any additional information that may assist the investigation.

9.3 Support Contact

For operational support or technical enquiries, please contact:

Item	Details
Email	tawarruq.support@sedaniagroup.com
Support Hours	Monday to Friday, 9:00 AM – 6:00 PM (Malaysia Time), excluding public holidays.

9.4 Service Availability

The Tawarruq Platform APIs are designed to support continuous service availability.

Scheduled maintenance activities that may affect API availability will be communicated to Clients in advance through the agreed communication channels.

9.5 Incident Investigation

Upon receiving a support request, the Tawarruq team will:

1. Verify the reported transaction.
2. Investigate the transaction processing records.
3. Provide findings and recommended actions to the Client.

9.6 Versioning and Change Management

The Tawarruq Platform may introduce new API versions or enhancements from time to time.

Where changes affect existing integrations, Clients will be notified in advance to allow sufficient time for implementation and testing.

Backward compatibility will be maintained where reasonably practicable.

9.7 Important Notes

- The ref_no is the primary identifier used during operational investigations.
- Clients should retain their API request and response logs for troubleshooting purposes.
- The Trading Callback API and Get Trading Status API should be used to verify transaction outcomes before raising an operational support request.
- Production support requests should include sufficient information to facilitate timely investigation.

End of Document