


JOB AUTOMATION WITH CRONJOB

GUIDED BY : VUPUL MISTRI

Q.1 Create a cronjob that runs every day at 8:00 AM and appends the current date and time to a file named mylog.txt in your home directory.


ANS :

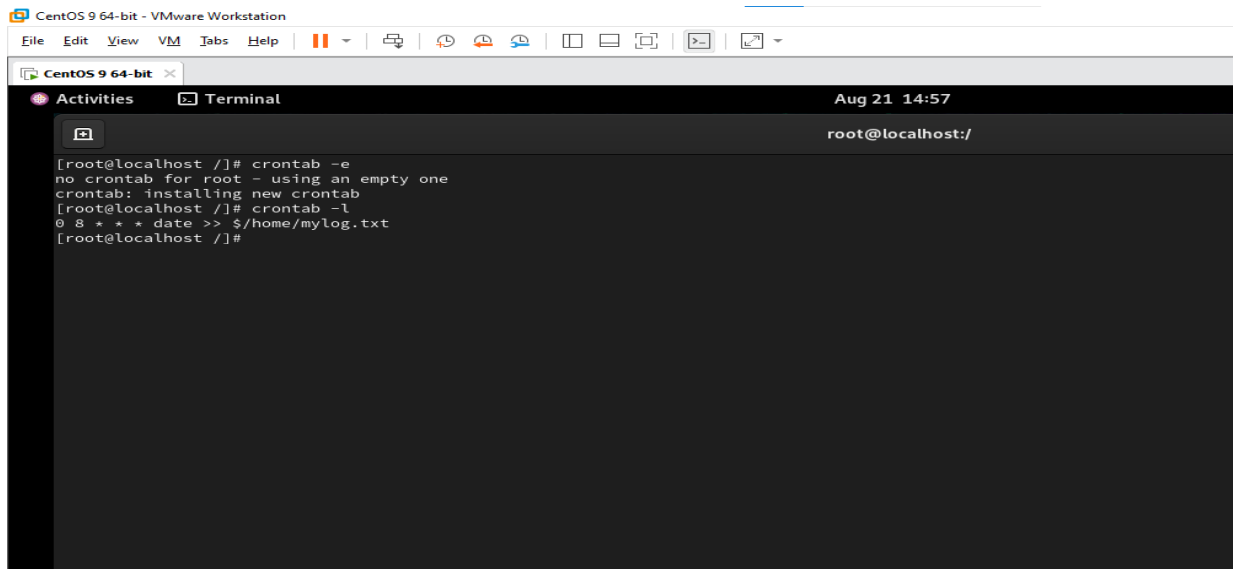

```
CentOS 9 64-bit - VMware Workstation
File Edit View VM Tabs Help
CentOS 9 64-bit
Activities Terminal
root@localhost:/
[root@localhost ~]# crontab -e
no crontab for root - using an empty one
crontab: installing new crontab
[root@localhost ~]# crontab -l
0 8 * * * date >> ~/home/mylog.txt
[root@localhost ~]#
```

Q.2 Set up a cronjob to back up a folder named 'music' from your Downloads directory to a 'backup_music' folder inside your Documents every Sunday at 11:30 PM. Hint: Use the cp -r command in your cronjob.

ANS :

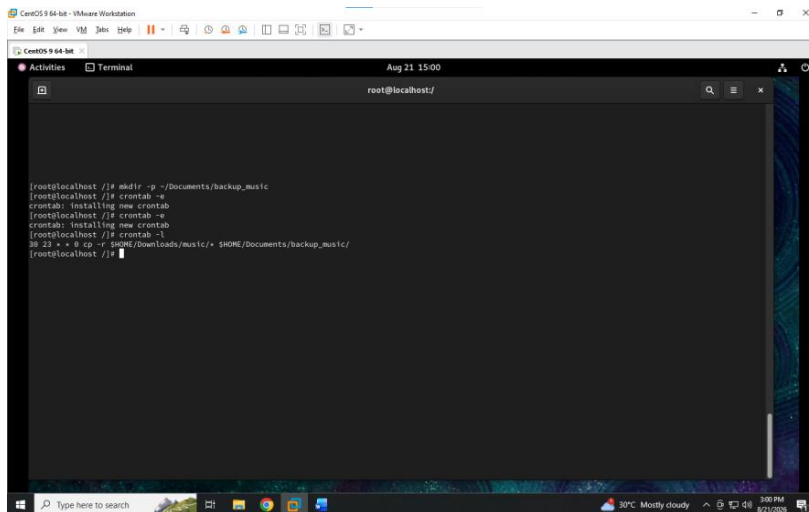

```
CentOS 9 64-bit - VMware Workstation
File Edit View VM Tabs Help
CentOS 9 64-bit
Activities Terminal
root@localhost:/
[root@localhost ~]# mkdir -p ~/Documents/backup_music
[root@localhost ~]# crontab -e
crontab: installing new crontab
[root@localhost ~]# crontab -l
0 11:30 * * * cp -r ~/Downloads/music/* ~/HOME/Documents/backup_music/
[root@localhost ~]#
```


JOB AUTOMATION WITH CRONJOB

GUIDED BY : VUPUL MISTRI


```
[root@localhost ~]# mkdir -p ~/Documents/backup_music
[root@localhost ~]# crontab -e
crontab: installing new crontab
[root@localhost ~]# crontab -e
crontab: installing new crontab
[root@localhost ~]# crontab -l
30 23 * * 0 cp -r $HOME/Downloads/music/* $HOME/Documents/backup_music/
[root@localhost ~]# crontab -e
crontab: installing new crontab
[root@localhost ~]# crontab -e
crontab: no changes made to crontab
[root@localhost ~]# crontab -l
30 23 * * 0 cp -r $HOME/Downloads/music/* $HOME/Documents/backup_music/
0 * * * * find $HOME/Desktop -type f -name "*.tmp" -print -delete >> $HOME/deleted_tmp.log 2>&1
[root@localhost ~]# crontab -e
crontab: no changes made to crontab
[root@localhost ~]# crontab -l
30 23 * * 0 cp -r $HOME/Downloads/music/* $HOME/Documents/backup_music/
0 * * * * find $HOME/Desktop -type f -name "*.tmp" -print -delete >> $HOME/deleted_tmp.log 2>&1
[root@localhost ~]#
```

JOB AUTOMATION WITH CRONJOB

GUIDED BY : VUPUL MISTRI

Q.4 Temporarily disable a cronjob that prints 'Time for a break!' every 2 hours, without deleting the job. Then, re-enable it after 5 minutes. Hint: Use the comment (#) character to disable and enable lines in your crontab.

ANS :

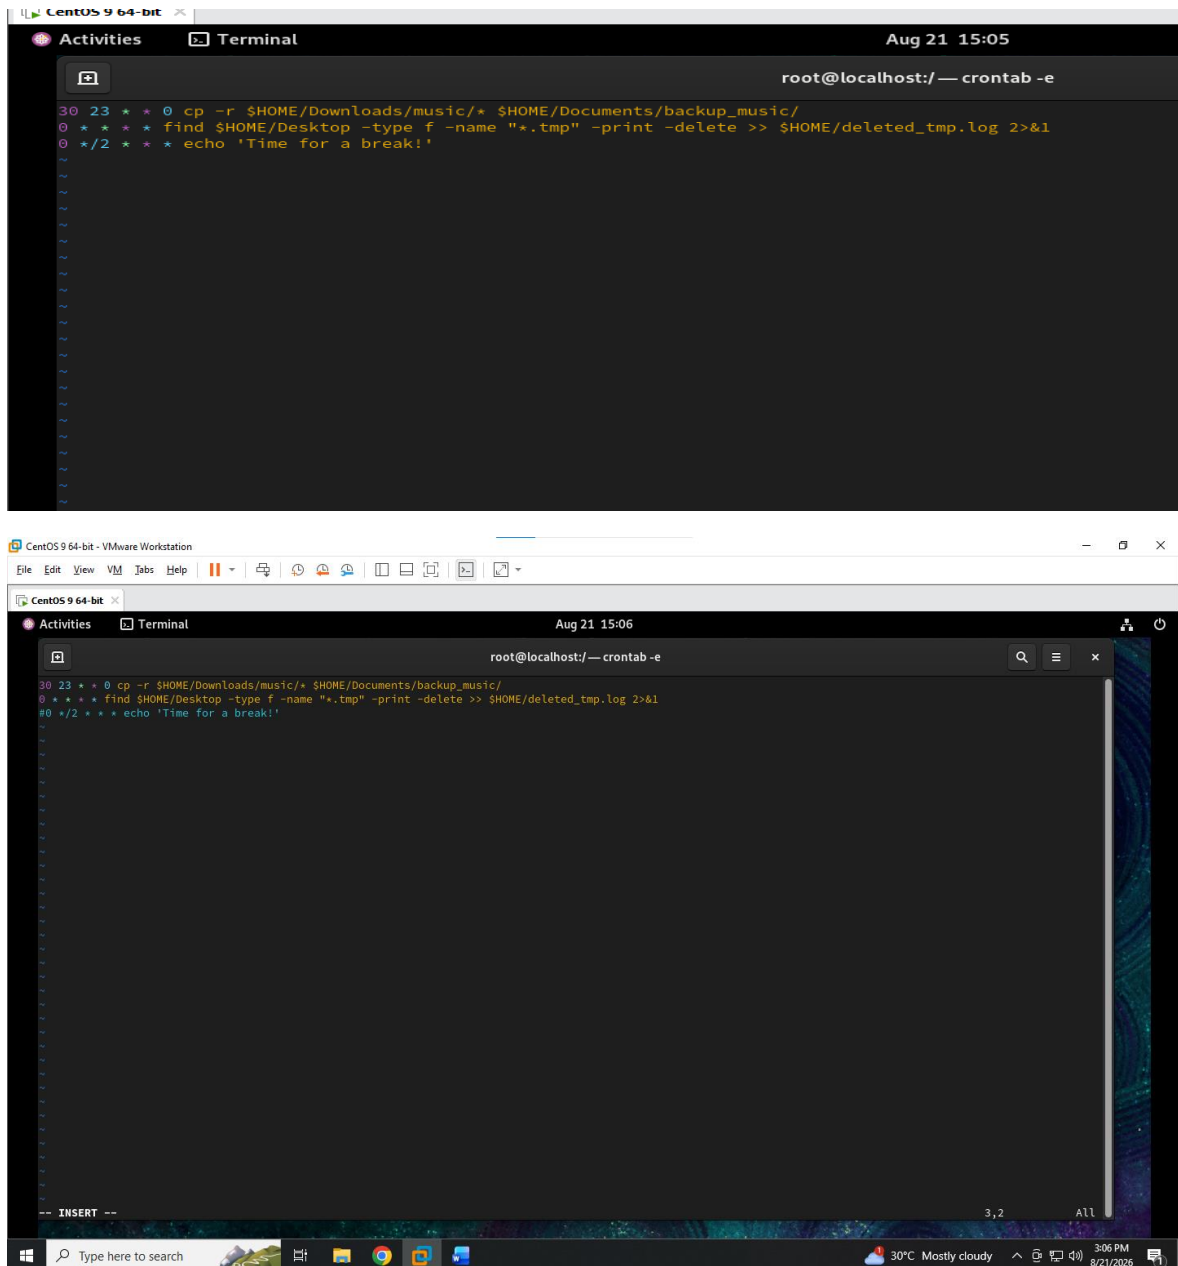

```
CentOS 9 64-bit
Activities Terminal
root@localhost:~ — crontab -e
30 23 * * 0 cp -r $HOME/Downloads/music/* $HOME/Documents/backup_music/
0 * * * find $HOME/Desktop -type f -name "*.tmp" -print -delete >> $HOME/deleted_tmp.log 2>&1
0 */2 * * * echo 'Time for a break!'

-- INSERT --
```

```
CentOS 9 64-bit - VMware Workstation
File Edit View VM Tabs Help
CentOS 9 64-bit
Activities Terminal
root@localhost:~ — crontab -e
30 23 * * 0 cp -r $HOME/Downloads/music/* $HOME/Documents/backup_music/
0 * * * find $HOME/Desktop -type f -name "*.tmp" -print -delete >> $HOME/deleted_tmp.log 2>&1
#0 */2 * * * echo 'Time for a break!'


-- INSERT --
```

JOB AUTOMATION WITH CRONJOB

GUIDED BY : VUPUL MISTRI

Q.5 Use ChatGPT or another AI tool to generate a cron expression for running a script every weekday at 7:45 PM, then test it by creating a cronjob that echoes 'Dinner Reminder' into dinner.txt at the scheduled time.

ANS :

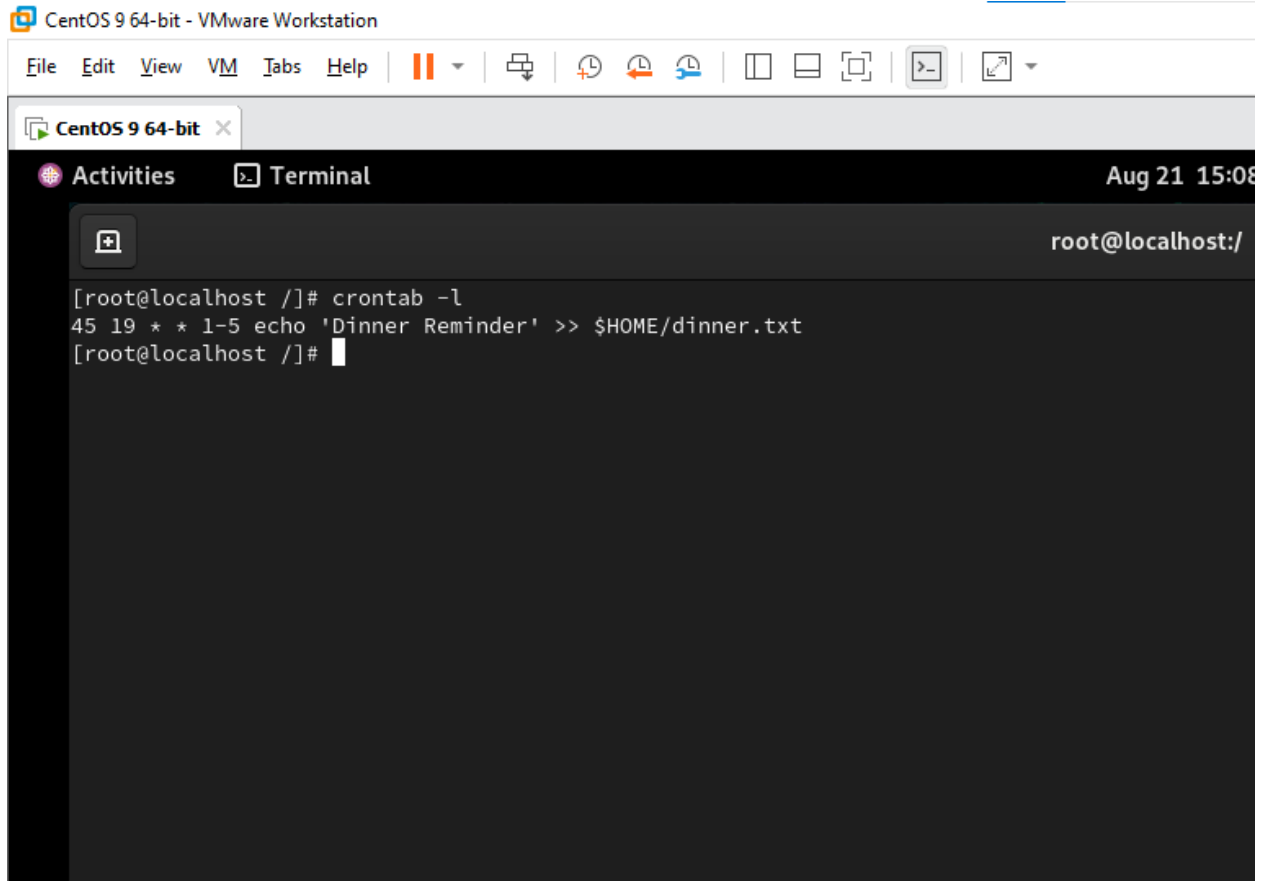

The screenshot shows a terminal window titled 'CentOS 9 64-bit - VMware Workstation'. The terminal is running as root on localhost. The user has entered the command `crontab -l` to list the current crontab, which shows a single entry: `45 19 * * 1-5 echo 'Dinner Reminder' >> $HOME/dinner.txt`. The prompt is now `[root@localhost ~]#`.

```
[root@localhost ~]# crontab -l
45 19 * * 1-5 echo 'Dinner Reminder' >> $HOME/dinner.txt
[root@localhost ~]#
```