


MODULE-2 : LINUX BASIC COMMAND

GUIDED BY : VIPUL MISTRI

Q.1 Open your Linux terminal and use the pwd, ls, and cd commands to navigate to your Downloads folder and list all files inside it.


ANS:

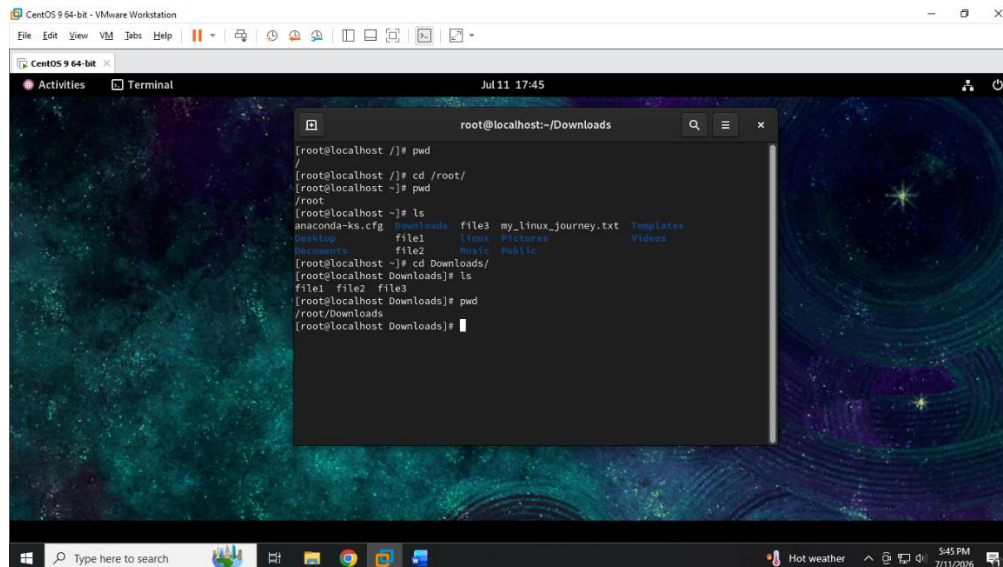

```
root@localhost:~/Downloads
[root@localhost ~]# pwd
/
[root@localhost ~]# cd /root/
[root@localhost ~]# pwd
/root
[root@localhost ~]# ls
anaconda-ks.cfg  Downloads  file3  my_linux_journey.txt  Templates
Desktop          file1     linux  Pictures              Videos
Documents        file2     music  Public
[root@localhost ~]# cd Downloads/
[root@localhost Downloads]# ls
file1  file2  file3
[root@localhost Downloads]# pwd
/root/Downloads
[root@localhost Downloads]#
```

Q.2 Create a new directory called 'music_playlist' inside your home directory using the mkdir command, then use the touch command to create three empty files named song1.mp3, song2.mp3, and song3.mp3 inside it.

ANS:

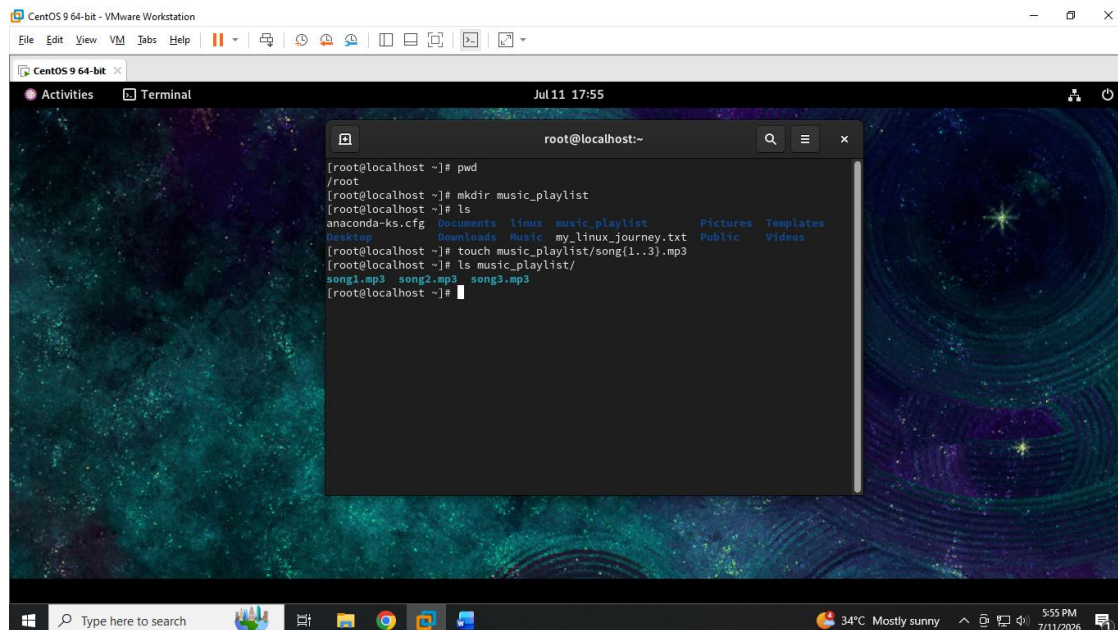


```
root@localhost:~
[root@localhost ~]# pwd
/root
[root@localhost ~]# mkdir music_playlist
[root@localhost ~]# ls
anaconda-ks.cfg  Documents  linux  music_playlist  Pictures  Templates
Desktop          Downloads  music  my_linux_journey.txt  Public  Videos
[root@localhost ~]# touch music_playlist/song(1..3).mp3
[root@localhost ~]# ls music_playlist/
song1.mp3  song2.mp3  song3.mp3
[root@localhost ~]#
```

MODULE-2 : LINUX BASIC COMMAND

GUIDED BY : VIPUL MISTRI

Q.3 Use the cp command to copy all files from your 'music_playlist' directory to a new directory called 'backup_playlist', then use the ls command to verify the files were copied.

ANS:

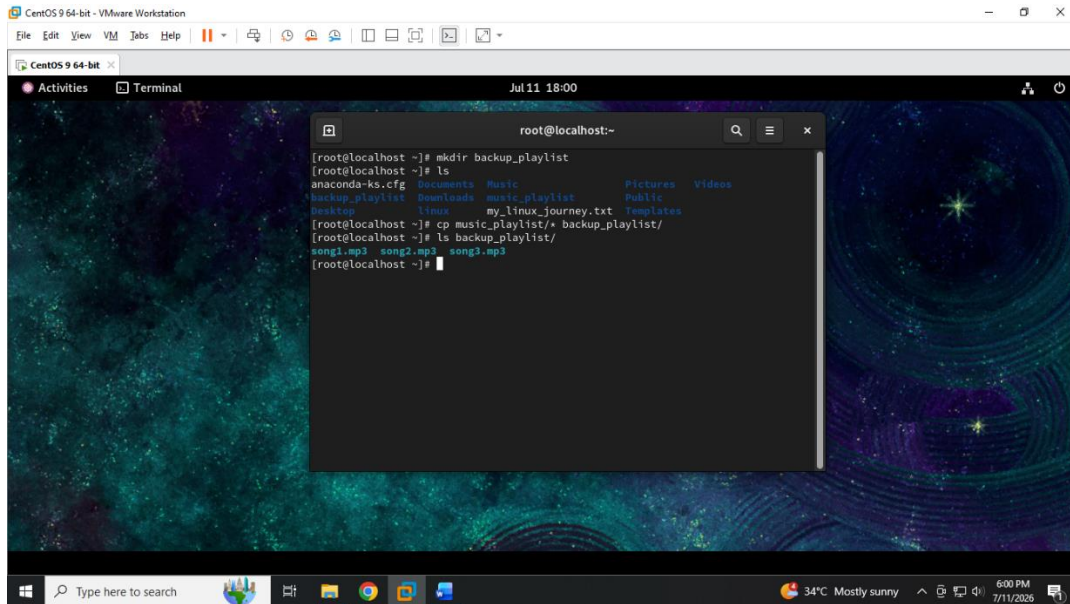


```
CentOS 9 64-bit - VMware Workstation
File Edit View VM Tabs Help
CentOS 9 64-bit x
Activities Terminal Jul 11 18:00
root@localhost:~
[root@localhost ~]# mkdir backup_playlist
[root@localhost ~]# ls
anaconda-ks.cfg  Downloads  music_playlist  Pictures  Videos
backup_playlist  linux      my_linux_journey.txt  Public
[root@localhost ~]# cp music_playlist/* backup_playlist/
[root@localhost ~]# ls backup_playlist/
song1.mp3  song2.mp3  song3.mp3
[root@localhost ~]#
```

Q.4 Use the mv command to rename 'song1.mp3' to 'favorite_song.mp3' inside the 'music_playlist' directory, and then use the rm command to delete 'song3.mp3' from the same directory. Hint: Make sure you are inside the correct directory before running mv or rm.

ANS :

MODULE-2 : LINUX BASIC COMMAND

GUIDED BY : VIPUL MISTRI

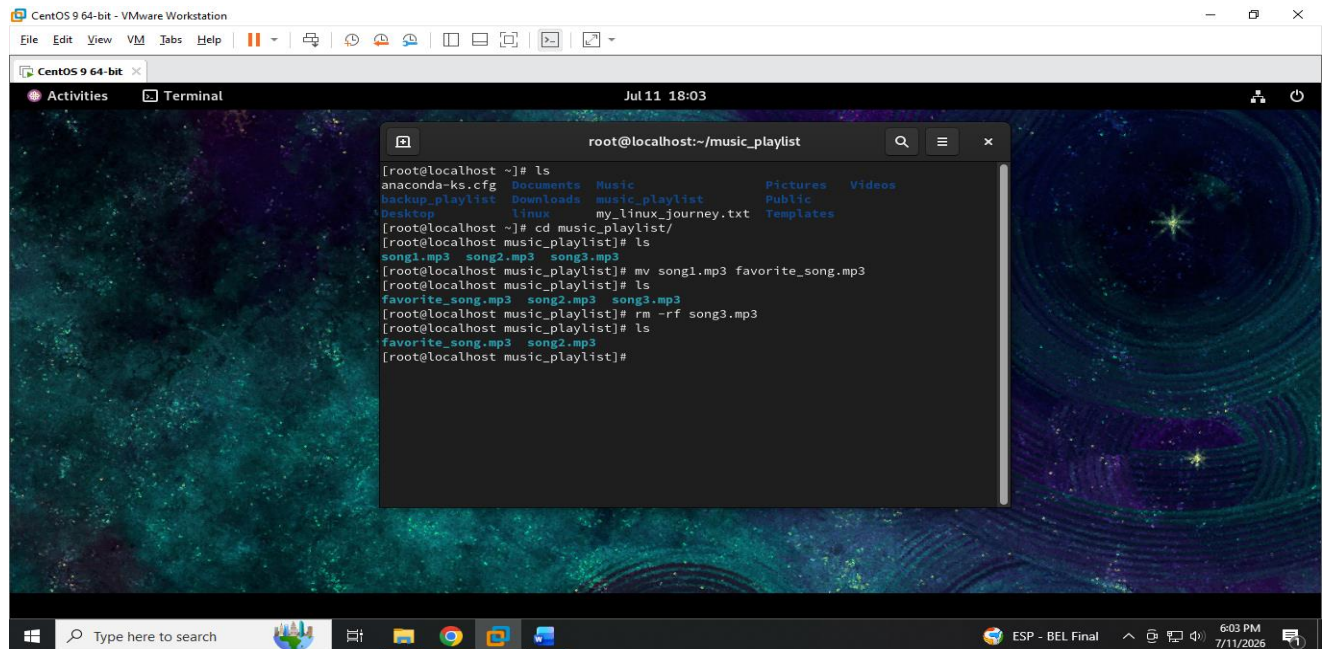

The screenshot shows a CentOS 9 64-bit VM window with a terminal open. The terminal title is 'root@localhost: ~/music_playlist'. The terminal output shows the following commands and their results:

```
[root@localhost ~]# ls
anaconda-ks.cfg  Documents  Music      Pictures  Videos
backup_playlist Downloads music_playlist Public
Desktop         linux     my_linux_journey.txt Templates
[root@localhost ~]# cd music_playlist/
[root@localhost music_playlist]# ls
song1.mp3  song2.mp3  song3.mp3
[root@localhost music_playlist]# mv song1.mp3 favorite_song.mp3
[root@localhost music_playlist]# ls
favorite_song.mp3  song2.mp3  song3.mp3
[root@localhost music_playlist]# rm -rf song3.mp3
[root@localhost music_playlist]# ls
favorite_song.mp3  song2.mp3
[root@localhost music_playlist]#
```

The terminal window is titled 'root@localhost: ~/music_playlist' and shows the following commands and their output:

```
[root@localhost ~]# ls
anaconda-ks.cfg  Documents  Music      Pictures  Videos
backup_playlist  Downloads  music_playlist  Public
Desktop         linux     my_linux_journey.txt  Templates
[root@localhost ~]# cd music_playlist/
[root@localhost music_playlist]# ls
song1.mp3  song2.mp3  song3.mp3
[root@localhost music_playlist]# mv song1.mp3 favorite_song.mp3
[root@localhost music_playlist]# ls
favorite_song.mp3  song2.mp3  song3.mp3
[root@localhost music_playlist]# rm -rf song3.mp3
[root@localhost music_playlist]# ls
favorite_song.mp3  song2.mp3
[root@localhost music_playlist]#
```