


MODULE-3: LINUX INSTALLATION AND SYSTEM CONFIGURATIONS AND USER&GROUP MANAGEMENT

GUIDED BY : VIPUL MISTRI



Q.1 Install Ubuntu Server (or CentOS) on VirtualBox or VMware, take a screenshot of your running login screen, and save it as install_success.png.

ANS :

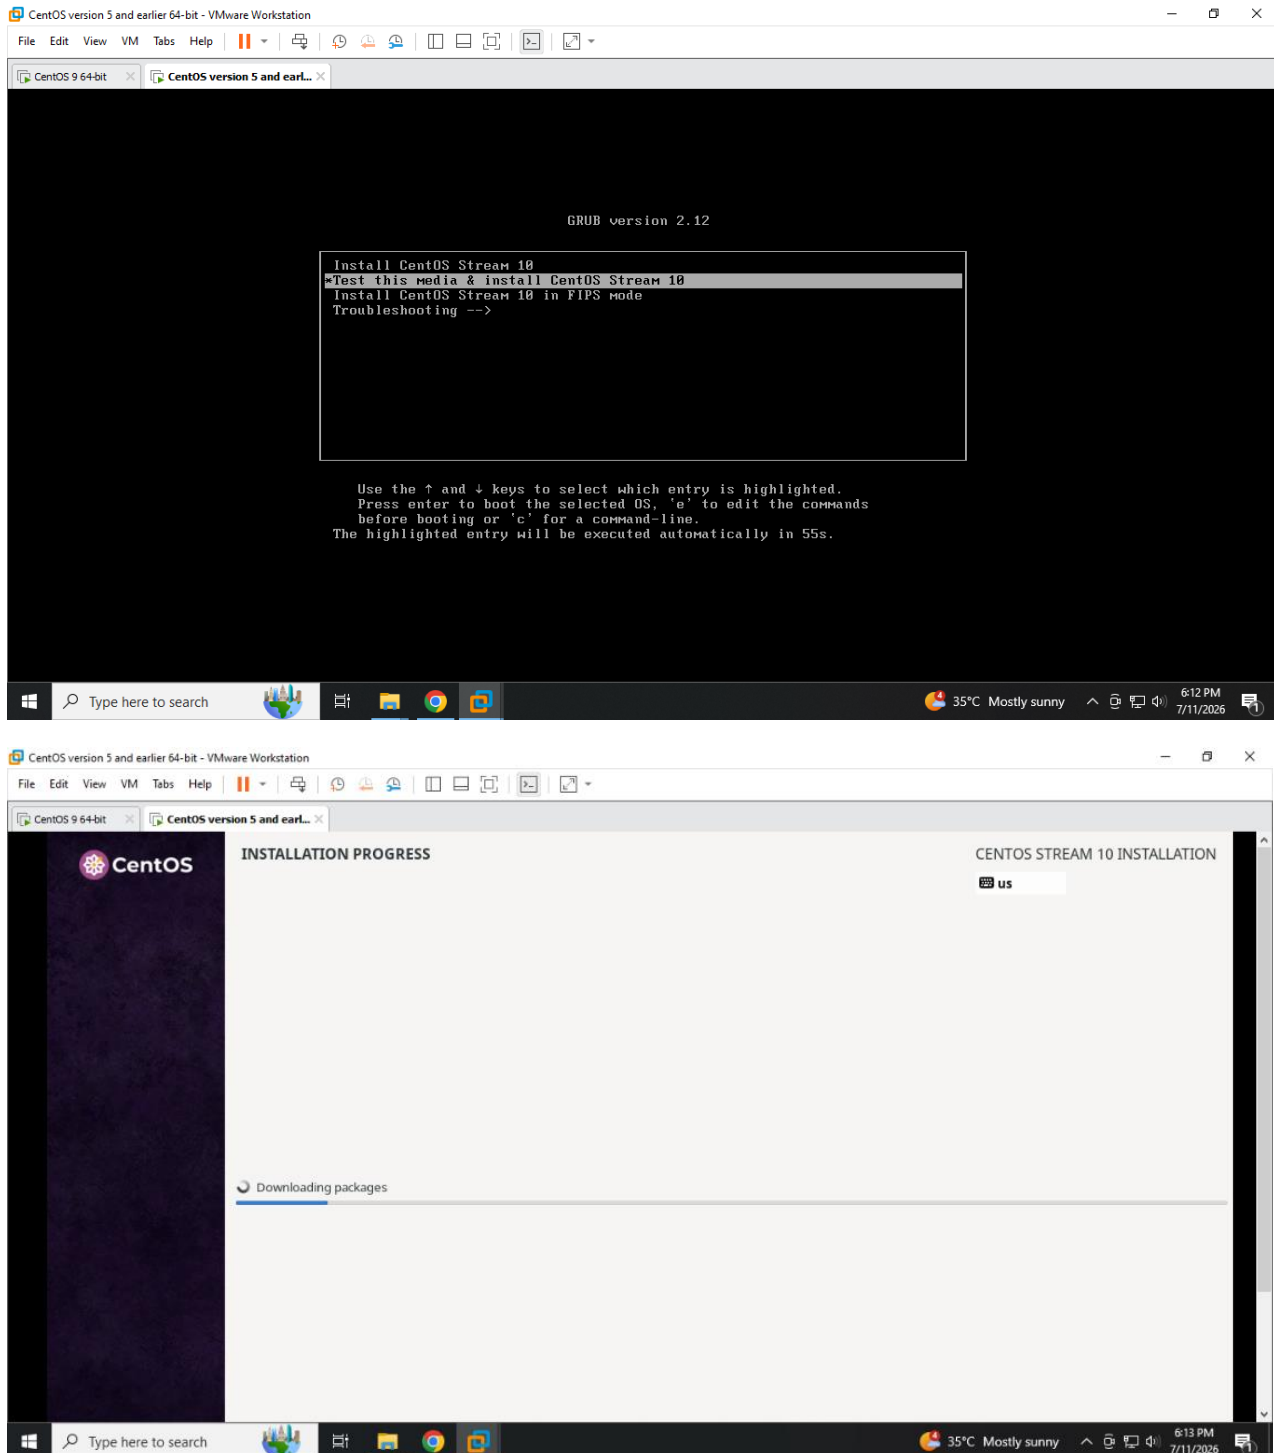

MODULE-3: LINUX INSTALLATION AND SYSTEM CONFIGURATIONS AND USER&GROUP MANAGEMENT

GUIDED BY : VIPUL MISTRI

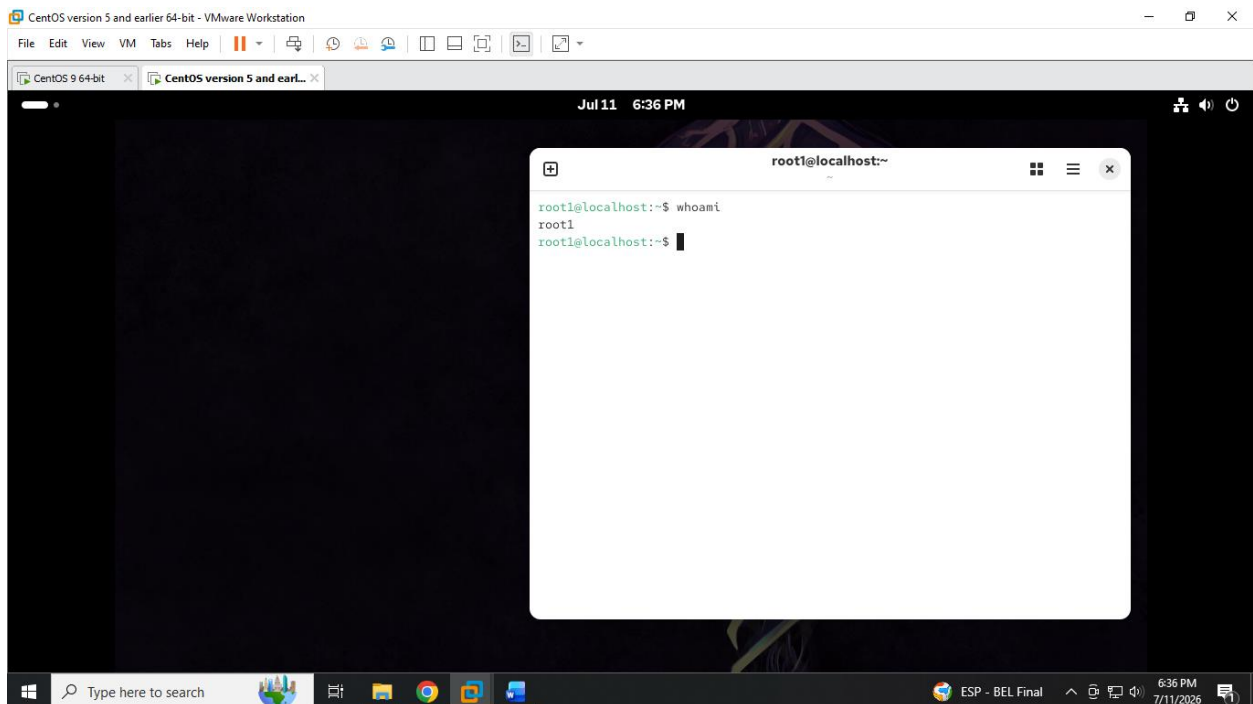
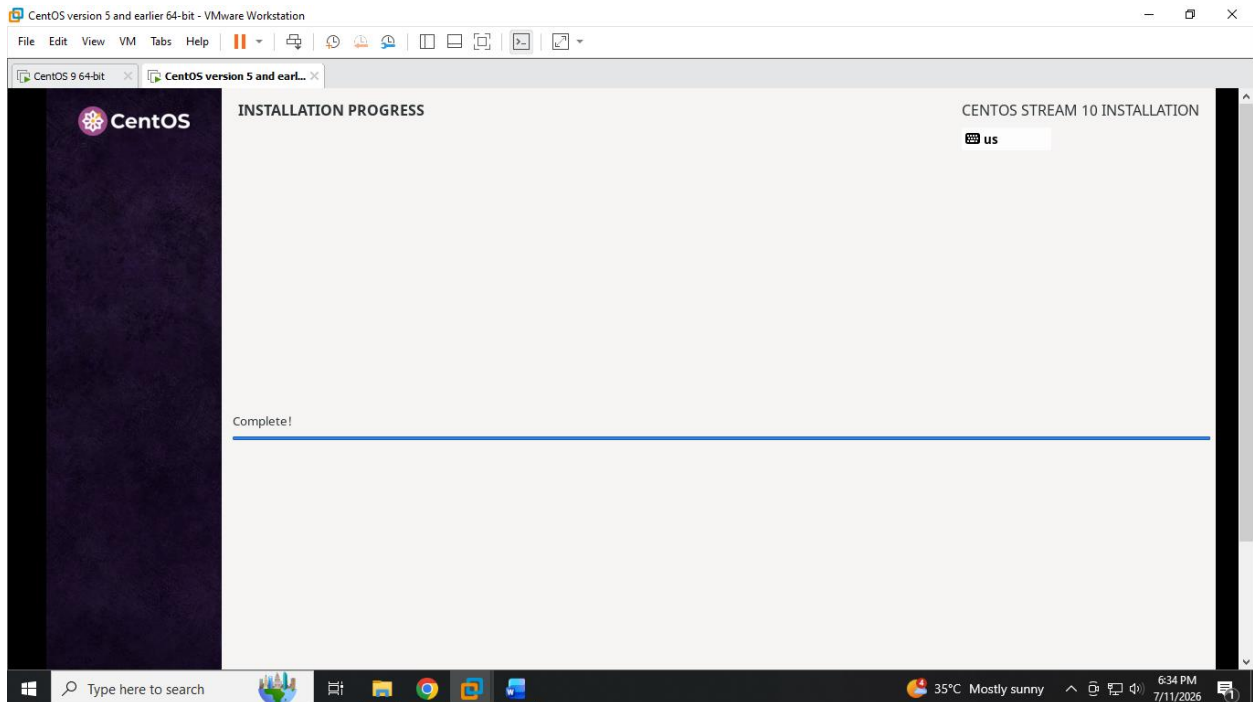


MODULE-3: LINUX INSTALLATION AND SYSTEM CONFIGURATIONS AND USER&GROUP MANAGEMENT

GUIDED BY : VIPUL MISTRI

Q.2 Change the hostname of your Linux VM to 'myfoodiebox' using the hostnamectl command, then verify the change by running the hostname command.

ANS :

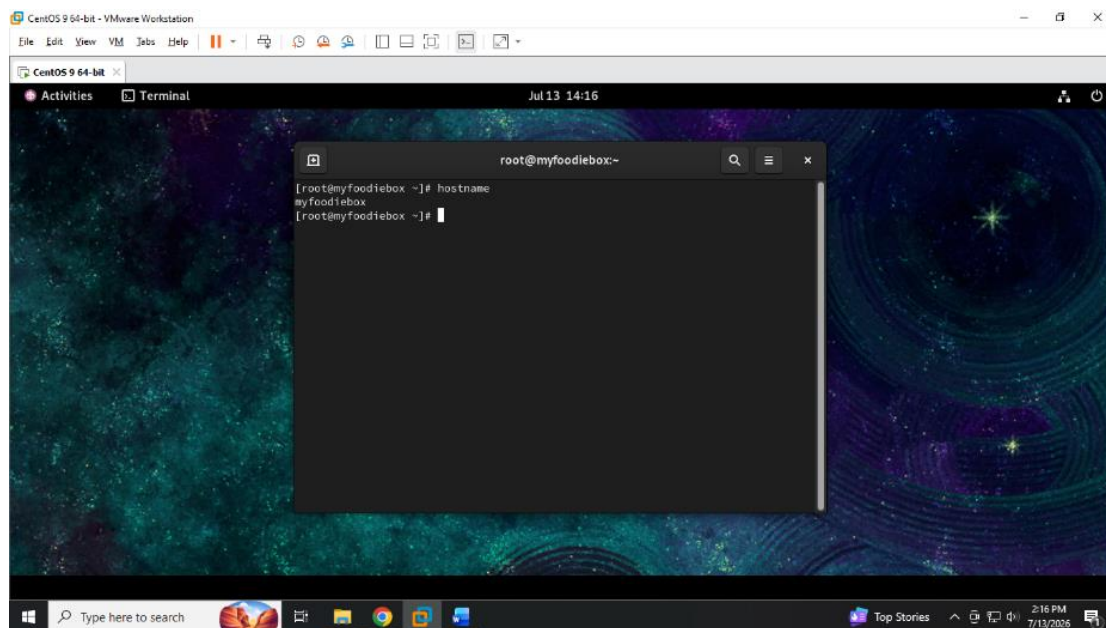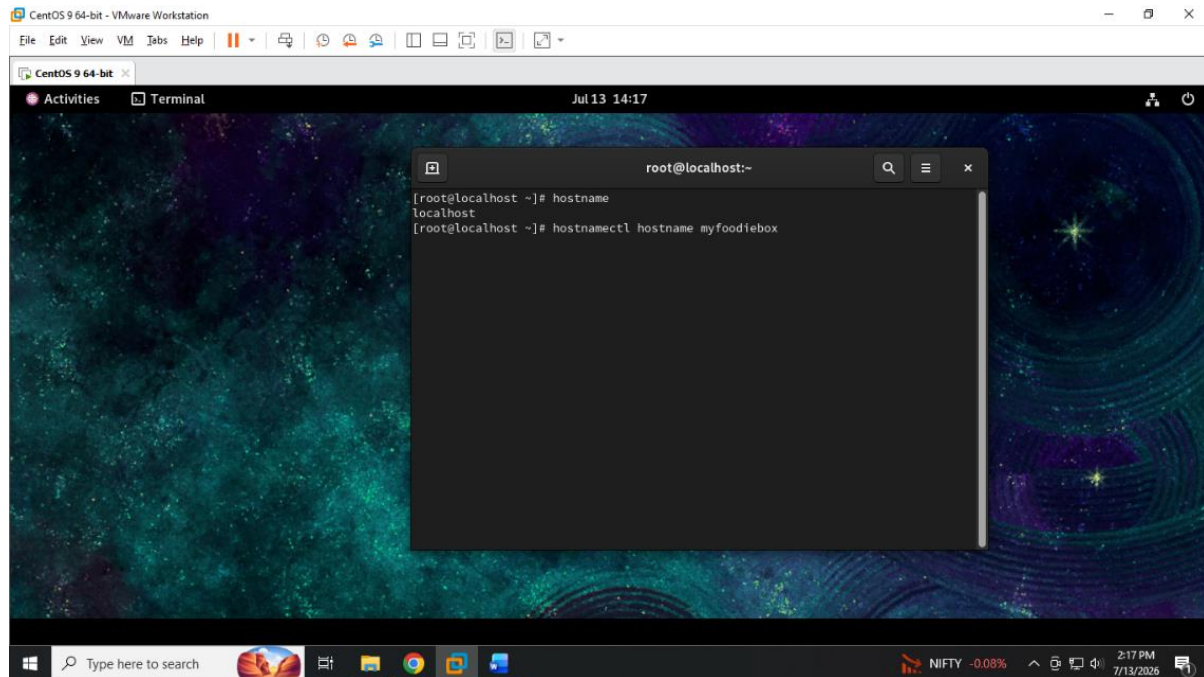


MODULE-3: LINUX INSTALLATION AND SYSTEM CONFIGURATIONS AND USER&GROUP MANAGEMENT

GUIDED BY : VIPUL MISTRI

Q.3 Configure a static IP address for your VM's network interface (e.g., enp0s3 or eth0) so that it always gets the same IP on reboot. Hint: Edit /etc/netplan/*.yaml (Ubuntu) or /etc/sysconfig/network-scripts/ifcfg-eth0 (CentOS), then restart networking.

ANS :

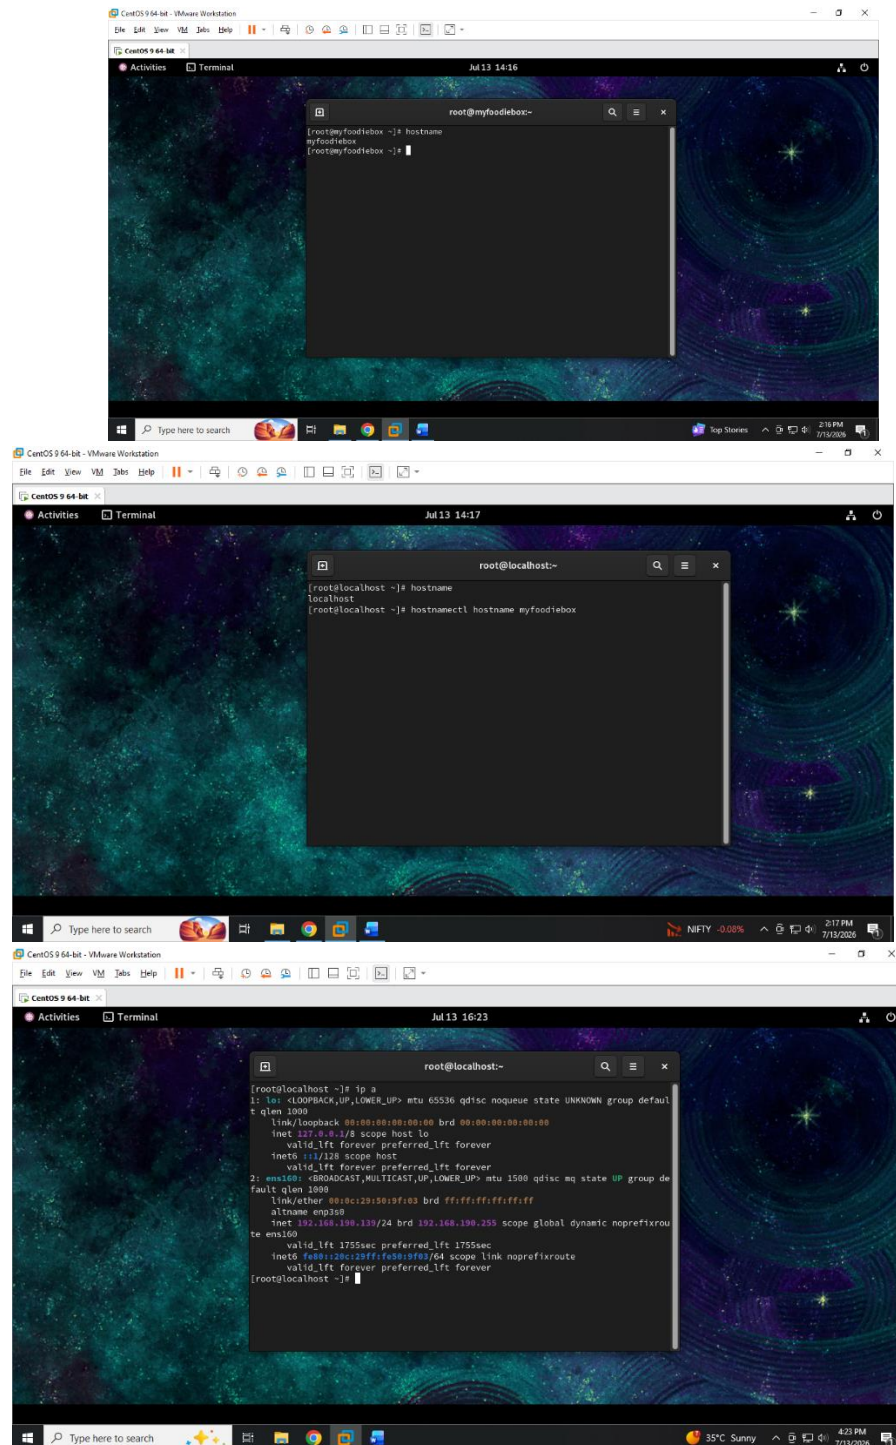

MODULE-3: LINUX INSTALLATION AND SYSTEM CONFIGURATIONS AND USER&GROUP MANAGEMENT

GUIDED BY : VIPUL MISTRI

Q.4 Enable SSH access on your Linux VM and connect to it from your host machine using an SSH client (like PuTTY or ssh command). Show the output of whoami after login.

ANS :

The image shows two terminal windows. The top window is a CentOS 9 64-bit VM terminal. The bottom window is a host machine terminal (MobaXterm) connected to the VM via SSH.

CentOS 9 64-bit - VMware Workstation Terminal:

```
root@localhost:~# grep -E "PermitRootLogin|PasswordAuthentication" /etc/ssh/sshd_config
#PermitRootLogin yes
#PasswordAuthentication yes
# PasswordAuthentication, depending on your PAM configuration,
# the setting of "PermitRootLogin prohibit-password".
# PAM authentication, then enable this but set PasswordAuthentication
[root@localhost ~]# vim /etc/ssh/sshd_config
moduli          sshd_config.d/          ssh_host_ed25519_key.pub
ssh_config       ssh_host_ecdsa_key      ssh_host_rsa_key
ssh_config.d/    ssh_host_ecdsa_key.pub  ssh_host_rsa_key.pub
ssh_config       ssh_host_ed25519_key
[root@localhost ~]# vim /etc/ssh/sshd_config
[root@localhost ~]# vi /etc/ssh/sshd_config
[root@localhost ~]# vim /etc/ssh/sshd_config
[root@localhost ~]# systemctl restart ssh
Failed to restart ssh.service: Unit ssh.service not found.
[root@localhost ~]# systemctl restart sshd
[root@localhost ~]#
```

Host Machine Terminal (MobaXterm):

```
192.168.190.139
Terminal Sessions View X server Tools Games Settings Macros Help
Session Servers Tools Games Sessions View Split MultiExec Tunneling Packages Settings Help

Quick connect...
192.168.190.139
Name
  Name
  ..
  .cache
  .config
  .local
  .mozilla
  .ssh
  backup_playlist
  Desktop
  Downloads
  linux
  Music
  music_playlist
  Pictures
  Public
  Templates
  Videos
  .bash_history
  .bash_logout
  .bash_profile
  .bashrc
  .cshrc
  .lesshst
  .tcshrc
  .viminfo
  Remote monitoring
  Follow terminal folder

MobaXterm Personal Edition v24.1
(SSH client, X server and network tools)

SSH session to root@192.168.190.139
  Direct SSH : ✓
  SSH compression : ✓
  SSH-browser : ✓
  X11-forwarding : ✓ (remote display is forwarded through SSH)
  For more info, ctrl+click on help or visit our website.

Activate the web console with: systemctl enable --now cockpit.socket


Last failed login: Mon Jul 13 17:02:45 IST 2026 from 192.168.190.1 on ssh:notty
There were 9 failed login attempts since the last successful login.
Last login: Mon Jul 13 16:34:47 2026
[root@localhost ~]# whoami
root
[root@localhost ~]#
```

MODULE-3: LINUX INSTALLATION AND SYSTEM CONFIGURATIONS AND USER&GROUP MANAGEMENT

GUIDED BY : VIPUL MISTRI

Q.5 Create a new user named 'zomatouser' and add them to a new group called 'foodies'. Set their password and verify group membership using the groups command.

ANS :

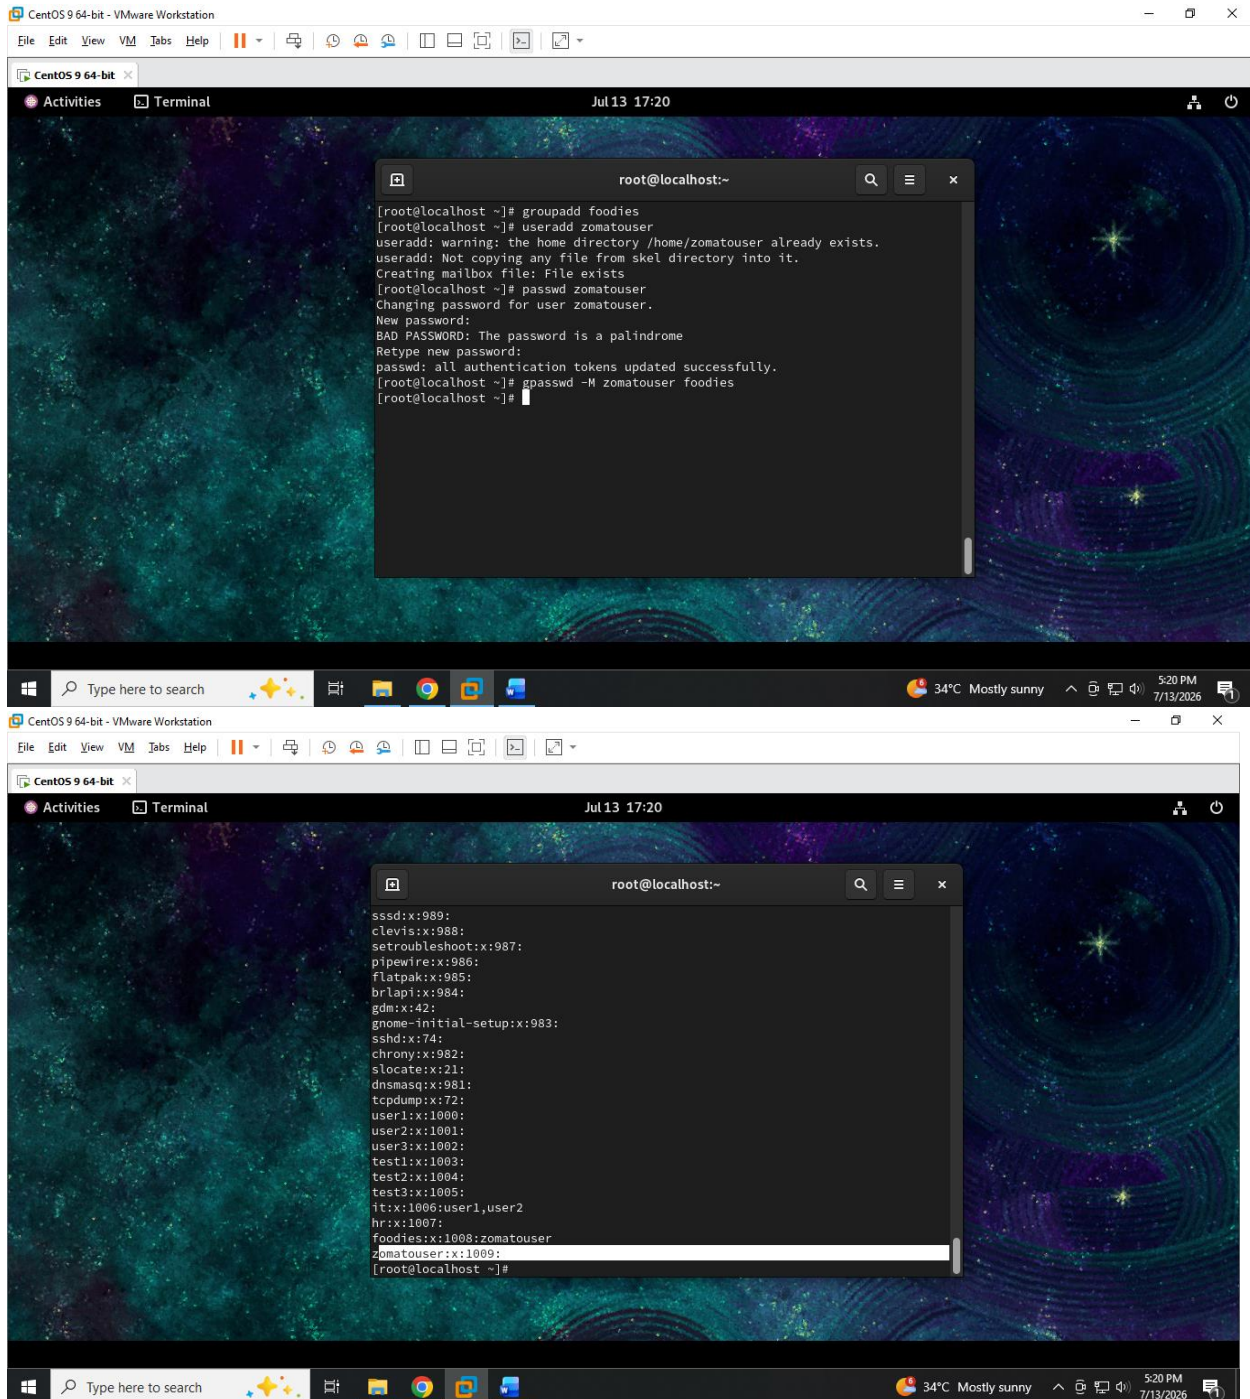

The image consists of two screenshots of a Linux terminal window running on a CentOS 9 64-bit VM. The terminal shows the following commands and output:

```
root@localhost:~# groupadd foodies
root@localhost:~# useradd zomatouser
useradd: warning: the home directory /home/zomatouser already exists.
useradd: Not copying any file from skel directory into it.
Creating mailbox file: File exists
root@localhost:~# passwd zomatouser
Changing password for user zomatouser.
New password:
BAD PASSWORD: The password is a palindrome
Retype new password:
passwd: all authentication tokens updated successfully.
root@localhost:~# gpasswd -M zomatouser foodies
root@localhost:~#
```

The second screenshot shows the output of the `groups` command, which lists the groups for the user `zomatouser`:

```
sssd:x:989:
clevis:x:988:
setroubleshoot:x:987:
pipewire:x:986:
flatpak:x:985:
brlapi:x:984:
gdm:x:42:
gnome-initial-setup:x:983:
sshd:x:74:
chrony:x:982:
slocate:x:21:
dnsmasq:x:981:
tcpdump:x:72:
user1:x:1000:
user2:x:1001:
user3:x:1002:
test1:x:1003:
test2:x:1004:
test3:x:1005:
it:x:1006:user1,user2
hr:x:1007:
foodies:x:1008:zomatouser
zomatouser:x:1009:
root@localhost:~#
```