

Cucumber Report

Mar 18, 2025, 11:54:19 AM

Start : Mar 18, 11:53:26.638 AM

End : Mar 18, 11:54:18.058 AM

Duration : 51.420 s

Features

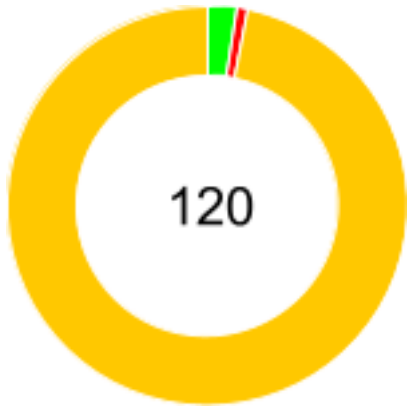
Scenarios

Steps

PASSED - 0
FAILED - 1
SKIPPED - 0

PASSED - 0
FAILED - 6
SKIPPED - 0

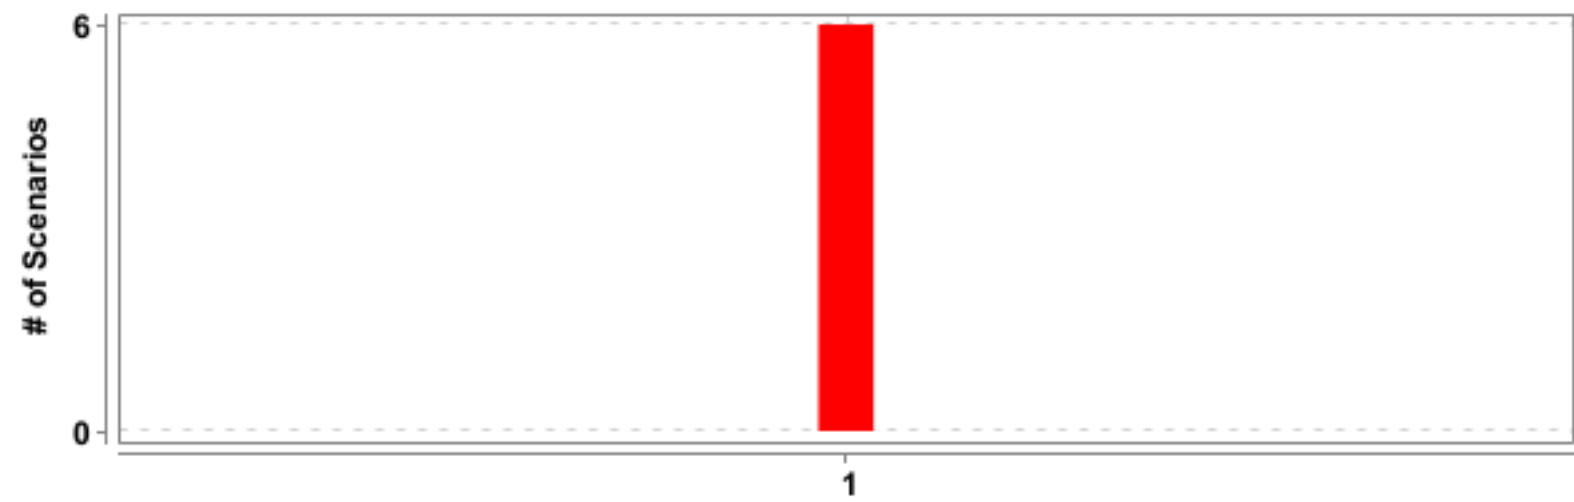
PASSED - 3
FAILED - 1
SKIPPED - 116



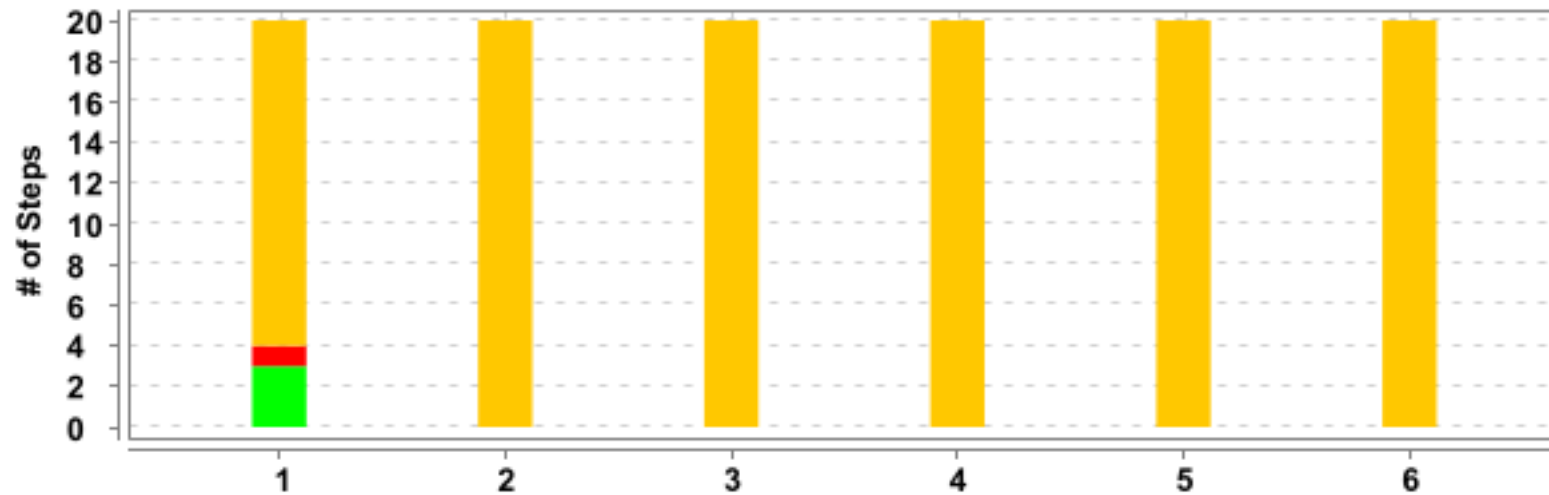
Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Registration_Mandatory_Field_Test_cases</u>	51.420 s	6	0	6	0	120	3	1	116

#	Feature Name	Scenario Name
1	<u>Registration_Mandatory_Field_Test_cases</u>	<u>03_Validate User registers for an account</u>
2		<u>03_Validate User registers for an account</u>
3		<u>03_Validate User registers for an account</u>
4		<u>03_Validate User registers for an account</u>
5		<u>03_Validate User registers for an account</u>
6		<u>03_Validate User registers for an account</u>

TAG	Scenario				Feature			
Name	T	P	F	S	T	P	F	S
@Validate_User_registers_for_an_account	6	0	6	0	1	0	1	0
@Registration	6	0	6	0	1	0	1	0
@Tc_03	6	0	6	0	1	0	1	0





#	Feature Name	T	P	F	S	Duration
1	<u>Registration_Mandatory_Field_Test_cases</u>	6	0	6	0	51.420 s

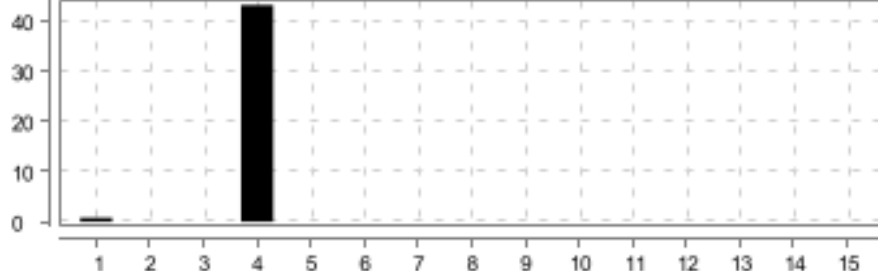




#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Registration_Mandatory_Field_Test_cases</u>	<u>03_Validate User registers for an account</u>	20	3	1	16	50.956 s
2		<u>03_Validate User registers for an account</u>	20	0	0	20	0.077 s
3		<u>03_Validate User registers for an account</u>	20	0	0	20	0.070 s
4		<u>03_Validate User registers for an account</u>	20	0	0	20	0.065 s
5		<u>03_Validate User registers for an account</u>	20	0	0	20	0.048 s
6		<u>03_Validate User registers for an account</u>	20	0	0	20	0.059 s



Registration_Mandatory_Field_Test_cases

FAILED	DURATION - 51.420 s	Scenarios Total - 6 Pass - 0 Fail - 6 Skip - 0		Steps Total - 120 Pass - 3 Fail - 1 Skip - 116	
/ 11:53:26.638 AM // 11:54:18.058 AM /					

03_V_validate User registers for an account

FAILED	DURATION - 50.956 s		Steps Total - 20 Pass - 3 Fail - 1 Skip - 16	
/ 11:53:26.666 AM // 11:54:17.622 AM /				
Registration_Mandatory_Field_Test_cases				
@Validate_User_registers_for_an_account @Registration @Tc_03				

#	Step / Hook Details	Status	Duration
1	Given Navigate to the registration page .	PASSED	0.759 s
	AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario)	PASSED	0.465 s
	image 		
2	Then I enter an "teamaqa35@gmail.com" address and verify proper email format validation	PASSED	0.016 s
	AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario)	PASSED	0.368 s
	image		

#	Step / Hook Details	Status	Duration
			
3	And I enter a valid password that adheres to policy requirements	PASSED	0.009 s
	AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario) image 	PASSED	0.343 s
4	And The "teamA1234@" and "teamA1234@" fields match <pre>org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.10' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [d091f311aa2c0a60e79c4cf1b0999724, findElement [using, value]] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 134.0.6998.89, chrome: {chromedriverVersion: 134.0.6998.88 (7e3d5c978c6d..., userDataDir: C:\Users\syfur\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:56198}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:56198/devtoo..., se:cdpVersion: 134.0.6998.89, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: d091f311aa2c0a60e79c4cf1b0999724 at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:355) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:349) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) at jdk.proxy2/jdk.proxy2.\$Proxy46.click(Unknown Source) at com.pdl.pages.Registration_Quafox.password_and_confirm_password_matches(Registration_Quafox.java:274) at com.pdl.step_definitions.AA_Registration_02_Step_Definition.the_and_fields_match(AA_Registration_02_Step_Definition.java:39) at ?.The "teamA1234@" and "teamA1234@" fields match(file:///C:/EAL_iNTERNSHIP_Repo/PDLConnect_Automation_Testing/src/test/ resources/features/1_REGISTRATION/Registration_Mandatory_Field_02.feature:12) Caused by: java.io.UncheckedIOException: java.net.SocketException: Connection reset at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73)</pre>	FAILED	43.183 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:48) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:96) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:188) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:355) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:349) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) at jdk.proxy2/jdk.proxy2.\$Proxy46.click(Unknown Source) at com.pdl.pages.Registration_Quafox.password_and_confirm_password_matches(Registration_Quafox.java:274) at com.pdl.step_definitions.AA_Registration_02_Step_Definition.the_and_fields_match(AA_Registration_02_Step_Definition.java:39) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invoke(Invoker.java:24) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238)		

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:757) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.net.SocketException: Connection reset at java.base/sun.nio.ch.SocketChannelImpl.throwConnectionReset(SocketChannelImpl.java:394) at java.base/sun.nio.ch.SocketChannelImpl.read(SocketChannelImpl.java:426) at io.netty.buffer.PooledByteBuf.setBytes(PooledByteBuf.java:256) at io.netty.buffer.AbstractByteBuf.writeBytes(AbstractByteBuf.java:1132) at io.netty.channel.socket.nio.NioSocketChannel.doReadBytes(NioSocketChannel.java:357) at io.netty.channel.nio.AbstractNioByteChannel\$NioByteUnsafe.read(AbstractNioByteChannel.java:151) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:788) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840) </pre> <p>* Not displayable characters are replaced by '?'. </p>		
	AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario)	FAILED	0.012 s

#	Step / Hook Details	Status	Duration
	<p>org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.10' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [d091f311aa2c0a60e79c4cf1b0999724, deleteAllCookies []] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 134.0.6998.89, chrome: {chromedriverVersion: 134.0.6998.88 (7e3d5c978c6d..., userDataDir: C:\Users\syfur\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:56198}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:56198/devtoo..., se:cdpVersion: 134.0.6998.89, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: d091f311aa2c0a60e79c4cf1b0999724</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.takeScreenshot(Hooks.java:107)</p> <p>Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:33467</p> <p>at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:48) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:96) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:188) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.takeScreenshot(Hooks.java:107) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invokeStatic(Invoker.java:80) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:45) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21)</p>		

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:56) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:757) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:33467 at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179) at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108) </pre>		

#	Step / Hook Details	Status	Duration
	<pre> at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20) at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:590) at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:583) at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:559) at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:492) at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:636) at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:629) at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:118) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840) </pre> <p>Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:33467 Caused by: java.net.ConnectException: Connection refused: no further information</p> <pre> at java.base/sun.nio.ch.Net.pollConnect(Native Method) at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840) </pre>		
5	When I insert invalid data inputs	SKIPPED	0.002 s
6	Then The system rejects the invalid inputs	SKIPPED	0.001 s
7	When I insert a duplicate email address	SKIPPED	0.001 s
8	Then The system does not accept duplicate email addresses	SKIPPED	0.001 s
9	When I complete the form with valid details	SKIPPED	0.002 s

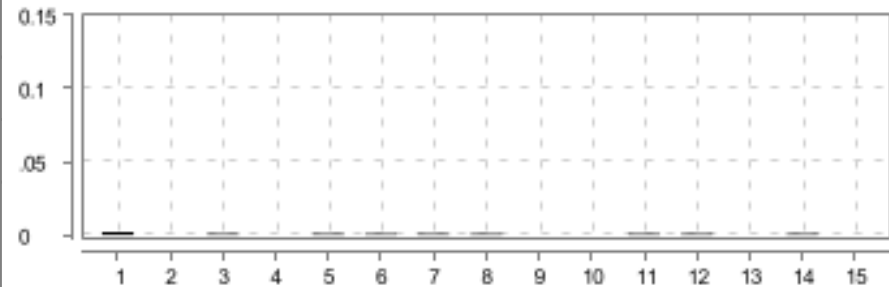

#	Step / Hook Details	Status	Duration
10	When I enter the correct "123456"	SKIPPED	0.001 s
11	Then "<Registration status>" is successful	SKIPPED	0.001 s
12	When I enter an incorrect OTP	SKIPPED	0.001 s
13	Then An error message is displayed	SKIPPED	0.001 s
14	And The OTP expires after a set time	SKIPPED	0.002 s
15	When I request to resend the OTP	SKIPPED	0.000 s
16	Then The OTP is resent successfully	SKIPPED	0.001 s
17	When Registration is successful	SKIPPED	0.000 s
18	Then The user is redirected to the homepage	SKIPPED	0.001 s
19	When Registration is unsuccessful	SKIPPED	0.000 s
20	Then The user is unable to access restricted pages without logging in	SKIPPED	0.001 s
	AFTER - com.pdl.hooks.Hooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.010 s
	<p>org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.10' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [d091f311aa2c0a60e79c4cf1b0999724, deleteAllCookies []] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 134.0.6998.89, chrome: {chromedriverVersion: 134.0.6998.88 (7e3d5c978c6d..., userDataDir: C:\Users\syfur\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:56198}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:56198/devtoo..., se:cdpVersion: 134.0.6998.89, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: d091f311aa2c0a60e79c4cf1b0999724</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.tearDown(Hooks.java:129)</p> <p>Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:33467</p> <p>at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:48) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:96) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:188) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518)</p>		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.tearDown(Hooks.java:129) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invoke(Invoker.java:24) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:90) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229)		

#	Step / Hook Details	Status	Duration
	<p>at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145)</p> <p>at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226)</p> <p>at org.junit.runners.ParentRunner.run(ParentRunner.java:309)</p> <p>at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93)</p> <p>at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:757)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)</p> <p>Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:1]:33467</p> <p>at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179)</p> <p>at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108)</p> <p>at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28)</p> <p>at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20)</p> <p>at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:590)</p> <p>at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:583)</p> <p>at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:559)</p> <p>at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:492)</p> <p>at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:636)</p> <p>at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:629)</p> <p>at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:118)</p> <p>at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321)</p> <p>at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650)</p> <p>at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562)</p> <p>at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997)</p> <p>at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74)</p> <p>at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30)</p> <p>at java.base/java.lang.Thread.run(Thread.java:840)</p> <p>Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:1]:33467</p> <p>Caused by: java.net.ConnectException: Connection refused: no further information</p> <p>at java.base/sun.nio.ch.Net.pollConnect(Native Method)</p> <p>at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672)</p> <p>at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946)</p> <p>at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337)</p> <p>at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776)</p>		

#	Step / Hook Details	Status	Duration
	at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840)		

03_Validate User registers for an account

<div>FAILED</div> <div>DURATION - 0.077 s</div>			<div>Steps</div> <div>Total - 20</div> <div>Pass - 0</div> <div>Fail - 0</div> <div>Skip - 20</div>	
/ 11:54:17.662 AM // 11:54:17.739 AM /				
Registration_Mandatory_Field_Test_cases				
@Validate_User_registers_for_an_account @Registration @Tc_03				

#	Step / Hook Details	Status	Duration
	BEFORE - com.pdl.hooks.Hooks.scenarioName(io.cucumber.java.Scenario) io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)	FAILED	0.009 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:757) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) </pre> <p>Caused by: java.lang.reflect.InvocationTargetException</p> <pre> at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more </pre> <p>Caused by: org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.10' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [d091f311aa2c0a60e79c4cf1b0999724, deleteAllCookies] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 134.0.6998.89, chrome: {chromedriverVersion: 134.0.6998.88 (7e3d5c978c6d..., userDataDir: C:\Users\syfur\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:56198}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:56198/devtoo..., se:cdpVersion: 134.0.6998.89, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators:</p>		

#	Step / Hook Details	Status	Duration
	<pre> true} Session ID: d091f311aa2c0a60e79c4cf1b0999724 at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:42) ... 48 more Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/ [0:0:0:0:0:0:1]:33467 at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:48) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:96) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:188) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) ... 53 more Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:33467 at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179) at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20) at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:590) at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:583) at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:559) at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:492) at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:636) at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:629) at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:118) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840) Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/ </pre>		

#	Step / Hook Details	Status	Duration
	[0:0:0:0:0:0:1]:33467 Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.Net.pollConnect(Native Method) at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840)		
	BEFORE - com.pdl.hooks.Hooks.setUp() io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309)	FAILED	0.009 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:757) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more Caused by: org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java. version: '17.0.10' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [d091f311aa2c0a60e79c4cf1b0999724, deleteAllCookies []] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 134.0.6998.89, chrome: {chromedriverVersion: 134.0.6998.88 (7e3d5c978c6d..., userDataDir: C:\Users\syfur\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:56198}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:56198/devtoo..., se:cdpVersion: 134.0.6998.89, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: d091f311aa2c0a60e79c4cf1b0999724 at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:42) </pre>		

#	Step / Hook Details	Status	Duration
	<p>... 48 more Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:33467</p> <p>at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73)</p> <p>at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42)</p> <p>at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55)</p> <p>at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:48)</p> <p>at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:96)</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:188)</p> <p>at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196)</p> <p>at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518)</p> <p>... 53 more Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:33467</p> <p>at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179)</p> <p>at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108)</p> <p>at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28)</p> <p>at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20)</p> <p>at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:590)</p> <p>at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:583)</p> <p>at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:559)</p> <p>at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:492)</p> <p>at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:636)</p> <p>at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:629)</p> <p>at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:118)</p> <p>at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321)</p> <p>at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650)</p> <p>at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562)</p> <p>at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997)</p> <p>at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74)</p> <p>at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30)</p> <p>at java.base/java.lang.Thread.run(Thread.java:840)</p> <p>Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:33467</p> <p>Caused by: java.net.ConnectException: Connection refused: no further information</p> <p>at java.base/sun.nio.ch.Net.pollConnect(Native Method)</p> <p>at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672)</p> <p>at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946)</p> <p>at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337)</p> <p>at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776)</p>		

#	Step / Hook Details	Status	Duration
	at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840)		
1	Given Navigate to the registration page .	SKIPPED	0.002 s
2	Then I enter an "user2@test.com" address and verify proper email format validation	SKIPPED	0.000 s
3	And I enter a valid password that adheres to policy requirements	SKIPPED	0.001 s
4	And The "WeakPass" and "WeakPass" fields match	SKIPPED	0.000 s
5	When I insert invalid data inputs	SKIPPED	0.001 s
6	Then The system rejects the invalid inputs	SKIPPED	0.001 s
7	When I insert a duplicate email address	SKIPPED	0.001 s
8	Then The system does not accept duplicate email addresses	SKIPPED	0.001 s
9	When I complete the form with valid details	SKIPPED	0.000 s
10	When I enter the correct "123456"	SKIPPED	0.000 s
11	Then "<Registration status>" is successful	SKIPPED	0.001 s
12	When I enter an incorrect OTP	SKIPPED	0.001 s
13	Then An error message is displayed	SKIPPED	0.000 s
14	And The OTP expires after a set time	SKIPPED	0.001 s
15	When I request to resend the OTP	SKIPPED	0.000 s
16	Then The OTP is resent successfully	SKIPPED	0.001 s
17	When Registration is successful	SKIPPED	0.000 s
18	Then The user is redirected to the homepage	SKIPPED	0.001 s
19	When Registration is unsuccessful	SKIPPED	0.002 s
20	Then The user is unable to access restricted pages without logging in	SKIPPED	0.001 s
	AFTER - com.pdl.hooks.Hooks.before(io.cucumber.java.Scenario)	FAILED	0.010 s
	io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21)		

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:90) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:757) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) </pre>		

#	Step / Hook Details	Status	Duration
	<pre> at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more Caused by: org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java. version: '17.0.10' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [d091f311aa2c0a60e79c4cf1b0999724, deleteAllCookies []] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 134.0.6998.89, chrome: {chromedriverVersion: 134.0.6998.88 (7e3d5c978c6d..., userDataDir: C:\Users\syfur\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:56198}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:56198/devtoo..., se:cdpVersion: 134.0.6998.89, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: d091f311aa2c0a60e79c4cf1b0999724 at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:42) ... 48 more Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/ [0:0:0:0:0:0:1]:33467 at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:48) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:96) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:188) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) ... 53 more Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:33467 at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179) at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20) at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:590) at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:583) at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:559) at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:492) at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:636) at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:629) at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:118) </pre>		

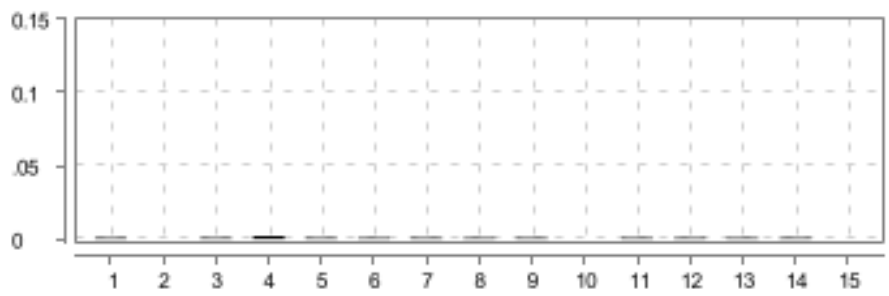

#	Step / Hook Details	Status	Duration
	<p>at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840)</p> <p>Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:0:1]:33467 Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.Net.pollConnect(Native Method) at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840)</p>		
	<p>AFTER - com.pdl.hooks.Hooks.tearDown(io.cucumber.java.Scenario)</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:90) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136)</p>	FAILED	0.008 s

#	Step / Hook Details	Status	Duration
	<p>at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136)</p> <p>at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)</p> <p>at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238)</p> <p>at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63)</p> <p>at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236)</p> <p>at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53)</p> <p>at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229)</p> <p>at org.junit.runners.ParentRunner.run(ParentRunner.java:309)</p> <p>at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)</p> <p>at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p> <p>at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89)</p> <p>at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238)</p> <p>at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63)</p> <p>at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236)</p> <p>at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53)</p> <p>at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145)</p> <p>at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226)</p> <p>at org.junit.runners.ParentRunner.run(ParentRunner.java:309)</p> <p>at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93)</p> <p>at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:757)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)</p> <p>Caused by: java.lang.reflect.InvocationTargetException</p> <p>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)</p> <p>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)</p> <p>at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)</p> <p>at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)</p> <p>at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)</p> <p>at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53)</p> <p>... 42 more</p> <p>Caused by: org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.10' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [d091f311aa2c0a60e79c4cf1b0999724, deleteAllCookies]</p> <p>Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 134.0.6998.89, chrome: {chromedriverVersion:</p>		

#	Step / Hook Details	Status	Duration
	<p>134.0.6998.88 (7e3d5c978c6d..., userDataDir: C:\Users\syfur\AppData\Loca..., fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:56198}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:56198/devtoo..., se:cdpVersion: 134.0.6998.89, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: d091f311aa2c0a60e79c4cf1b0999724</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:42) ... 48 more Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:33467 at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:48) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:96) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:188) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) ... 53 more Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:33467 at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179) at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20) at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:590) at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:583) at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:559) at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:492) at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:636) at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:629) at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:118) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562)</p>		

#	Step / Hook Details	Status	Duration
	<pre> at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840) Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:0:1]:33467 Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.Net.pollConnect(Native Method) at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840) </pre>		

03_Validate User registers for an account

FAILED	DURATION - 0.070 s		Steps Total - 20 Pass - 0 Fail - 0 Skip - 20	
/ 11:54:17.760 AM // 11:54:17.830 AM /				
Registration_Mandatory_Field_Test_cases				
@Validate_User_registers_for_an_account @Registration @Tc_03				

#	Step / Hook Details	Status	Duration
	<p>BEFORE - com.pdl.hooks.Hooks.scenarioName(io.cucumber.java.Scenario)</p> <pre> io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) </pre>	FAILED	0.009 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:757) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) </pre>		

#	Step / Hook Details	Status	Duration
	<p>at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more Caused by: org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.10' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [d091f311aa2c0a60e79c4cf1b0999724, deleteAllCookies []] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 134.0.6998.89, chrome: {chromedriverVersion: 134.0.6998.88 (7e3d5c978c6d..., userDataDir: C:\Users\syfur\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:56198}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:56198/devtoo..., se:cdpVersion: 134.0.6998.89, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: d091f311aa2c0a60e79c4cf1b0999724</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:42) ... 48 more Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:33467</p> <p>at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:48) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:96) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:188) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) ... 53 more Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:33467</p> <p>at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179) at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20) at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:590) at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:583) at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:559) at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:492) at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:636) at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:629)</p>		

#	Step / Hook Details	Status	Duration
	<p>at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:118)</p> <p>at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321)</p> <p>at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650)</p> <p>at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562)</p> <p>at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997)</p> <p>at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74)</p> <p>at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30)</p> <p>at java.base/java.lang.Thread.run(Thread.java:840)</p> <p>Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:0:1]:33467</p> <p>Caused by: java.net.ConnectException: Connection refused: no further information</p> <p>at java.base/sun.nio.ch.Net.pollConnect(Native Method)</p> <p>at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672)</p> <p>at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946)</p> <p>at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337)</p> <p>at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650)</p> <p>at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562)</p> <p>at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997)</p> <p>at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74)</p> <p>at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30)</p> <p>at java.base/java.lang.Thread.run(Thread.java:840)</p>		
	<p>BEFORE - com.pdl.hooks.Hooks.setUp()</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks</p> <p>at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67)</p> <p>at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45)</p> <p>at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)</p> <p>at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64)</p> <p>at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46)</p> <p>at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21)</p> <p>at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)</p> <p>at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81)</p> <p>at io.cucumber.core.runner.TestStep.run(TestStep.java:53)</p> <p>at io.cucumber.core.runner.TestCase.run(TestCase.java:78)</p> <p>at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)</p> <p>at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)</p>	FAILED	0.010 s

#	Step / Hook Details	Status	Duration
	<p>at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136)</p> <p>at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136)</p> <p>at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)</p> <p>at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238)</p> <p>at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63)</p> <p>at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236)</p> <p>at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53)</p> <p>at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229)</p> <p>at org.junit.runners.ParentRunner.run(ParentRunner.java:309)</p> <p>at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)</p> <p>at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p> <p>at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89)</p> <p>at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238)</p> <p>at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63)</p> <p>at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236)</p> <p>at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53)</p> <p>at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145)</p> <p>at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226)</p> <p>at org.junit.runners.ParentRunner.run(ParentRunner.java:309)</p> <p>at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93)</p> <p>at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:757)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)</p> <p>Caused by: java.lang.reflect.InvocationTargetException</p> <p>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)</p> <p>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)</p> <p>at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)</p> <p>at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)</p> <p>at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)</p> <p>at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53)</p> <p>... 42 more</p> <p>Caused by: org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.10' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [d091f311aa2c0a60e79c4cf1b0999724, deleteAllCookies</p>		

#	Step / Hook Details	Status	Duration
	<p> [[Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 134.0.6998.89, chrome: {chromedriverVersion: 134.0.6998.88 (7e3d5c978c6d..., userDataDir: C:\Users\syfur\AppData\Loca..., fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:56198}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:56198/devtoo..., se:cdpVersion: 134.0.6998.89, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: d091f311aa2c0a60e79c4cf1b0999724 </p> <p> at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:42) ... 48 more Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:33467 at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:48) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:96) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:188) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) ... 53 more Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:33467 at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179) at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20) at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:590) at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:583) at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:559) at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:492) at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:636) at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:629) at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:118) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) </p>		

#	Step / Hook Details	Status	Duration
	at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840) Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:0:1]:33467 Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.Net.pollConnect(Native Method) at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840)		
1	Given Navigate to the registration page .	SKIPPED	0.001 s
2	Then I enter an "user3@test.com" address and verify proper email format validation	SKIPPED	0.000 s
3	And I enter a valid password that adheres to policy requirements	SKIPPED	0.001 s
4	And The "Strong@123" and "WrongPass" fields match	SKIPPED	0.002 s
5	When I insert invalid data inputs	SKIPPED	0.001 s
6	Then The system rejects the invalid inputs	SKIPPED	0.001 s
7	When I insert a duplicate email address	SKIPPED	0.001 s
8	Then The system does not accept duplicate email addresses	SKIPPED	0.001 s
9	When I complete the form with valid details	SKIPPED	0.001 s
10	When I enter the correct "123456"	SKIPPED	0.000 s
11	Then "<Registration status>" is successful	SKIPPED	0.001 s
12	When I enter an incorrect OTP	SKIPPED	0.001 s
13	Then An error message is displayed	SKIPPED	0.001 s
14	And The OTP expires after a set time	SKIPPED	0.001 s
15	When I request to resend the OTP	SKIPPED	0.000 s
16	Then The OTP is resent successfully	SKIPPED	0.000 s
17	When Registration is successful	SKIPPED	0.001 s

#	Step / Hook Details	Status	Duration
18	Then The user is redirected to the homepage	SKIPPED	0.001 s
19	When Registration is unsuccessful	SKIPPED	0.001 s
20	Then The user is unable to access restricted pages without logging in	SKIPPED	0.001 s
	AFTER - com.pdl.hooks.Hooks.before(io.cucumber.java.Scenario)	FAILED	0.008 s
	<p>io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks</p> <p>at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67)</p> <p>at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45)</p> <p>at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)</p> <p>at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64)</p> <p>at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46)</p> <p>at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21)</p> <p>at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)</p> <p>at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81)</p> <p>at io.cucumber.core.runner.TestStep.run(TestStep.java:53)</p> <p>at io.cucumber.core.runner.TestCase.run(TestCase.java:90)</p> <p>at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)</p> <p>at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136)</p> <p>at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136)</p> <p>at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)</p> <p>at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238)</p> <p>at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63)</p> <p>at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236)</p> <p>at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53)</p> <p>at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229)</p> <p>at org.junit.runners.ParentRunner.run(ParentRunner.java:309)</p> <p>at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)</p> <p>at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p> <p>at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89)</p> <p>at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238)</p> <p>at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63)</p> <p>at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236)</p> <p>at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53)</p> <p>at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145)</p>		

#	Step / Hook Details	Status	Duration
	<p>at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:757) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more Caused by: org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.10' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [d091f311aa2c0a60e79c4cf1b0999724, deleteAllCookies []] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 134.0.6998.89, chrome: {chromedriverVersion: 134.0.6998.88 (7e3d5c978c6d..., userDataDir: C:\Users\syfur\AppData\Loca...}, fedcm:accounts: true, goog.chromeOptions: {debuggerAddress: localhost:56198}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:56198/devtoo..., se:cdpVersion: 134.0.6998.89, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: d091f311aa2c0a60e79c4cf1b0999724 at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:42) ... 48 more Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:33467 at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:48) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:96) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:188) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518)</p>		

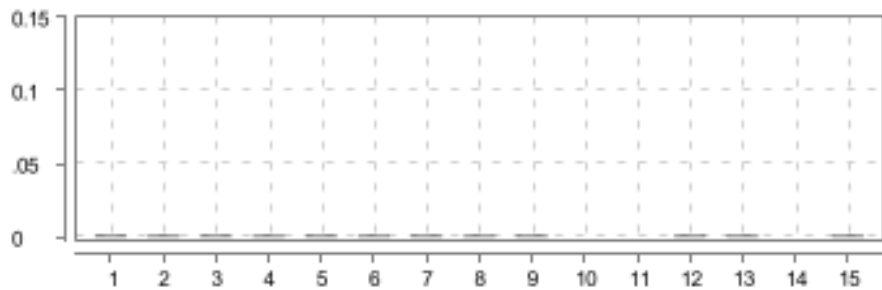

#	Step / Hook Details	Status	Duration
	<p>... 53 more Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:33467 at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179) at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20) at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:590) at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:583) at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:559) at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:492) at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:636) at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:629) at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:118) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840)</p> <p>Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:33467 Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.Net.pollConnect(Native Method) at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840)</p>		
	AFTER - com.pdl.hooks.Hooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.008 s
	<p>io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67)</p>		

#	Step / Hook Details	Status	Duration
	at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:90) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:757) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452)		

#	Step / Hook Details	Status	Duration
	<p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more Caused by: org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.10' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [d091f311aa2c0a60e79c4cf1b0999724, deleteAllCookies []] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 134.0.6998.89, chrome: {chromedriverVersion: 134.0.6998.88 (7e3d5c978c6d..., userDataDir: C:\Users\syfur\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:56198}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:56198/devtoo..., se:cdpVersion: 134.0.6998.89, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: d091f311aa2c0a60e79c4cf1b0999724 at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:42) ... 48 more Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:33467 at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:48) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:96) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:188) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) ... 53 more Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:33467 at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179) at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20) at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:590) at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:583)</p>		

#	Step / Hook Details	Status	Duration
	<p>at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:559)</p> <p>at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:492)</p> <p>at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:636)</p> <p>at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:629)</p> <p>at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:118)</p> <p>at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321)</p> <p>at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650)</p> <p>at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562)</p> <p>at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997)</p> <p>at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74)</p> <p>at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30)</p> <p>at java.base/java.lang.Thread.run(Thread.java:840)</p> <p>Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:33467</p> <p>Caused by: java.net.ConnectException: Connection refused: no further information</p> <p>at java.base/sun.nio.ch.Net.pollConnect(Native Method)</p> <p>at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672)</p> <p>at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946)</p> <p>at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337)</p> <p>at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650)</p> <p>at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562)</p> <p>at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997)</p> <p>at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74)</p> <p>at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30)</p> <p>at java.base/java.lang.Thread.run(Thread.java:840)</p>		

03_Validate User registers for an account

FAILED	DURATION - 0.065 s		<div>Steps</div> <div>Total - 20</div> <div>Pass - 0</div> <div>Fail - 0</div> <div>Skip - 20</div>	
/ 11:54:17.854 AM // 11:54:17.919 AM /				
Registration_Mandatory_Field_Test_cases				
@Validate_User_registers_for_an_account @Registration @Tc_03				

#	Step / Hook Details	Status	Duration
	BEFORE - com.pdl.hooks.Hooks.scenarioName(io.cucumber.java.Scenario) io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238)	FAILED	0.009 s

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:757) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more Caused by: org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java. version: '17.0.10' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [d091f311aa2c0a60e79c4cf1b0999724, deleteAllCookies []] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 134.0.6998.89, chrome: {chromedriverVersion: 134.0.6998.88 (7e3d5c978c6d..., userDataDir: C:\Users\syfur\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:56198}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:56198/devtoo..., se:cdpVersion: 134.0.6998.89, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: d091f311aa2c0a60e79c4cf1b0999724 at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:42) ... 48 more Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/ [0:0:0:0:0:0:1]:33467 at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) </pre>		

#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:48) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:96) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:188) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) ... 53 more Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:33467 at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179) at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20) at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:590) at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:583) at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:559) at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:492) at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:636) at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:629) at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:118) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840) Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:33467 Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.Net.pollConnect(Native Method) at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) </pre>		

#	Step / Hook Details	Status	Duration
	at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840)		
	BEFORE - com.pdl.hooks.Hooks.setUp() io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145)	FAILED	0.008 s

#	Step / Hook Details	Status	Duration
	<p>at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:757) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more Caused by: org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.10' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [d091f311aa2c0a60e79c4cf1b0999724, deleteAllCookies []] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 134.0.6998.89, chrome: {chromedriverVersion: 134.0.6998.88 (7e3d5c978c6d..., userDataDir: C:\Users\syfur\AppData\Loca...}, fedcm:accounts: true, goog.chromeOptions: {debuggerAddress: localhost:56198}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:56198/devtoo..., se:cdpVersion: 134.0.6998.89, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: d091f311aa2c0a60e79c4cf1b0999724 at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:42) ... 48 more Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:33467 at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:48) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:96) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:188) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518)</p>		

#	Step / Hook Details	Status	Duration
	<p>... 53 more Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:33467 at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179) at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20) at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:590) at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:583) at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:559) at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:492) at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:636) at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:629) at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:118) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840)</p> <p>Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:33467 Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.Net.pollConnect(Native Method) at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840)</p>		
1	Given Navigate to the registration page .	SKIPPED	0.001 s
2	Then I enter an "existing@test.com" address and verify proper email format validation	SKIPPED	0.001 s
3	And I enter a valid password that adheres to policy requirements	SKIPPED	0.001 s

#	Step / Hook Details	Status	Duration
4	And The "Strong@123" and "Strong@123" fields match	SKIPPED	0.001 s
5	When I insert invalid data inputs	SKIPPED	0.001 s
6	Then The system rejects the invalid inputs	SKIPPED	0.001 s
7	When I insert a duplicate email address	SKIPPED	0.001 s
8	Then The system does not accept duplicate email addresses	SKIPPED	0.001 s
9	When I complete the form with valid details	SKIPPED	0.001 s
10	When I enter the correct "123456"	SKIPPED	0.000 s
11	Then "<Registration status>" is successful	SKIPPED	0.000 s
12	When I enter an incorrect OTP	SKIPPED	0.001 s
13	Then An error message is displayed	SKIPPED	0.001 s
14	And The OTP expires after a set time	SKIPPED	0.000 s
15	When I request to resend the OTP	SKIPPED	0.001 s
16	Then The OTP is resent successfully	SKIPPED	0.001 s
17	When Registration is successful	SKIPPED	0.002 s
18	Then The user is redirected to the homepage	SKIPPED	0.000 s
19	When Registration is unsuccessful	SKIPPED	0.000 s
20	Then The user is unable to access restricted pages without logging in	SKIPPED	0.000 s
	AFTER - com.pdl.hooks.Hooks.before(io.cucumber.java.Scenario)	FAILED	0.006 s
	io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:90) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)		

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:757) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) </pre> <p>Caused by: java.lang.reflect.InvocationTargetException</p> <pre> at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more </pre> <p>Caused by: org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.10' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [d091f311aa2c0a60e79c4cf1b0999724, deleteAllCookies] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 134.0.6998.89, chrome: {chromedriverVersion: 134.0.6998.88 (7e3d5c978c6d..., userDataDir: C:\Users\syfur\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:56198}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:56198/devtoo..., se:cdpVersion: 134.0.6998.89, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators:</p>		

#	Step / Hook Details	Status	Duration
	<pre> true} Session ID: d091f311aa2c0a60e79c4cf1b0999724 at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:42) ... 48 more Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/ [0:0:0:0:0:0:1]:33467 at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:48) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:96) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:188) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) ... 53 more Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:33467 at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179) at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20) at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:590) at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:583) at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:559) at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:492) at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:636) at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:629) at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:118) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840) Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/ </pre>		

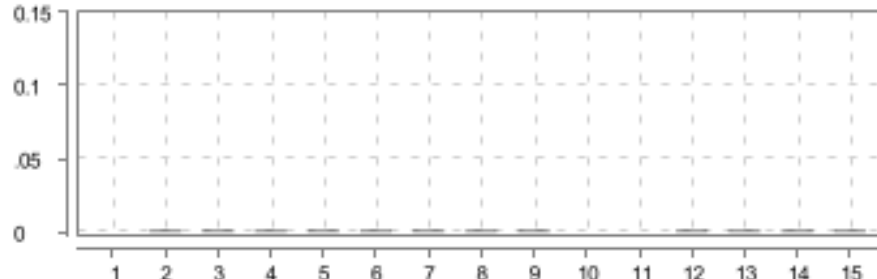

#	Step / Hook Details	Status	Duration
	[0:0:0:0:0:0:1]:33467 Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.Net.pollConnect(Native Method) at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840)		
	AFTER - com.pdl.hooks.Hooks.tearDown(io.cucumber.java.Scenario) io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:90) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309)	FAILED	0.006 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:757) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more Caused by: org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java. version: '17.0.10' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [d091f311aa2c0a60e79c4cf1b0999724, deleteAllCookies [] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 134.0.6998.89, chrome: {chromedriverVersion: 134.0.6998.88 (7e3d5c978c6d..., userDataDir: C:\Users\syfur\AppData\Loca..., fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:56198}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:56198/devtoo..., se:cdpVersion: 134.0.6998.89, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: d091f311aa2c0a60e79c4cf1b0999724 at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:42) </pre>		

#	Step / Hook Details	Status	Duration
	<p>... 48 more Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:0:1]:33467</p> <p>at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73)</p> <p>at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42)</p> <p>at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55)</p> <p>at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:48)</p> <p>at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:96)</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:188)</p> <p>at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196)</p> <p>at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518)</p> <p>... 53 more Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:0:1]:33467</p> <p>at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179)</p> <p>at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108)</p> <p>at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28)</p> <p>at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20)</p> <p>at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:590)</p> <p>at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:583)</p> <p>at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:559)</p> <p>at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:492)</p> <p>at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:636)</p> <p>at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:629)</p> <p>at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:118)</p> <p>at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321)</p> <p>at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650)</p> <p>at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562)</p> <p>at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997)</p> <p>at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74)</p> <p>at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30)</p> <p>at java.base/java.lang.Thread.run(Thread.java:840)</p> <p>Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:0:1]:33467 Caused by: java.net.ConnectException: Connection refused: no further information</p> <p>at java.base/sun.nio.ch.Net.pollConnect(Native Method)</p> <p>at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672)</p> <p>at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946)</p> <p>at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337)</p> <p>at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776)</p>		

#	Step / Hook Details	Status	Duration
	at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840)		

03_Validate User registers for an account

<div>FAILED</div> <div>DURATION - 0.048 s</div>			<div>Steps</div> <div>Total - 20</div> <div>Pass - 0</div> <div>Fail - 0</div> <div>Skip - 20</div>	
/ 11:54:17.935 AM // 11:54:17.983 AM /				
Registration_Mandatory_Field_Test_cases				
@Validate_User_registers_for_an_account @Registration @Tc_03				

#	Step / Hook Details	Status	Duration
	BEFORE - com.pdl.hooks.Hooks.scenarioName(io.cucumber.java.Scenario) io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)	FAILED	0.006 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:757) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) </pre> <p>Caused by: java.lang.reflect.InvocationTargetException</p> <pre> at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more </pre> <p>Caused by: org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.10' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [d091f311aa2c0a60e79c4cf1b0999724, deleteAllCookies] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 134.0.6998.89, chrome: {chromedriverVersion: 134.0.6998.88 (7e3d5c978c6d..., userDataDir: C:\Users\syfur\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:56198}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:56198/devtoo..., se:cdpVersion: 134.0.6998.89, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators:</p>		

#	Step / Hook Details	Status	Duration
	<pre> true} Session ID: d091f311aa2c0a60e79c4cf1b0999724 at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:42) ... 48 more Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/ [0:0:0:0:0:0:1]:33467 at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:48) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:96) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:188) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) ... 53 more Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:33467 at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179) at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20) at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:590) at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:583) at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:559) at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:492) at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:636) at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:629) at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:118) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840) Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/ </pre>		

#	Step / Hook Details	Status	Duration
	[0:0:0:0:0:0:1]:33467 Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.Net.pollConnect(Native Method) at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840)		
	BEFORE - com.pdl.hooks.Hooks.setUp() io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309)	FAILED	0.007 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:757) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more Caused by: org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java. version: '17.0.10' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [d091f311aa2c0a60e79c4cf1b0999724, deleteAllCookies [] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 134.0.6998.89, chrome: {chromedriverVersion: 134.0.6998.88 (7e3d5c978c6d..., userDataDir: C:\Users\syfur\AppData\Loca..., fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:56198}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:56198/devtoo..., se:cdpVersion: 134.0.6998.89, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: d091f311aa2c0a60e79c4cf1b0999724 at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:42) </pre>		

#	Step / Hook Details	Status	Duration
	<p>... 48 more Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:33467</p> <p>at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73)</p> <p>at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42)</p> <p>at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55)</p> <p>at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:48)</p> <p>at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:96)</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:188)</p> <p>at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196)</p> <p>at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518)</p> <p>... 53 more Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:33467</p> <p>at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179)</p> <p>at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108)</p> <p>at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28)</p> <p>at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20)</p> <p>at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:590)</p> <p>at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:583)</p> <p>at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:559)</p> <p>at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:492)</p> <p>at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:636)</p> <p>at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:629)</p> <p>at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:118)</p> <p>at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321)</p> <p>at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650)</p> <p>at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562)</p> <p>at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997)</p> <p>at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74)</p> <p>at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30)</p> <p>at java.base/java.lang.Thread.run(Thread.java:840)</p> <p>Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:33467</p> <p>Caused by: java.net.ConnectException: Connection refused: no further information</p> <p>at java.base/sun.nio.ch.Net.pollConnect(Native Method)</p> <p>at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672)</p> <p>at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946)</p> <p>at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337)</p> <p>at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776)</p>		

#	Step / Hook Details	Status	Duration
	at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840)		
1	Given Navigate to the registration page .	SKIPPED	0.000 s
2	Then I enter an "user5@test.com" address and verify proper email format validation	SKIPPED	0.001 s
3	And I enter a valid password that adheres to policy requirements	SKIPPED	0.001 s
4	And The "Strong@123" and "Strong@123" fields match	SKIPPED	0.001 s
5	When I insert invalid data inputs	SKIPPED	0.001 s
6	Then The system rejects the invalid inputs	SKIPPED	0.001 s
7	When I insert a duplicate email address	SKIPPED	0.001 s
8	Then The system does not accept duplicate email addresses	SKIPPED	0.001 s
9	When I complete the form with valid details	SKIPPED	0.001 s
10	When I enter the correct "000000"	SKIPPED	0.000 s
11	Then "<Registration status>" is successful	SKIPPED	0.000 s
12	When I enter an incorrect OTP	SKIPPED	0.001 s
13	Then An error message is displayed	SKIPPED	0.001 s
14	And The OTP expires after a set time	SKIPPED	0.001 s
15	When I request to resend the OTP	SKIPPED	0.001 s
16	Then The OTP is resent successfully	SKIPPED	0.000 s
17	When Registration is successful	SKIPPED	0.000 s
18	Then The user is redirected to the homepage	SKIPPED	0.000 s
19	When Registration is unsuccessful	SKIPPED	0.001 s
20	Then The user is unable to access restricted pages without logging in	SKIPPED	0.000 s
	AFTER - com.pdl.hooks.Hooks.before(io.cucumber.java.Scenario)	FAILED	0.007 s
	io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21)		

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:90) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:757) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) </pre>		

#	Step / Hook Details	Status	Duration
	<p>at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more Caused by: org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.10' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [d091f311aa2c0a60e79c4cf1b0999724, deleteAllCookies []] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 134.0.6998.89, chrome: {chromedriverVersion: 134.0.6998.88 (7e3d5c978c6d..., userDataDir: C:\Users\syfur\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:56198}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:56198/devtoo..., se:cdpVersion: 134.0.6998.89, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: d091f311aa2c0a60e79c4cf1b0999724</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:42) ... 48 more Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:33467</p> <p>at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:48) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:96) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:188) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) ... 53 more Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:33467</p> <p>at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179) at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20) at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:590) at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:583) at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:559) at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:492) at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:636) at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:629) at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:118)</p>		

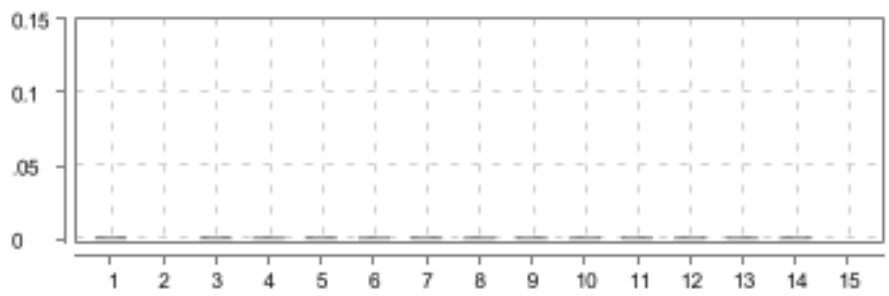

#	Step / Hook Details	Status	Duration
	<pre> at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840) Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/ [0:0:0:0:0:0:1]:33467 Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.Net.pollConnect(Native Method) at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840) </pre>		
	AFTER - com.pdl.hooks.Hooks.tearDown(io.cucumber.java.Scenario) <pre> io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:90) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) </pre>	FAILED	0.005 s

#	Step / Hook Details	Status	Duration
	<p>at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136)</p> <p>at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)</p> <p>at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238)</p> <p>at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63)</p> <p>at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236)</p> <p>at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53)</p> <p>at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229)</p> <p>at org.junit.runners.ParentRunner.run(ParentRunner.java:309)</p> <p>at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)</p> <p>at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p> <p>at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89)</p> <p>at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238)</p> <p>at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63)</p> <p>at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236)</p> <p>at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53)</p> <p>at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145)</p> <p>at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226)</p> <p>at org.junit.runners.ParentRunner.run(ParentRunner.java:309)</p> <p>at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93)</p> <p>at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:757)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)</p> <p>Caused by: java.lang.reflect.InvocationTargetException</p> <p>at jdk.internal.reflect.GeneratedConstructorAccessor26.newInstance(Unknown Source)</p> <p>at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)</p> <p>at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)</p> <p>at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)</p> <p>at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53)</p> <p>... 42 more</p> <p>Caused by: org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.10' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [d091f311aa2c0a60e79c4cf1b0999724, deleteAllCookies]</p> <p>Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 134.0.6998.89, chrome: {chromedriverVersion: 134.0.6998.88 (7e3d5c978c6d..., userDataDir: C:\Users\syfur\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions:</p>		

#	Step / Hook Details	Status	Duration
	<pre> {debuggerAddress: localhost:56198}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:56198/devtoo..., se:cdpVersion: 134.0.6998.89, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: d091f311aa2c0a60e79c4cf1b0999724 at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:42) ... 47 more Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/ [0:0:0:0:0:0:1]:33467 at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:48) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:96) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:188) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) ... 52 more Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:33467 at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179) at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20) at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:590) at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:583) at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:559) at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:492) at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:636) at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:629) at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:118) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) </pre>		

#	Step / Hook Details	Status	Duration
	<pre> at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840) Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/ [0:0:0:0:0:0:1]:33467 Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.Net.pollConnect(Native Method) at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840) </pre>		

03_Validate User registers for an account

FAILED	DURATION - 0.059 s		Steps Total - 20 Pass - 0 Fail - 0 Skip - 20	
/ 11:54:17.999 AM // 11:54:18.058 AM /				
Registration_Mandatory_Field_Test_cases				
@Validate_User_registers_for_an_account @Registration @Tc_03				

#	Step / Hook Details	Status	Duration
	<p>BEFORE - com.pdl.hooks.Hooks.scenarioName(io.cucumber.java.Scenario)</p> <pre> io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) </pre>	FAILED	0.005 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:757) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at jdk.internal.reflect.GeneratedConstructorAccessor26.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) </pre>		

#	Step / Hook Details	Status	Duration
	<p>at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)</p> <p>at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53)</p> <p>... 42 more Caused by: org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.10' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [d091f311aa2c0a60e79c4cf1b0999724, deleteAllCookies []] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 134.0.6998.89, chrome: {chromedriverVersion: 134.0.6998.88 (7e3d5c978c6d..., userDataDir: C:\Users\syfur\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:56198}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:56198/devtoo..., se:cdpVersion: 134.0.6998.89, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: d091f311aa2c0a60e79c4cf1b0999724</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800)</p> <p>at com.pdl.utilities.Driver.getDriver(Driver.java:49)</p> <p>at com.pdl.hooks.Hooks.<init>(Hooks.java:42)</p> <p>... 47 more Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:33467</p> <p>at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73)</p> <p>at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42)</p> <p>at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55)</p> <p>at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:48)</p> <p>at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:96)</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:188)</p> <p>at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196)</p> <p>at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518)</p> <p>... 52 more Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:33467</p> <p>at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179)</p> <p>at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108)</p> <p>at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28)</p> <p>at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20)</p> <p>at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:590)</p> <p>at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:583)</p> <p>at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:559)</p> <p>at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:492)</p> <p>at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:636)</p> <p>at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:629)</p> <p>at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:118)</p> <p>at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321)</p>		

#	Step / Hook Details	Status	Duration
	<p>at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840)</p> <p>Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:0:1]:33467 Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.Net.pollConnect(Native Method) at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840)</p>		
	<p>BEFORE - com.pdl.hooks.Hooks.setUp()</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)</p>	FAILED	0.005 s

#	Step / Hook Details	Status	Duration
	<p> at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:757) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at jdk.internal.reflect.GeneratedConstructorAccessor26.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more Caused by: org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.10' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [d091f311aa2c0a60e79c4cf1b0999724, deleteAllCookies] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 134.0.6998.89, chrome: {chromedriverVersion: 134.0.6998.88 (7e3d5c978c6d..., userDataDir: C:\Users\syfur\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:56198}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), </p>		

#	Step / Hook Details	Status	Duration
	<pre> se:cdp: ws://localhost:56198/devtoo..., se:cdpVersion: 134.0.6998.89, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: d091f311aa2c0a60e79c4cf1b0999724 at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:42) ... 47 more Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/ [0:0:0:0:0:0:1]:33467 at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:48) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:96) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:188) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) ... 52 more Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:33467 at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179) at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20) at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:590) at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:583) at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:559) at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:492) at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:636) at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:629) at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:118) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) </pre>		

#	Step / Hook Details	Status	Duration
	at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840) Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:0:1]:33467 Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.Net.pollConnect(Native Method) at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840)		
1	Given Navigate to the registration page .	SKIPPED	0.001 s
2	Then I enter an "user6@test.com" address and verify proper email format validation	SKIPPED	0.000 s
3	And I enter a valid password that adheres to policy requirements	SKIPPED	0.001 s
4	And The "Strong@123" and "Strong@123" fields match	SKIPPED	0.001 s
5	When I insert invalid data inputs	SKIPPED	0.001 s
6	Then The system rejects the invalid inputs	SKIPPED	0.001 s
7	When I insert a duplicate email address	SKIPPED	0.001 s
8	Then The system does not accept duplicate email addresses	SKIPPED	0.001 s
9	When I complete the form with valid details	SKIPPED	0.001 s
10	When I enter the correct "Expired"	SKIPPED	0.001 s
11	Then "<Registration status>" is successful	SKIPPED	0.001 s
12	When I enter an incorrect OTP	SKIPPED	0.001 s
13	Then An error message is displayed	SKIPPED	0.001 s
14	And The OTP expires after a set time	SKIPPED	0.001 s
15	When I request to resend the OTP	SKIPPED	0.000 s
16	Then The OTP is resent successfully	SKIPPED	0.001 s
17	When Registration is successful	SKIPPED	0.001 s
18	Then The user is redirected to the homepage	SKIPPED	0.000 s
19	When Registration is unsuccessful	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
20	Then The user is unable to access restricted pages without logging in	SKIPPED	0.000 s
	AFTER - com.pdl.hooks.Hooks.before(io.cucumber.java.Scenario) io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:90) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309)	FAILED	0.006 s

#	Step / Hook Details	Status	Duration
	<pre> at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:757) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at jdk.internal.reflect.GeneratedConstructorAccessor26.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more Caused by: org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java. version: '17.0.10' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [d091f311aa2c0a60e79c4cf1b0999724, deleteAllCookies []] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 134.0.6998.89, chrome: {chromedriverVersion: 134.0.6998.88 (7e3d5c978c6d..., userDataDir: C:\Users\syfur\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:56198}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:56198/devtoo..., se:cdpVersion: 134.0.6998.89, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: d091f311aa2c0a60e79c4cf1b0999724 at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:42) ... 47 more Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/ [0:0:0:0:0:0:1]:33467 at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:48) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:96) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:188) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) ... 52 more Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:33467 at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179) at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108) </pre>		

#	Step / Hook Details	Status	Duration
	<pre> at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20) at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:590) at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:583) at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:559) at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:492) at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:636) at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:629) at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:118) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840) Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/ [0:0:0:0:0:0:1]:33467 Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.Net.pollConnect(Native Method) at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840) </pre>		
	AFTER - com.pdl.hooks.Hooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.007 s
	<pre> io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) </pre>		

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:90) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:757) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at jdk.internal.reflect.GeneratedConstructorAccessor26.newInstance(Unknown Source) </pre>		

#	Step / Hook Details	Status	Duration
	<pre> at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more Caused by: org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java. version: '17.0.10' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [d091f311aa2c0a60e79c4cf1b0999724, deleteAllCookies []] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 134.0.6998.89, chrome: {chromedriverVersion: 134.0.6998.88 (7e3d5c978c6d..., userDataDir: C:\Users\syfur\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:56198}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:56198/devtoo..., se:cdpVersion: 134.0.6998.89, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: d091f311aa2c0a60e79c4cf1b0999724 at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.<init>(Hooks.java:42) ... 47 more Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/ [0:0:0:0:0:0:1]:33467 at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:48) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:96) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:188) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) ... 52 more Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:33467 at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179) at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20) at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:590) at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:583) at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:559) at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:492) at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:636) at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:629) </pre>		

#	Step / Hook Details	Status	Duration
	<p>at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:118)</p> <p>at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321)</p> <p>at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650)</p> <p>at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562)</p> <p>at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997)</p> <p>at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74)</p> <p>at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30)</p> <p>at java.base/java.lang.Thread.run(Thread.java:840)</p> <p>Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:33467</p> <p>Caused by: java.net.ConnectException: Connection refused: no further information</p> <p>at java.base/sun.nio.ch.Net.pollConnect(Native Method)</p> <p>at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672)</p> <p>at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946)</p> <p>at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337)</p> <p>at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650)</p> <p>at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562)</p> <p>at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997)</p> <p>at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74)</p> <p>at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30)</p> <p>at java.base/java.lang.Thread.run(Thread.java:840)</p>		