Start: Mar 15, 11:07:17.395 PM End: Mar 15, 11:07:41.850 PM **Duration**: 24.455 s Scenarios **Features** Steps PASSED - 0 PASSED - 0 PASSED - 3 SKIPPED - 0 SKIPPED - 0 SKIPPED - 5 9 40 50 60 40 50 60 40 50 60 30 Pass % 70 Pass % 70 30 Pass % 70 20 20 20 80 80 80 90 90 10 33 % 100 100

Feature			Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S	
Registration_Test_cases	24.455 s	1	0	1	0	9	3	1	5	

FAIL & SKIP SCENARIOS -- 3 --

#	Feature Name	Scenario Name
1	Registration_Test_cases	02_validate User fills out mandatory fields incorrectly


TAG		Scer	nario			Fea	ture	
Name	T	P	F	S	T	P	F	S
@Registration	1	0	1	0	1	0	1	0
@Tc_02	1	0	1	0	1	0	1	0
@Validate_User_fills_out_mandatory_fields_incorrectly	1	0	1	0	1	0	1	0

FEATURES SUMMARY -- 5 --



#	Feature Name	T	P	F	S	Duration
1	Registration_Test_cases	1	0	1	0	24.455 s


SCENARIOS SUMMARY -- 6

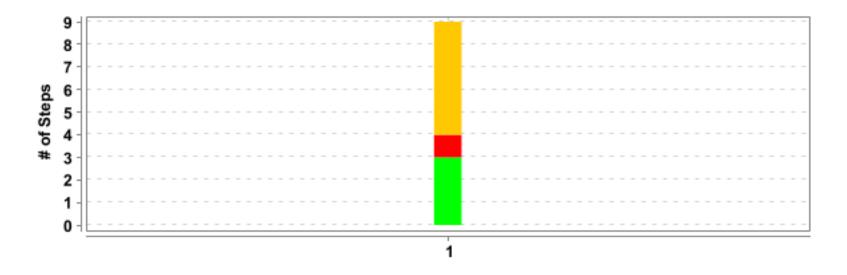


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Registration_Test_cases	02_validate User fills out mandatory fields incorrectly	9	3	1	5	24.441 s

DETAILED SECTION -- 7 --

## **Registration\_Test\_cases**

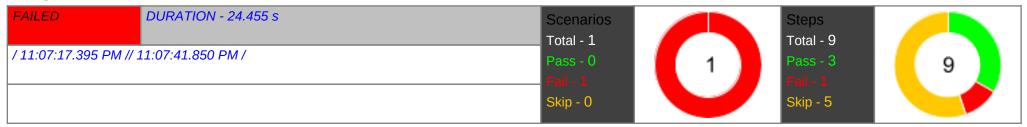

## 02\_validate User fills out mandatory fields incorrectly

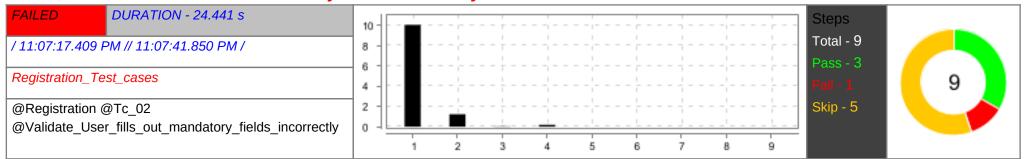

#	Step / Hook Details	Status	Duration
1	Given Navigate to the registration page using the provided URL	PASSED	10.032 s
	AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario)	PASSED	0.460 s
	image	]	
	Quint com   1   1   1   1   1   1   1   1   1		
	Register Account		
	Table   Tabl		
	To 20 10 10 10 10 10 10 10 10 10 10 10 10 10		
	Nacion Section		
2	Then Verify the user link is accessible and clickable.	PASSED	1.226 s
	AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario)	PASSED	0.607 s
	image	1	

#	Step / Hook Details	Status	Duration
	Coffee com  There I		
	When Clicking on the link should redirect the user to the registration web page.	PASSED	0.030 s
	AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario)	PASSED	0.566 s
	image	1	
	Options CCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCC		
	And The web page should display an error message when the user inputs invalid credentials.	FAILED	0.175 s
	org.openqa.selenium.InvalidSelectorException: invalid selector: An invalid or illegal selector was specified (Session info: chrome=133.0.6943.142) For documentation on this error, please visit: https://www.selenium.dev/documentation/webdriver/troubleshooting/errors#invalid-selector-exception Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os. version: '10.0', java.version: '17.0.10' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [74dbf4b8732de5db09fac22d3c161a69, findElement {using=css selector, value=//*[@id="account-register"]/div[1]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 133.0.6943.142, chrome: {chromedriverVersion: 133.0.6943.141 (2a5d6da0d61, userDataDir: C:\Users\syfur\AppData\Loca}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:62494}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:62494/devtoo, se:cdpVersion: 133.0.6943.142, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:virtualAuthenticators:	FAILED	
	true} Session ID: 74dbf4b8732de5db09fac22d3c161a69 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52)		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191)		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:359) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:355) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:349) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) at jdk.proxy2/jdk.proxy2.\$Proxy46.isDisplayed(Unknown Source) at com.pdl.pages.Registration_Quafox.isErrorMessageDisplayed(Registration_Quafox.java:142) at com.pdl.pages.Registration_Quafox.error_message_for_invalid_entry(Registration_Quafox.java:175) at com.pdl.step_definitions.A_Registration_Steps. the_web_page_should_display_an_error_message_when_the_user_inputs_invalid_credentials(A_Registration_Steps.java:90) at ?.The web page should display an error message when the user inputs invalid credentials.(file:///C:/EAL_iNTERNSHIP_Repo/PDLConnect_Automation_Testing/src/test/resources/features/1_REGISTRATION/1_Registration_Mandatory_Field_01.feature:30) * Not displayable characters are replaced by '?'.		
	AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario)	PASSED	0.475 s
	image  Office con The Park To		
5	When Inserting invalid inputs, error messages should be displayed.	SKIPPED	0.004 s
6	When Submitting an empty form should display an error message.	SKIPPED	0.003 s
7	And Entering an invalid email format should display an error message.	SKIPPED	0.003 s
8	And An error message should display when the password does not meet the criteria.	SKIPPED	0.003 s
9	Then The user should receive a confirmation email after successful registration.	SKIPPED	0.003 s