

# Cucumber Report

Mar 18, 2025, 11:40:59 AM

**Start : Mar 18, 11:38:43.291 AM**

**End : Mar 18, 11:40:57.571 AM**

**Duration : 2 m 14.280 s**

Features





PASSED - 0  
FAILED - 1  
SKIPPED - 0

Scenarios

PASSED - 0  
FAILED - 6  
SKIPPED - 0

Steps


PASSED - 15  
FAILED - 5  
SKIPPED - 100

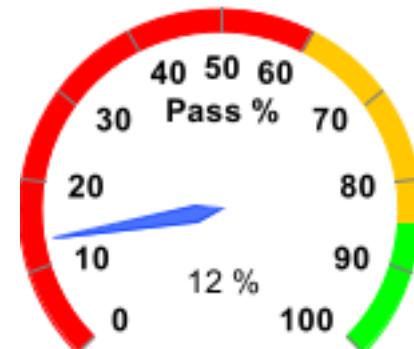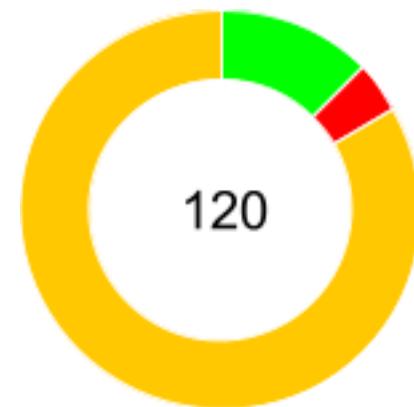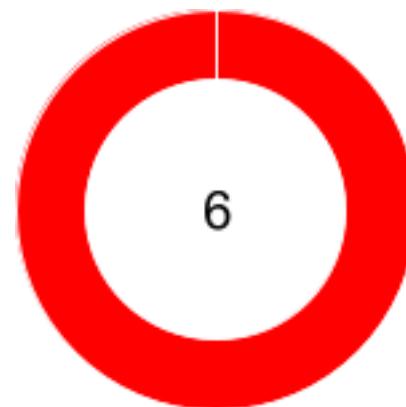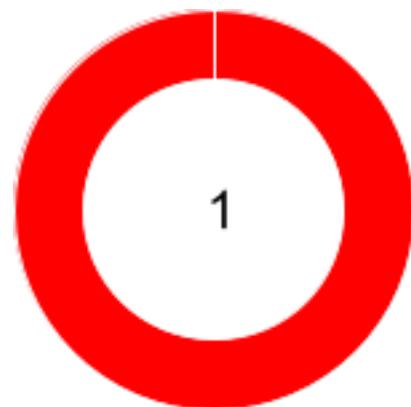


| <b>Feature</b>                                 |  |                 |  | <b>Scenario</b> |          |          |          | <b>Step</b> |          |          |          |
|--|--|-----------------|--|-----------------|----------|----------|----------|-------------|----------|----------|----------|
| <b>Name</b>                                    |  | <b>Duration</b> |  | <b>T</b>        | <b>P</b> | <b>F</b> | <b>S</b> | <b>T</b>    | <b>P</b> | <b>F</b> | <b>S</b> |
| <u>Registration_Mandatory_Field_Test_cases</u> |  | 2 m 14.280 s    |  | 6               | 0        | 6        | 0        | 120         | 15       | 5        | 100      |

| # | Feature Name                                   | Scenario Name                                    |
|---|--|--|
| 1 | <u>Registration_Mandatory_Field_Test_cases</u> | <u>03_Validate User registers for an account</u> |
| 2 |  | <u>03_Validate User registers for an account</u> |
| 3 |  | <u>03_Validate User registers for an account</u> |
| 4 |  | <u>03_Validate User registers for an account</u> |
| 5 |  | <u>03_Validate User registers for an account</u> |
| 6 |  | <u>03_Validate User registers for an account</u> |

| <b>TAG</b>                              | <b>Scenario</b> |          |          |          | <b>Feature</b> |          |          |          |          |
|---|-----------------|----------|----------|----------|----------------|----------|----------|----------|----------|
|   | <b>Name</b>     | <b>T</b> | <b>P</b> | <b>F</b> | <b>S</b>       | <b>T</b> | <b>P</b> | <b>F</b> | <b>S</b> |
| @Validate_User_registers_for_an_account |                 | 6        | 0        | 6        | 0              | 1        | 0        | 1        | 0        |
| @Registration                           |                 | 6        | 0        | 6        | 0              | 1        | 0        | 1        | 0        |
| @Tc_03                                  |                 | 6        | 0        | 6        | 0              | 1        | 0        | 1        | 0        |

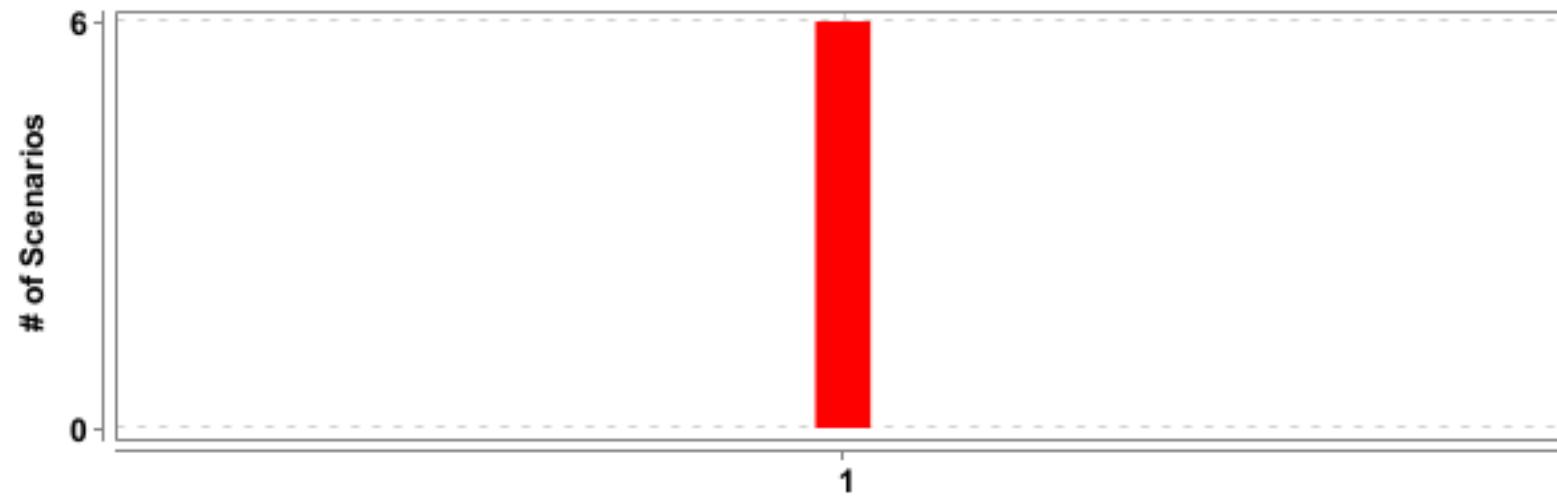


| # | Feature Name                                   | T | P | F | S | Duration     |
|---|--|---|---|---|---|--------------|
| 1 | <u>Registration_Mandatory_Field_Test_cases</u> | 6 | 0 | 6 | 0 | 2 m 14.280 s |

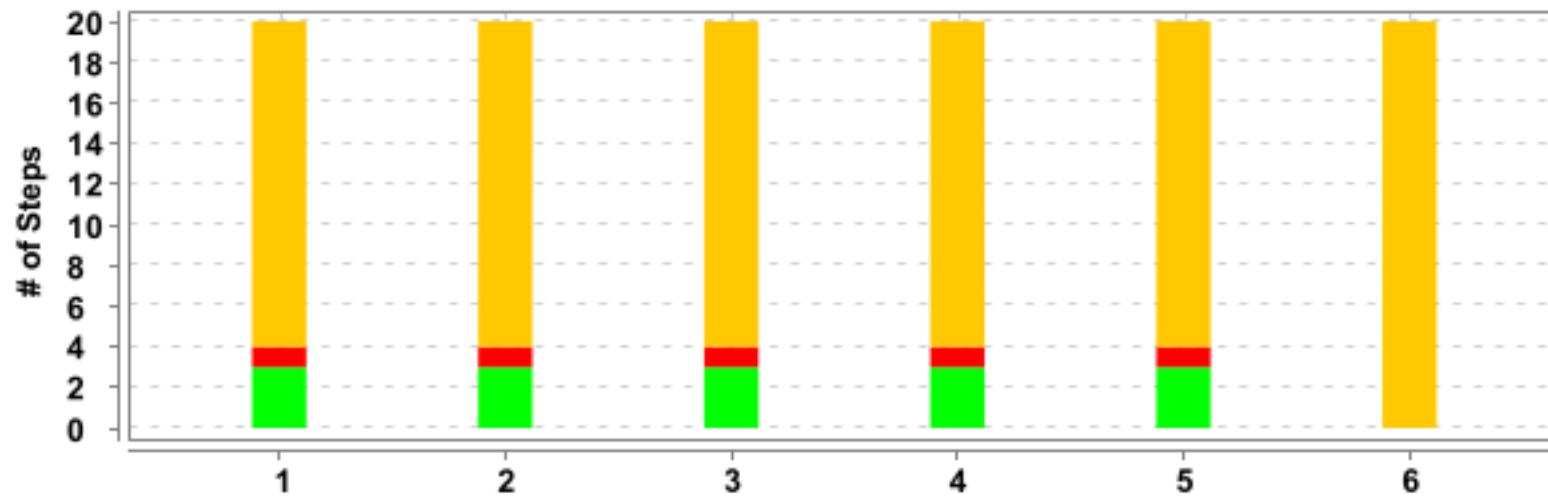


| # | Feature Name                                   | Scenario Name                                    | T  | P | F | S  | Duration |
|---|--|--|----|---|---|----|----------|
| 1 | <u>Registration_Mandatory_Field_Test_cases</u> | <u>03_Validate User registers for an account</u> | 20 | 3 | 1 | 16 | 29.204 s |
| 2 |  | <u>03_Validate User registers for an account</u> | 20 | 3 | 1 | 16 | 25.855 s |
| 3 |  | <u>03_Validate User registers for an account</u> | 20 | 3 | 1 | 16 | 25.974 s |
| 4 |  | <u>03_Validate User registers for an account</u> | 20 | 3 | 1 | 16 | 25.545 s |
| 5 |  | <u>03_Validate User registers for an account</u> | 20 | 3 | 1 | 16 | 27.524 s |
| 6 |  | <u>03_Validate User registers for an account</u> | 20 | 0 | 0 | 20 | 0.072 s  |


## Registration\_Mandatory\_Field\_Test\_cases

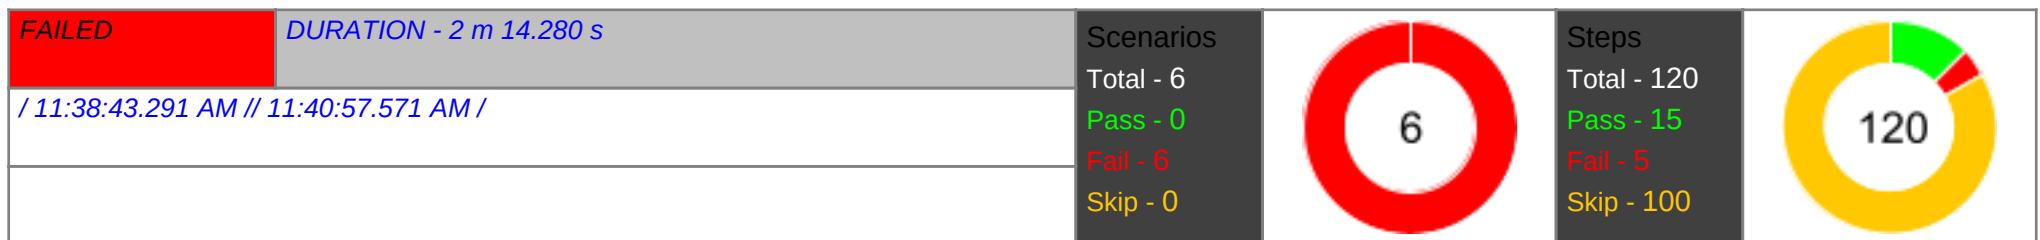

### 03\_Validate User registers for an account

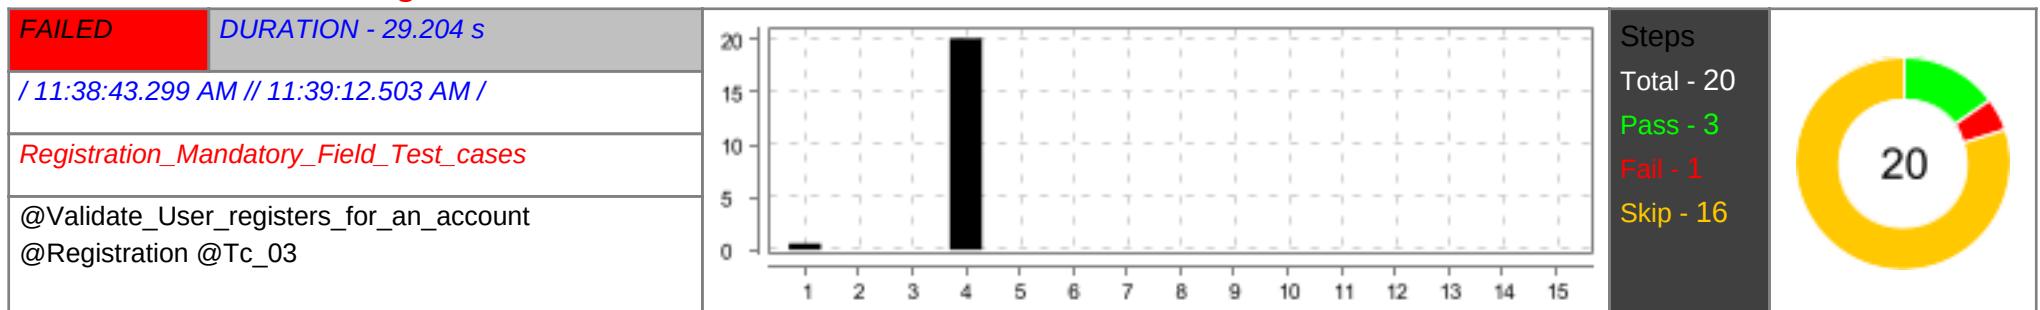


| # | Step / Hook Details  | Status | Duration |
|---|--|--------|----------|
| 1 | Given Navigate to the registration page .<br><br>AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario)<br><br>image<br>   | PASSED | 0.602 s  |
|   |  | PASSED | 0.422 s  |
| 2 | Then I enter an "teamamaqa35@gmail.com" address and verify proper email format validation<br><br>AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario)<br><br>image | PASSED | 0.018 s  |
|   |  | PASSED | 0.371 s  |


| # | Step / Hook Details   | Status | Duration |
|---|---|--------|----------|
|   |    |        |          |
| 3 | And I enter a valid password that adheres to policy requirements  | PASSED | 0.010 s  |
|   | AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario)<br><br>   | PASSED | 0.414 s  |
| 4 | And The "teamA1234@" and "teamA1234@" fields match<br><br>org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"xpath","selector":"/html/body/div[2]/div/div/form/fieldset[2]/div[1]/div/input"} (Session info: chrome=134.0.6998.89) For documentation on this error, please visit: https://www.selenium.dev/documentation/webdriver/troubleshooting/errors#no-such-element-exception Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.10' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [522b4dd62e31c6f82b4083e1664399c1, findElement {using>xpath, value=/html/body/div[2]/div/div/form/fieldset[2]/div[1]/div/input}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 134.0.6998.89, chrome: {chromedriverVersion: 134.0.6998.88 (7e3d5c978c6d..., userDataDir: C:\Users\syfur\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:54837}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:54837/devtoo..., se:cdpVersion: 134.0.6998.89, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 522b4dd62e31c6f82b4083e1664399c1<br><br>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)<br>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)<br>at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)<br>at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)<br>at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)<br>at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)<br>at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)<br>at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52)<br>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191)<br>at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196)<br>at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171)<br>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) | FAILED | 20.116 s |

| #  | Step / Hook Details  | Status  | Duration |
|----|--|---------|----------|
|    | <pre> at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:355) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:349) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) at jdk.proxy2/jdk.proxy2.\$Proxy46.click(Unknown Source) at com.pdl.pages.Registration_Quafox.password_and_confirm_password_matches(Registration_Quafox.java:268) at com.pdl.step_definitions.AA_Registration_02_Step_Definition.the_and_fields_match(AA_Registration_02_Step_Definition.java:36) at ?.The "teamA1234@" and "teamA1234@" fields match(file:///C:/EAL_iINTERNSHIP_Repo/PDLConnect_Automation_Testing/src/test/resources/features/1_REGISTRATION/Registration_Mandatory_Field_02.feature:12) * Not displayable characters are replaced by '?'. </pre> |         |          |
|    | AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario)<br>  | PASSED  | 1.225 s  |
| 5  | When I insert invalid data inputs  | SKIPPED | 0.002 s  |
| 6  | Then The system rejects the invalid inputs   | SKIPPED | 0.001 s  |
| 7  | When I insert a duplicate email address  | SKIPPED | 0.001 s  |
| 8  | Then The system does not accept duplicate email addresses  | SKIPPED | 0.001 s  |
| 9  | When I complete the form with valid details  | SKIPPED | 0.001 s  |
| 10 | When I enter the correct "123456"  | SKIPPED | 0.002 s  |
| 11 | Then "<Registration status>" is successful   | SKIPPED | 0.002 s  |
| 12 | When I enter an incorrect OTP  | SKIPPED | 0.001 s  |
| 13 | Then An error message is displayed   | SKIPPED | 0.001 s  |
| 14 | And The OTP expires after a set time   | SKIPPED | 0.003 s  |
| 15 | When I request to resend the OTP   | SKIPPED | 0.002 s  |
| 16 | Then The OTP is resent successfully  | SKIPPED | 0.001 s  |
| 17 | When Registration is successful  | SKIPPED | 0.001 s  |
| 18 | Then The user is redirected to the homepage  | SKIPPED | 0.001 s  |
| 19 | When Registration is unsuccessful  | SKIPPED | 0.001 s  |
| 20 | Then The user is unable to access restricted pages without logging in  | SKIPPED | 0.001 s  |

### 03\_Validate User registers for an account

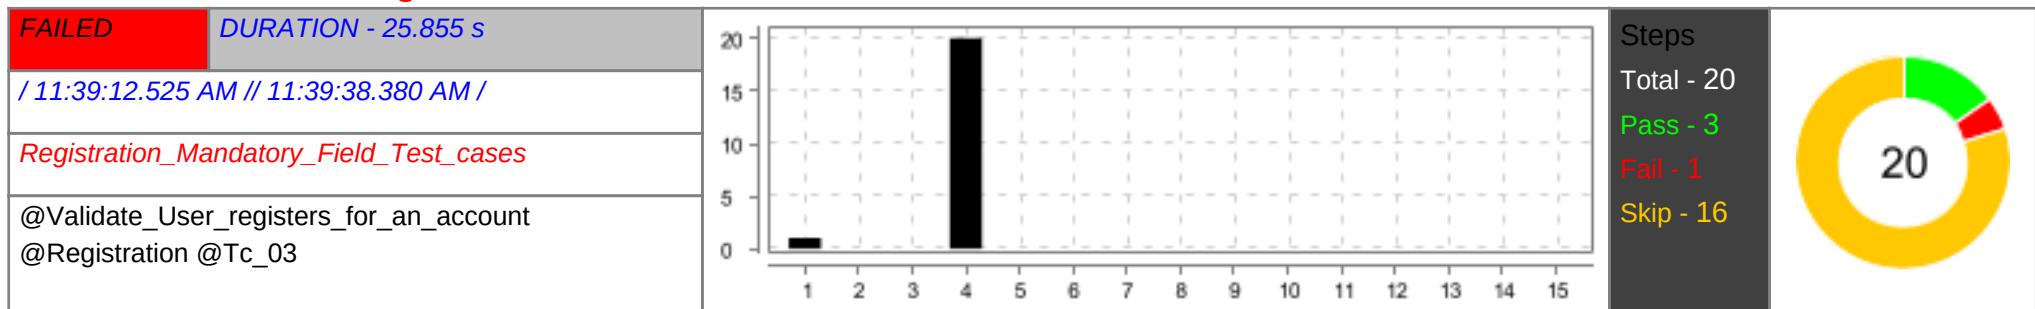


| # | Step / Hook Details   | Status | Duration |
|---|---|--------|----------|
| 1 | Given Navigate to the registration page .<br><br>AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario)<br><br>image<br>  | PASSED | 1.041 s  |
| 2 | Then I enter an "user2@test.com" address and verify proper email format validation<br><br>AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario)<br><br>image<br> | PASSED | 0.019 s  |
| 3 | And I enter a valid password that adheres to policy requirements<br><br>AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario)<br><br>image<br>                   | PASSED | 0.019 s  |
|   |   | PASSED | 1.050 s  |

| # | Step / Hook Details  | Status | Duration |
|---|--|--------|----------|
|   |   |        |          |
| 4 | <p>And The "WeakPass" and "WeakPass" fields match</p> <pre>org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"xpath","selector":"/html/body/div[2]/div/div/form/fieldset[2]/div[1]/div/input"} (Session info: chrome=134.0.6998.89) For documentation on this error, please visit: https://www.selenium.dev/documentation/webdriver/troubleshooting/errors#no-such-element-exception Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.10' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [522b4dd62e31c6f82b4083e1664399c1, findElement {using&gt;xpath, value=/html/body/div[2]/div/div/form/fieldset[2]/div[1]/div/input}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 134.0.6998.89, chrome: {chromedriverVersion: 134.0.6998.88 (7e3d5c978c6d..., userDataDir: C:\Users\syfur\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:54837}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:54837/devtoo..., se:cdpVersion: 134.0.6998.89, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 522b4dd62e31c6f82b4083e1664399c1 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:355) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:349) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) at jdk.proxy2/jdk.proxy2.\$Proxy46.click(Unknown Source) at com.pdl.pages.Registration_Quafox.password_and_confirm_password_matches(Registration_Quafox.java:268) at com.pdl.step_definitions.AA_Registration_02_Step_Definition.the_and_fields_match(AA_Registration_02_Step_Definition.java:36) at ?.The "WeakPass" and "WeakPass" fields match(file:///C:/EAL_iINTERNSHIP_Repo/PDLConnect_Automation_Testing/src/test/resources/</pre> | FAILED | 20.026 s |

| #  | Step / Hook Details  | Status  | Duration |
|----|--|---------|----------|
|    | features/1_REGISTRATION/Registration_Mandatory_Field_02.feature:12)<br>* Not displayable characters are replaced by '?'. |         |          |
|    | AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario)   | PASSED  | 0.775 s  |
|    | image  |         |          |
|    |   |         |          |
| 5  | When I insert invalid data inputs  | SKIPPED | 0.001 s  |
| 6  | Then The system rejects the invalid inputs   | SKIPPED | 0.001 s  |
| 7  | When I insert a duplicate email address  | SKIPPED | 0.001 s  |
| 8  | Then The system does not accept duplicate email addresses  | SKIPPED | 0.000 s  |
| 9  | When I complete the form with valid details  | SKIPPED | 0.000 s  |
| 10 | When I enter the correct "123456"  | SKIPPED | 0.000 s  |
| 11 | Then "<Registration status>" is successful   | SKIPPED | 0.000 s  |
| 12 | When I enter an incorrect OTP  | SKIPPED | 0.000 s  |
| 13 | Then An error message is displayed   | SKIPPED | 0.001 s  |
| 14 | And The OTP expires after a set time   | SKIPPED | 0.000 s  |
| 15 | When I request to resend the OTP   | SKIPPED | 0.002 s  |
| 16 | Then The OTP is resent successfully  | SKIPPED | 0.001 s  |
| 17 | When Registration is successful  | SKIPPED | 0.001 s  |
| 18 | Then The user is redirected to the homepage  | SKIPPED | 0.001 s  |
| 19 | When Registration is unsuccessful  | SKIPPED | 0.001 s  |
| 20 | Then The user is unable to access restricted pages without logging in  | SKIPPED | 0.001 s  |

### 03\_Validate User registers for an account

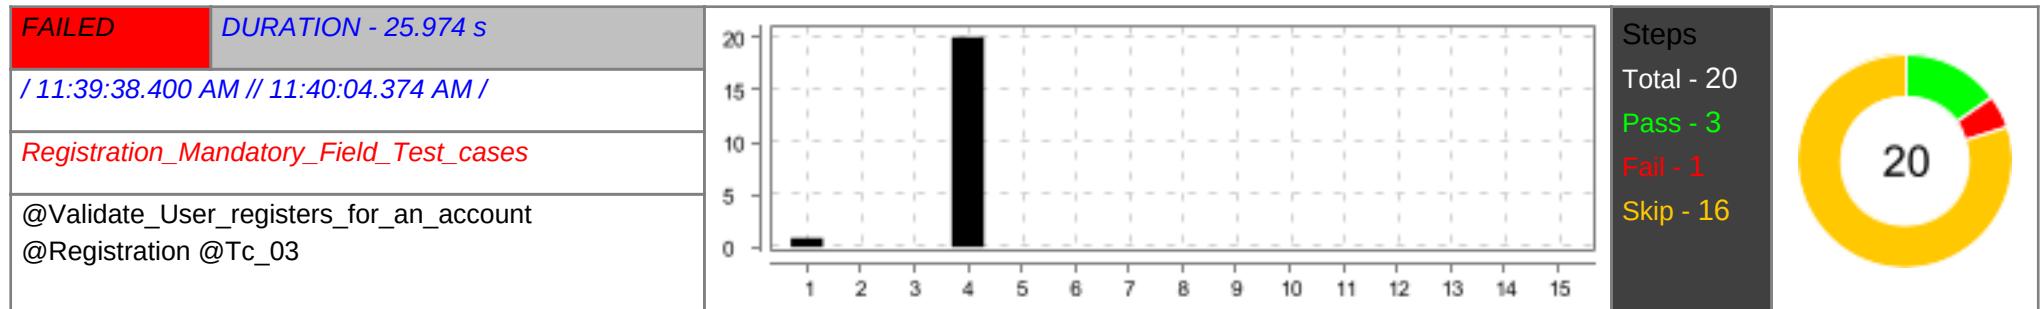



| # | Step / Hook Details   | Status | Duration |
|---|---|--------|----------|
| 1 | Given Navigate to the registration page .<br><br>AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario)<br><br>image<br>  | PASSED | 0.858 s  |
| 2 | Then I enter an "user3@test.com" address and verify proper email format validation<br><br>AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario)<br><br>image<br> | PASSED | 0.014 s  |
| 3 | And I enter a valid password that adheres to policy requirements<br><br>AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario)<br><br>image<br>                   | PASSED | 0.017 s  |


| # | Step / Hook Details   | Status | Duration |
|---|---|--------|----------|
| 4 | <p>And The "Strong@123" and "WrongPass" fields match</p> <pre>org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"xpath","selector":"/html/body/div[2]/div/div/form/fieldset[2]/div[1]/div/input"} (Session info: chrome=134.0.6998.89) For documentation on this error, please visit: https://www.selenium.dev/documentation/webdriver/troubleshooting/errors#no-such-element-exception Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.10' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [522b4dd62e31c6f82b4083e1664399c1, findElement {using=xpath, value=/html/body/div[2]/div/div/form/fieldset[2]/div[1]/div/input}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 134.0.6998.89, chrome: {chromedriverVersion: 134.0.6998.88 (7e3d5c978c6d..., userDataDir: C:\Users\syfur\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:54837}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:54837/devtoo..., se:cdpVersion: 134.0.6998.89, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 522b4dd62e31c6f82b4083e1664399c1 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:355) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:349) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) at jdk.proxy2/jdk.proxy2.\$Proxy46.click(Unknown Source) at com.pdl.pages.Registration_Quafox.password_and_confirm_password_matches(Registration_Quafox.java:268) at com.pdl.step_definitions.AA_Registration_02_Step_Definition.the_and_fields_match(AA_Registration_02_Step_Definition.java:36) at ?.The "Strong@123" and "WrongPass" fields match(file:///C:/EAL_INTERNSHIP_Repo/PDLConnect_Automation_Testing/src/test/resources/features/1_REGISTRATION/Registration_Mandatory_Field_02.feature:12) * Not displayable characters are replaced by '?'.</pre> | FAILED | 20.032 s |
|   | AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario)<br>image   | PASSED | 1.258 s  |

| #  | Step / Hook Details   | Status  | Duration |
|----|---|---------|----------|
|    |   |         |          |
| 5  | When I insert invalid data inputs                                     | SKIPPED | 0.000 s  |
| 6  | Then The system rejects the invalid inputs                            | SKIPPED | 0.000 s  |
| 7  | When I insert a duplicate email address                               | SKIPPED | 0.000 s  |
| 8  | Then The system does not accept duplicate email addresses             | SKIPPED | 0.000 s  |
| 9  | When I complete the form with valid details                           | SKIPPED | 0.001 s  |
| 10 | When I enter the correct "123456"                                     | SKIPPED | 0.001 s  |
| 11 | Then "<Registration status>" is successful                            | SKIPPED | 0.001 s  |
| 12 | When I enter an incorrect OTP   | SKIPPED | 0.001 s  |
| 13 | Then An error message is displayed                                    | SKIPPED | 0.001 s  |
| 14 | And The OTP expires after a set time                                  | SKIPPED | 0.000 s  |
| 15 | When I request to resend the OTP                                      | SKIPPED | 0.001 s  |
| 16 | Then The OTP is resent successfully                                   | SKIPPED | 0.001 s  |
| 17 | When Registration is successful                                       | SKIPPED | 0.001 s  |
| 18 | Then The user is redirected to the homepage                           | SKIPPED | 0.002 s  |
| 19 | When Registration is unsuccessful                                     | SKIPPED | 0.000 s  |
| 20 | Then The user is unable to access restricted pages without logging in | SKIPPED | 0.001 s  |

### 03\_Validate User registers for an account


|   |                     |  |  |
|---|---------------------|--|--|
| FAILED  | DURATION - 25.545 s | Steps<br>Total - 20<br>Pass - 3<br>Fail - 1<br>Skip - 16 |  |
| / 11:40:04.394 AM // 11:40:29.939 AM /                          |                     |  |  |
| Registration_Mandatory_Field_Test_cases                         |                     |  |  |
| @Validate_User_registers_for_an_account<br>@Registration @Tc_03 |                     |  |  |

| # | Step / Hook Details  | Status | Duration |
|---|--|--------|----------|
| 1 | Given Navigate to the registration page .<br>AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario)<br><b>image</b><br>   | PASSED | 0.949 s  |
| 2 | Then I enter an "existing@test.com" address and verify proper email format validation<br>AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario)<br><b>image</b><br>   | PASSED | 0.011 s  |
| 3 | And I enter a valid password that adheres to policy requirements<br>AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario)<br><b>image</b><br>   | PASSED | 0.009 s  |
| 4 | And The "Strong@123" and "Strong@123" fields match<br>org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"xpath","selector":"/html/body/div[2]/div/div/form/fieldset[2]/div[1]/div/input"} (Session info: chrome=134.0.6998.89) For documentation on this error, please visit: https://www.selenium.dev/documentation/webdriver/troubleshooting/errors#no-such-element-exception Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.10' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [522b4dd62e31c6f82b4083e1664399c1, findElement {using=xpath, value=/html/body/div[2]/div/div/form/fieldset[2]/div[1]/div/input}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 134.0.6998.89, chrome: {chromedriverVersion: 134.0.6998.88 (7e3d5c978c6d..., userDataDir: C:\Users\syfur\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:54837}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy{}, se:cdp: ws://localhost:54837/devtoo..., se:cdpVersion: 134.0.6998.89, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, | FAILED | 20.027 s |


| # | Step / Hook Details   | Status  | Duration |
|---|---|---------|----------|
|   | <pre>webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 522b4dd62e31c6f82b4083e1664399c1 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:355) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:349) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) at jdk.proxy2/jdk.proxy2.\$Proxy46.click(Unknown Source) at com.pdl.pages.Registration_Quafox.password_and_confirm_password_matches(Registration_Quafox.java:268) at com.pdl.step_definitions.AA_Registration_02_Step_Definition.the_and_fields_match(AA_Registration_02_Step_Definition.java:36) at ?.The "Strong@123" and "Strong@123" fields match(file:///C:/EAL_iINTERNSHIP_Repo/PDLConnect_Automation_Testing/src/test/resources/features/1_REGISTRATION/Registration_Mandatory_Field_02.feature:12) * Not displayable characters are replaced by '?'.</pre> |         |          |
|   | <p>AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario)</p> <p>image</p>   | PASSED  | 0.988 s  |
| 5 | When I insert invalid data inputs   | SKIPPED | 0.000 s  |
| 6 | Then The system rejects the invalid inputs  | SKIPPED | 0.000 s  |
| 7 | When I insert a duplicate email address   | SKIPPED | 0.000 s  |
| 8 | Then The system does not accept duplicate email addresses   | SKIPPED | 0.001 s  |
| 9 | When I complete the form with valid details   | SKIPPED | 0.001 s  |

| #  | Step / Hook Details   | Status  | Duration |
|----|---|---------|----------|
| 10 | When I enter the correct "123456"                                     | SKIPPED | 0.000 s  |
| 11 | Then "<Registration status>" is successful                            | SKIPPED | 0.000 s  |
| 12 | When I enter an incorrect OTP   | SKIPPED | 0.001 s  |
| 13 | Then An error message is displayed                                    | SKIPPED | 0.000 s  |
| 14 | And The OTP expires after a set time                                  | SKIPPED | 0.001 s  |
| 15 | When I request to resend the OTP                                      | SKIPPED | 0.000 s  |
| 16 | Then The OTP is resent successfully                                   | SKIPPED | 0.000 s  |
| 17 | When Registration is successful                                       | SKIPPED | 0.000 s  |
| 18 | Then The user is redirected to the homepage                           | SKIPPED | 0.002 s  |
| 19 | When Registration is unsuccessful                                     | SKIPPED | 0.001 s  |
| 20 | Then The user is unable to access restricted pages without logging in | SKIPPED | 0.000 s  |

### 03\_Validate User registers for an account

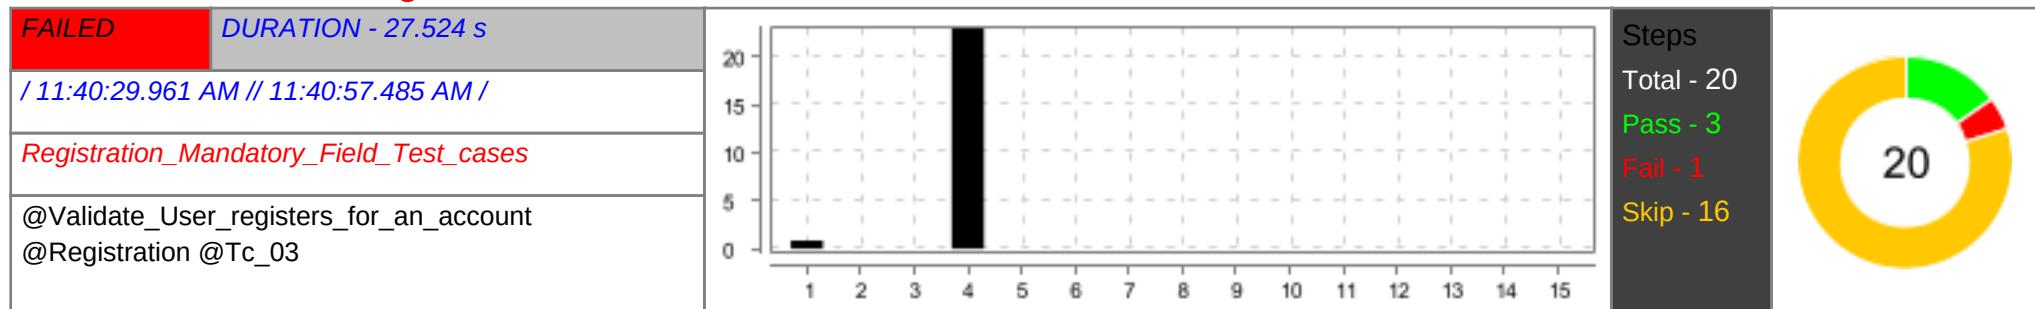

| # | Step / Hook Details  | Status | Duration |
|---|--|--------|----------|
| 1 | Given Navigate to the registration page .  | PASSED | 0.862 s  |
|   | AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario)<br><br>image<br><br> | PASSED | 0.621 s  |
| 2 | Then I enter an "user5@test.com" address and verify proper email format validation   | PASSED | 0.019 s  |
|   | AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario)<br><br>image  | PASSED | 0.725 s  |

| # | Step / Hook Details  | Status | Duration |
|---|--|--------|----------|
|   |   |        |          |
| 3 | And I enter a valid password that adheres to policy requirements   | PASSED | 0.014 s  |
|   | AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario)<br><br>  | PASSED | 0.858 s  |
| 4 | And The "Strong@123" and "Strong@123" fields match<br><br>org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.10' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [522b4dd62e31c6f82b4083e1664399c1, findElement [using, value]] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 134.0.6998.89, chrome: {chromedriverVersion: 134.0.6998.88 (7e3d5c978c6d..., userDataDir: C:\Users\syfur\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:54837}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:54837/devtoo..., se:cdpVersion: 134.0.6998.89, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 522b4dd62e31c6f82b4083e1664399c1<br>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545)<br>at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165)<br>at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59)<br>at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:355)<br>at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:349)<br>at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68)<br>at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38)<br>at jdk.proxy2/jdk.proxy2.\$Proxy46.click(Unknown Source)<br>at com.pdl.pages.Registration_Quafox.password_and_confirm_password_matches(Registration_Quafox.java:268)<br>at com.pdl.step_definitions.AA_Registration_02_Step_Definition.the_and_fields_match(AA_Registration_02_Step_Definition.java:36)<br>at ?.The "Strong@123" and "Strong@123" fields match(file:///C:/EAL_iINTERNSHIP_Repo/PDLConnect_Automation_Testing/src/test/resources/features/1_REGISTRATION/Registration_Mandatory_Field_02.feature:12)<br>Caused by: java.io.UncheckedIOException: java.net.SocketException: Connection reset<br>at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) | FAILED | 22.976 s |

| # | Step / Hook Details  | Status | Duration |
|---|--|--------|----------|
|   | at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42)<br>at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55)<br>at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:48)<br>at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:96)<br>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:188)<br>at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196)<br>at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171)<br>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518)<br>at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165)<br>at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59)<br>at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:355)<br>at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:349)<br>at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68)<br>at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38)<br>at jdk.proxy2/jdk.proxy2.\$Proxy46.click(Unknown Source)<br>at com.pdl.pages.Registration_Quafox.password_and_confirm_password_matches(Registration_Quafox.java:268)<br>at com.pdl.step_definitions.AA_Registration_02_Step_Definition.the_and_fields_match(AA_Registration_02_Step_Definition.java:36)<br>at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)<br>at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77)<br>at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)<br>at java.base/java.lang.reflect.Method.invoke(Method.java:568)<br>at io.cucumber.java.Invoker.dolInvoke(Invoker.java:66)<br>at io.cucumber.java.Invoker.invoke(Invoker.java:24)<br>at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)<br>at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)<br>at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)<br>at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)<br>at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)<br>at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81)<br>at io.cucumber.core.runner.TestStep.run(TestStep.java:53)<br>at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)<br>at io.cucumber.core.runner.TestCase.run(TestCase.java:84)<br>at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)<br>at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)<br>at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136)<br>at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)<br>at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136)<br>at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)<br>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)<br>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)<br>at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) |        |          |

| # | Step / Hook Details   | Status | Duration |
|---|---|--------|----------|
|   | <pre> at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:757) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)  Caused by: java.net.SocketException: Connection reset at java.base/sun.nio.ch.SocketChannelImpl.throwConnectionReset(SocketChannelImpl.java:394) at java.base/sun.nio.ch.SocketChannelImpl.read(SocketChannelImpl.java:426) at io.netty.buffer.PooledByteBuf.setBytes(PooledByteBuf.java:256) at io.netty.buffer.AbstractByteBuf.writeBytes(AbstractByteBuf.java:1132) at io.netty.channel.socket.nio.NioSocketChannel.doReadBytes(NioSocketChannel.java:357) at io.netty.channel.nio.AbstractNioByteChannel\$NioByteUnsafe.read(AbstractNioByteChannel.java:151) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:788) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840) </pre> <p>* Not displayable characters are replaced by '?'.</p> | FAILED | 0.016 s  |

| # | Step / Hook Details  | Status | Duration |
|---|--|--------|----------|
|   | <pre>org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.10' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [522b4dd62e31c6f82b4083e1664399c1, deleteAllCookies []] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 134.0.6998.89, chrome: {chromedriverVersion: 134.0.6998.88 (7e3d5c978c6d..., userDataDir: C:\Users\syfur\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:54837}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:54837/devtoo..., se:cdpVersion: 134.0.6998.89, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 522b4dd62e31c6f82b4083e1664399c1 at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.takeScreenshot(Hooks.java:107) Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:35039 at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:48) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:96) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:188) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.takeScreenshot(Hooks.java:107) at jdk.internal.reflect.GeneratedMethodAccessor66.invoke(Unknown Source) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at io.cucumber.java.Invoker.dolInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invokeStatic(Invoker.java:80) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:45) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)</pre> |        |          |

| # | Step / Hook Details  | Status | Duration |
|---|--|--------|----------|
|   | <pre> at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:56) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:757) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)  Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:1]:35039 at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179) at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28) </pre> |        |          |

| #  | Step / Hook Details   | Status  | Duration |
|----|---|---------|----------|
|    | <pre> at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20) at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:590) at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:583) at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:559) at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:492) at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:636) at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:629) at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:118) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840)  Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:1]:35039 Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.Net.pollConnect(Native Method) at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840) </pre> |         |          |
| 5  | When I insert invalid data inputs   | SKIPPED | 0.002 s  |
| 6  | Then The system rejects the invalid inputs  | SKIPPED | 0.002 s  |
| 7  | When I insert a duplicate email address   | SKIPPED | 0.001 s  |
| 8  | Then The system does not accept duplicate email addresses   | SKIPPED | 0.001 s  |
| 9  | When I complete the form with valid details   | SKIPPED | 0.001 s  |
| 10 | When I enter the correct "000000"   | SKIPPED | 0.002 s  |


| #  | Step / Hook Details   | Status  | Duration |
|--|---|---------|----------|
| 11   | Then "<Registration status>" is successful                            | SKIPPED | 0.001 s  |
| 12   | When I enter an incorrect OTP   | SKIPPED | 0.000 s  |
| 13   | Then An error message is displayed                                    | SKIPPED | 0.000 s  |
| 14   | And The OTP expires after a set time                                  | SKIPPED | 0.000 s  |
| 15   | When I request to resend the OTP                                      | SKIPPED | 0.001 s  |
| 16   | Then The OTP is resent successfully                                   | SKIPPED | 0.000 s  |
| 17   | When Registration is successful                                       | SKIPPED | 0.000 s  |
| 18   | Then The user is redirected to the homepage                           | SKIPPED | 0.001 s  |
| 19   | When Registration is unsuccessful                                     | SKIPPED | 0.001 s  |
| 20   | Then The user is unable to access restricted pages without logging in | SKIPPED | 0.001 s  |
|  | AFTER - com.pdl.hooks.Hooks.tearDown(io.cucumber.java.Scenario)       | FAILED  | 0.009 s  |
| <pre>org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.10' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [522b4dd62e31c6f82b4083e1664399c1, deleteAllCookies []] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 134.0.6998.89, chrome: {chromedriverVersion: 134.0.6998.88 (7e3d5c978c6d...}, userDataDir: C:\Users\syfur\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:54837}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:54837/devtoo..., se:cdpVersion: 134.0.6998.89, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 522b4dd62e31c6f82b4083e1664399c1<br/>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545)<br/>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591)<br/>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595)<br/>at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800)<br/>at com.pdl.utilities.Driver.getDriver(Driver.java:49)<br/>at com.pdl.hooks.Hooks.tearDown(Hooks.java:129)<br/>Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:1]:35039<br/>at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73)<br/>at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42)<br/>at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55)<br/>at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:48)<br/>at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:96)<br/>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:188)<br/>at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196)<br/>at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171)<br/>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518)<br/>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591)</pre> |   |         |          |

| # | Step / Hook Details   | Status | Duration |
|---|---|--------|----------|
|   | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595)<br>at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800)<br>at com.pdl.utilities.Driver.getDriver(Driver.java:49)<br>at com.pdl.hooks.Hooks.tearDown(Hooks.java:129)<br>at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)<br>at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77)<br>at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)<br>at java.base/java.lang.reflect.Method.invoke(Method.java:568)<br>at io.cucumber.java.Invoker.dolInvoke(Invoker.java:66)<br>at io.cucumber.java.Invoker.invoke(Invoker.java:24)<br>at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)<br>at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64)<br>at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46)<br>at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21)<br>at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)<br>at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81)<br>at io.cucumber.core.runner.TestStep.run(TestStep.java:53)<br>at io.cucumber.core.runner.TestCase.run(TestCase.java:90)<br>at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)<br>at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)<br>at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136)<br>at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)<br>at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136)<br>at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)<br>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)<br>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)<br>at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238)<br>at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63)<br>at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236)<br>at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53)<br>at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229)<br>at org.junit.runners.ParentRunner.run(ParentRunner.java:309)<br>at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)<br>at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)<br>at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89)<br>at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238)<br>at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63)<br>at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236)<br>at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53)<br>at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229)<br>at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) |        |          |

| # | Step / Hook Details  | Status | Duration |
|---|--|--------|----------|
|   | <pre> at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:757) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)  Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:35039 at org.asynchttpclient.netty.channel.NettyConnectListener onFailure(NettyConnectListener.java:179) at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20) at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:590) at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:583) at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:559) at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:492) at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:636) at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:629) at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:118) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840)  Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:1]:35039 Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.Net.pollConnect(Native Method) at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) </pre> |        |          |

| # | Step / Hook Details   | Status | Duration |
|---|---|--------|----------|
|   | <pre>at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840)</pre> |        |          |

### 03\_Validate User registers for an account

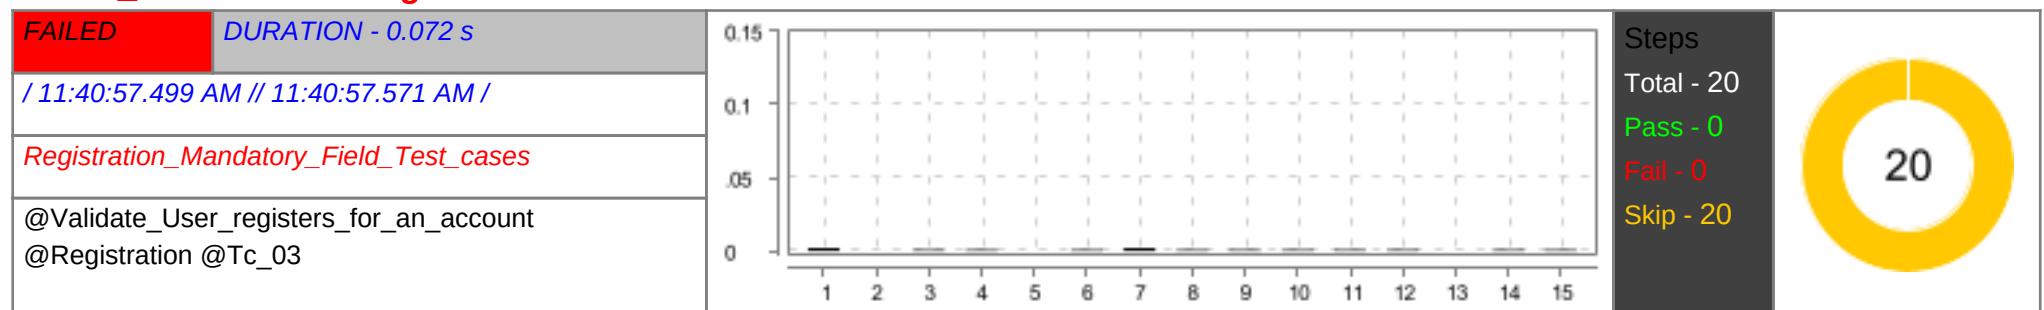

| # | Step / Hook Details   | Status | Duration |
|---|---|--------|----------|
|   | <pre>BEFORE - com.pdl.hooks.Hooks.scenarioName(io.cucumber.java.Scenario)  io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)</pre> | FAILED | 0.010 s  |

| # | Step / Hook Details  | Status | Duration |
|---|--|--------|----------|
|   | <pre> at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:757) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)  Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more Caused by: org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java. version: '17.0.10' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [522b4dd62e31c6f82b4083e1664399c1, deleteAllCookies []] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 134.0.6998.89, chrome: {chromedriverVersion: 134.0.6998.88 (7e3d5c978c6d..., userDataDir: C:\Users\syfur\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:54837}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:54837/devtoo..., se:cdpVersion: 134.0.6998.89, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 522b4dd62e31c6f82b4083e1664399c1 </pre> |        |          |

| # | Step / Hook Details   | Status | Duration |
|---|---|--------|----------|
|   | <pre> at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.&lt;init&gt;(Hooks.java:42) ... 48 more Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:35039 at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:48) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:96) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:188) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) ... 53 more Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:35039 at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179) at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20) at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:590) at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:583) at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:559) at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:492) at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:636) at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:629) at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:118) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840)  Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:35039 Caused by: java.net.ConnectException: Connection refused: no further information </pre> |        |          |

| # | Step / Hook Details   | Status | Duration |
|---|---|--------|----------|
|   | at java.base/sun.nio.ch.Net.pollConnect(Native Method)<br>at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672)<br>at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946)<br>at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337)<br>at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334)<br>at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776)<br>at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724)<br>at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650)<br>at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562)<br>at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997)<br>at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74)<br>at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30)<br>at java.base/java.lang.Thread.run(Thread.java:840)  |        |          |
|   | <p>BEFORE - com.pdl.hooks.Hooks.setUp()</p> io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks<br>at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67)<br>at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45)<br>at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)<br>at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64)<br>at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46)<br>at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21)<br>at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)<br>at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81)<br>at io.cucumber.core.runner.TestStep.run(TestStep.java:53)<br>at io.cucumber.core.runner.TestCase.run(TestCase.java:78)<br>at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)<br>at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)<br>at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136)<br>at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)<br>at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136)<br>at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)<br>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)<br>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)<br>at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238)<br>at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63)<br>at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236)<br>at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53)<br>at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229)<br>at org.junit.runners.ParentRunner.run(ParentRunner.java:309)<br>at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) | FAILED | 0.009 s  |

| # | Step / Hook Details   | Status | Duration |
|---|---|--------|----------|
|   | <pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:757) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)  Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more Caused by: org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java. version: '17.0.10' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [522b4dd62e31c6f82b4083e1664399c1, deleteAllCookies []] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 134.0.6998.89, chrome: {chromedriverVersion: 134.0.6998.88 (7e3d5c978c6d..., userDataDir: C:\Users\syfur\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:54837}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:54837/devtoo..., se:cdpVersion: 134.0.6998.89, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 522b4dd62e31c6f82b4083e1664399c1 at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.&lt;init&gt;(Hooks.java:42) ... 48 more Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/ </pre> |        |          |

| # | Step / Hook Details   | Status | Duration |
|---|---|--------|----------|
|   | <pre>[0:0:0:0:0:0:1]:35039 at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:48) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:96) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:188) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) ... 53 more Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:35039 at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179) at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20) at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:590) at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:583) at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:559) at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:492) at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:636) at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:629) at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:118) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840)  Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:1]:35039 Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.Net.pollConnect(Native Method) at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724)</pre> |        |          |

| #  | Step / Hook Details  | Status  | Duration |
|----|--|---------|----------|
|    | at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650)<br>at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562)<br>at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997)<br>at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74)<br>at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30)<br>at java.base/java.lang.Thread.run(Thread.java:840)  |         |          |
| 1  | Given Navigate to the registration page .  | SKIPPED | 0.002 s  |
| 2  | Then I enter an "user6@test.com" address and verify proper email format validation   | SKIPPED | 0.000 s  |
| 3  | And I enter a valid password that adheres to policy requirements   | SKIPPED | 0.001 s  |
| 4  | And The "Strong@123" and "Strong@123" fields match   | SKIPPED | 0.001 s  |
| 5  | When I insert invalid data inputs  | SKIPPED | 0.000 s  |
| 6  | Then The system rejects the invalid inputs   | SKIPPED | 0.001 s  |
| 7  | When I insert a duplicate email address  | SKIPPED | 0.002 s  |
| 8  | Then The system does not accept duplicate email addresses  | SKIPPED | 0.001 s  |
| 9  | When I complete the form with valid details  | SKIPPED | 0.001 s  |
| 10 | When I enter the correct "Expired"   | SKIPPED | 0.001 s  |
| 11 | Then "<Registration status>" is successful   | SKIPPED | 0.001 s  |
| 12 | When I enter an incorrect OTP  | SKIPPED | 0.001 s  |
| 13 | Then An error message is displayed   | SKIPPED | 0.000 s  |
| 14 | And The OTP expires after a set time   | SKIPPED | 0.001 s  |
| 15 | When I request to resend the OTP   | SKIPPED | 0.001 s  |
| 16 | Then The OTP is resent successfully  | SKIPPED | 0.001 s  |
| 17 | When Registration is successful  | SKIPPED | 0.001 s  |
| 18 | Then The user is redirected to the homepage  | SKIPPED | 0.001 s  |
| 19 | When Registration is unsuccessful  | SKIPPED | 0.001 s  |
| 20 | Then The user is unable to access restricted pages without logging in  | SKIPPED | 0.001 s  |
|    | AFTER - com.pdl.hooks.Hooks.before(io.cucumber.java.Scenario)<br><br>io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks<br>at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67)<br>at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45)<br>at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)<br>at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64)<br>at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46)<br>at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21)<br>at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | FAILED  | 0.012 s  |

| # | Step / Hook Details   | Status | Duration |
|---|---|--------|----------|
|   | <pre> at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:90) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:757) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)  Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) </pre> |        |          |

| # | Step / Hook Details  | Status | Duration |
|---|--|--------|----------|
|   | <pre> at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more Caused by: org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java. version: '17.0.10' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [522b4dd62e31c6f82b4083e1664399c1, deleteAllCookies []] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 134.0.6998.89, chrome: {chromedriverVersion: 134.0.6998.88 (7e3d5c978c6d...), userDataDir: C:\Users\syfur\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:54837}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:54837/devtoo..., se:cdpVersion: 134.0.6998.89, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 522b4dd62e31c6f82b4083e1664399c1 at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.&lt;init&gt;(Hooks.java:42) ... 48 more Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/ [0:0:0:0:0:0:1]:35039 at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:48) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:96) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:188) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) ... 53 more Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:35039 at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179) at org.asynchttpclient.netty.channel.NettyChannelConnector\$1 onFailure(NettyChannelConnector.java:108) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20) at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:590) at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:583) at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:559) at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:492) at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:636) at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:629) at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:118) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321) </pre> |        |          |

| # | Step / Hook Details   | Status | Duration |
|---|---|--------|----------|
|   | <pre> at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840)  Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/ [0:0:0:0:0:1]:35039 Caused by: java.net.ConnectException: Connection refused: no further information  at java.base/sun.nio.ch.Net.pollConnect(Native Method) at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840) </pre> |        |          |
|   | <p>AFTER - com.pdl.hooks.Hooks.tearDown(io.cucumber.java.Scenario)</p> <pre> io.cucumber.core.exception.CucumberException: Failed to instantiate class com.pdl.hooks.Hooks at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:81) at io.cucumber.core.runner.TestStep.run(TestStep.java:53) at io.cucumber.core.runner.TestCase.run(TestCase.java:90) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:136) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) </pre>  | FAILED | 0.011 s  |

| # | Step / Hook Details   | Status | Duration |
|---|---|--------|----------|
|   | <pre> at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:136) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:757) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)  Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 42 more Caused by: org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java. version: '17.0.10' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [522b4dd62e31c6f82b4083e1664399c1, deleteAllCookies []] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 134.0.6998.89, chrome: {chromedriverVersion: 134.0.6998.88 (7e3d5c978c6d..., userDataDir: C:\Users\syfur\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: </pre> |        |          |

| # | Step / Hook Details  | Status | Duration |
|---|--|--------|----------|
|   | <pre>{debuggerAddress: localhost:54837}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:54837/devtoo..., se:cdpVersion: 134.0.6998.89, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 522b4dd62e31c6f82b4083e1664399c1 at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:545) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800) at com.pdl.utilities.Driver.getDriver(Driver.java:49) at com.pdl.hooks.Hooks.&lt;init&gt;(Hooks.java:42) ... 48 more Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:35039 at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:48) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:96) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:188) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) ... 53 more Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:35039 at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179) at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20) at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:590) at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:583) at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:559) at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:492) at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:636) at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:629) at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:118) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997)</pre> |        |          |

| # | Step / Hook Details   | Status | Duration |
|---|---|--------|----------|
|   | <pre>at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840)  Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:1]:35039 Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.Net.pollConnect(Native Method) at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:840)</pre> |        |          |