

Feature			Scer	nario		Step			
Name	Duration	T	P	F	S	T	P	F	S
Search Functionality Test Cases	1 m 0.682 s	1	0	1	0	9	0	1	8

FAIL & SKIP SCENARIOS -- 3 --

#	Feature Name	Scenario Name
1	Search Functionality Test Cases	Verify Search Functionality Works Correctly


TAG	Scenario			Feature				
Name	T	P	F	S	T	P	F	S
@SearchFunctionality	1	0	1	0	1	0	1	0
@TC_34	1	0	1	0	1	0	1	0
@Validate_Search_Functionality	1	0	1	0	1	0	1	0

FEATURES SUMMARY -- 5 --



#	Feature Name	T	P	F	S	Duration	
1	Search Functionality Test Cases	1	0	1	0	1 m 0.682 s	

SCENARIOS SUMMARY -- 6

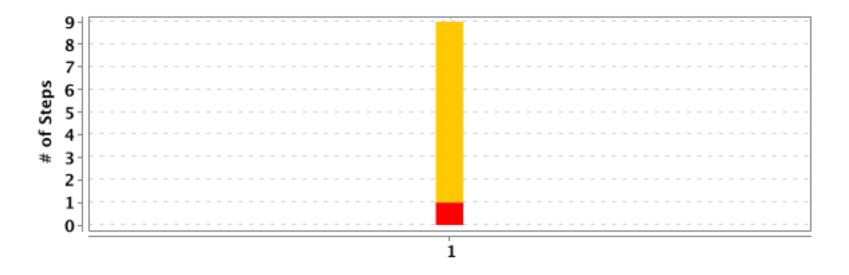


#	Feature Name	Scenario Name	T	P	F	S	Duration	
1	Search Functionality Test Cases	Verify Search Functionality Works Correctly	9	0	1	8	1 m 0.673 s	

DETAILED SECTION -- 7 -

Search Functionality Test Cases

FAILED	DURATION - 1 m 0.682 s	Scenarios		Steps	
		Total - 1		Total - 9	
/ 1:16:01.943 PM // 1	1:17:02.625 PM /	Pass - 0	1	Pass - 0	9
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 8	
		Skip - 0		Skip - 8	

Verify Search Functionality Works Correctly

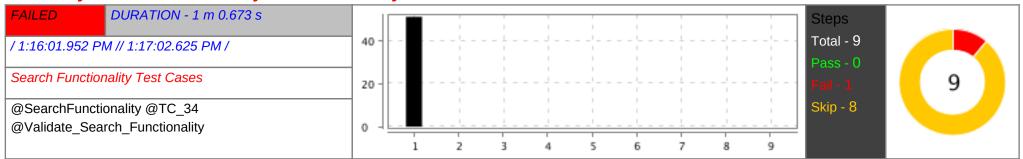

51.196 s
51.196 s

#	Step / Hook Details	Status	Duration
	at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)		
	at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)		
	at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)		
	at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238)		
	at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63)		
	at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236)		
	at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53)		
	at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229)		
	at org.junit.runners.ParentRunner.run(ParentRunner.java:309)		
	at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)		
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)		
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89)		
	at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238)		
	at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63)		
	at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236)		
	at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53)		
	at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229)		
	at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:147)		
	at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:162)		
	at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:145)		
	at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226)		
	at org.junit.runners.ParentRunner.run(ParentRunner.java:309)		
	at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93)		
	at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:757)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)		
	Caused by: java.lang.reflect.InvocationTargetException		
	at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74)		
	at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502)		
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486)		
	at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53)		
	43 more Caused by: org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error:		
	web view not found (Session info: chrome=134.0.6998.89) Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Mac OS		
	X', os.arch: 'x86_64', os.version: '12.7.6', java.version: '22.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command:		
	[8ec7ba0b1e6a27ae1f60b7a3536c7caa, deleteAllCookies {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion:		
	$134.0.6998.89, chrome: \{chromedriver Version: 134.0.6998.88 \ (7e3d5c978c6d, user Data Dir: \ /var/folders/js/1lc7jcwx1ws\}, fedcm: accounts: \ /var/folders/js/1lc7jcwx1ws\}, fedcm: accounts: \ /var/folders/js/1lc7jcwx1ws\}$		
	true, goog:chromeOptions: {debuggerAddress: localhost:49431}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName:		
	mac, proxy: Proxy(), se:cdp: ws://localhost:49431/devtoo, se:cdpVersion: 134.0.6998.89, setWindowRect: true, strictFileInteractability: false,		
	timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true,		
\perp	webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators:		

#	Step / Hook Details	Status	Duration
	true} Session ID: 8ec7ba0b1e6a27ae1f60b7a3536c7caa		
	at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62)		
	at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502)		
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52)		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595)		
	at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800)		
	at com.pdl.utilities.Driver.getDriver(Driver.java:49)		
	at com.pdl.pages.Homepage_Quafox. <init>(Homepage_Quafox.java:24)</init>		
	at com.pdl.step_definitions.G_SearchFunctionality_Steps. <init>(G_SearchFunctionality_Steps.java:9)</init>		
	at com.pdl.step_definitions.G_SearchFunctionality_Steps. <init>(G_SearchFunctionality_Steps.java:10)</init>		

#	Step / Hook Details	Status	Duration
	at com.pdl.step_definitions.G_SearchFunctionality_Steps. <init>(G_SearchFunctionality_Steps.java:10)</init>		

#	Step / Hook Details	Status	Duration
	at com.pdl.step_definitions.G_SearchFunctionality_Steps. <init>(G_SearchFunctionality_Steps.java:10)</init>		

#	Step / Hook Details	Status	Duration
	at com.pdl.step_definitions.G_SearchFunctionality_Steps. <init>(G_SearchFunctionality_Steps.java:10)</init>		

#	Step / Hook Details	Status	Duration
	at com.pdl.step_definitions.G_SearchFunctionality_Steps. <init>(G_SearchFunctionality_Steps.java:10)</init>		

#	Step / Hook Details	Status	Duration
	at com.pdl.step_definitions.G_SearchFunctionality_Steps. <init>(G_SearchFunctionality_Steps.java:10)</init>		

#	Step / Hook Details	Status	Duration
	at com.pdl.step_definitions.G_SearchFunctionality_Steps. <init>(G_SearchFunctionality_Steps.java:10)</init>		

Status Duratio	Step / Hook Details	#
	at com.pdl.step_definitions.G_SearchFunctionality_Steps. <init>(G_SearchFunctionality_Steps.java:10)</init>	

#	Step / Hook Details	Status	Duration
	at com.pdl.step_definitions.G_SearchFunctionality_Steps. <init>(G_SearchFunctionality_Steps.java:10)</init>		

#	Step / Hook Details	Status	Duration
	at com.pdl.step_definitions.G_SearchFunctionality_Steps. <init>(G_SearchFunctionality_Steps.java:10)</init>		

#	Step / Hook Details	Status	Duration
	at com.pdl.step_definitions.G_SearchFunctionality_Steps. <init>(G_SearchFunctionality_Steps.java:10)</init>		

DETAILED SECTION -- 20 --

#	Step / Hook Details	Status	Duration
	at com.pdl.step_definitions.G_SearchFunctionality_Steps. <init>(G_SearchFunctionality_Steps.java:10)</init>		

#	Step / Hook Details	Status	Duration
	at com.pdl.step_definitions.G_SearchFunctionality_Steps. <init>(G_SearchFunctionality_Steps.java:10)</init>		

#	Step / Hook Details	Status	Duration
	at com.pdl.step_definitions.G_SearchFunctionality_Steps. <init>(G_SearchFunctionality_Steps.java:10)</init>		

#	Step / Hook Details	Status	Duration
	at com.pdl.step_definitions.G_SearchFunctionality_Steps. <init>(G_SearchFunctionality_Steps.java:10)</init>		

#	Step / Hook Details	Status	Duration
	at com.pdl.step_definitions.G_SearchFunctionality_Steps. <init>(G_SearchFunctionality_Steps.java:10)</init>		

#	Step / Hook Details	Status	Duration
	at com.pdl.step_definitions.G_SearchFunctionality_Steps. <init>(G_SearchFunctionality_Steps.java:10)</init>		

#	Step / Hook Details	Status	Duration
	at com.pdl.step_definitions.G_SearchFunctionality_Steps. <init>(G_SearchFunctionality_Steps.java:10)</init>		

Duration	Status	Step / Hook Details	#
		at com.pdl.step_definitions.G_SearchFunctionality_Steps. <init>(G_SearchFunctionality_Steps.java:10)</init>	

#	Step / Hook Details	Status	Duration
	at com.pdl.step_definitions.G_SearchFunctionality_Steps. <init>(G_SearchFunctionality_Steps.java:10)</init>		

#	Step / Hook Details	Status	Duration
	at com.pdl.step_definitions.G_SearchFunctionality_Steps. <init>(G_SearchFunctionality_Steps.java:10)</init>		

#	Step / Hook Details	Status	Duration
	at com.pdl.step_definitions.G_SearchFunctionality_Steps. <init>(G_SearchFunctionality_Steps.java:10)</init>		

#	Step / Hook Details	Status	Duration
	at com.pdl.step_definitions.G_SearchFunctionality_Steps. <init>(G_SearchFunctionality_Steps.java:10)</init>		

#	Step / Hook Details	Status	Duration
	at com.pdl.step_definitions.G_SearchFunctionality_Steps. <init>(G_SearchFunctionality_Steps.java:10)</init>		

#	Step / Hook Details	Status	Duration
	at com.pdl.step_definitions.G_SearchFunctionality_Steps. <init>(G_SearchFunctionality_Steps.java:10)</init>		

#	Step / Hook Details	Status	Duration
	AFTER_STEP - com.pdl.hooks.Hooks.takeScreenshot(io.cucumber.java.Scenario)	FAILED	0.013 s
	org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=134.0.6998.89) Build info: version: '4.1.0', revision: '040bc5406b' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.7.6', java.version: '22.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [Bec7ba0b1e6a27ae1f60b7a3536c7caa, deleteAllCookies {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 134.0.6998.89, chrome: {chromedriverVersion: 134.0.6998.88 (7e3d5c978c6d, userDataDir: /var/folders/js/1lc7jcwx1ws}, fedcm:accounts: true, goog.chromeOptions: {debuggerAddress: localhost:49431}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxyl), se:cdp: ws://localhost:49431/devtoo, se:cdp/version: 134.0.6998.89, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true) Session ID: 8ec7ba0b1e6a27ae1f6ob7a3536c7caa at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:191) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:171) at org.openqa.selenium.remot		0.0133
2	Then Locate the search box.	SKIPPED	0.009 s
3	When Enter the text string "laptop" in the search box.	SKIPPED	0.005 s
4	Then Verify that the search box accepts the text input.	SKIPPED	0.002 s
5	When Enter a text string with leading and trailing spaces.	SKIPPED	0.002 s
6	And Click the search button.	SKIPPED	0.002 s
7	Then Confirm that clicking the search button initiates a search.	SKIPPED	0.005 s
8	And Upon clicking, the search results page loads.	SKIPPED	0.002 s
9	Then Confirm that the search results display relevant products containing "Laptop".	SKIPPED	0.002 s
	AFTER - com.pdl.hooks.Hooks.tearDown(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=134.0.6998.89) Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '12.7.6', java.version: '22.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [8ec7ba0b1e6a27ae1f60b7a3536c7caa, deleteAllCookies {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion:	FAILED	0.006 s

#	Step / Hook Details	Status	Duration
	134.0.6998.89, chrome: {chromedriverVersion: 134.0.6998.88 (7e3d5c978c6d, userDataDir: /var/folders/js/1lc7jcwx1ws}, fedcm:accounts:		
	true, goog:chromeOptions: {debuggerAddress: localhost:49431}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName:		
	mac, proxy: Proxy(), se:cdp: ws://localhost:49431/devtoo, se:cdpVersion: 134.0.6998.89, setWindowRect: true, strictFileInteractability: false,		
	timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true,		
	webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators:		
	true} Session ID: 8ec7ba0b1e6a27ae1f60b7a3536c7caa		
	at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62)		
	at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502)		
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52)		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591)		
	at org.openga.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595)		
	at org.openga.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions.deleteAllCookies(RemoteWebDriver.java:800)		
	at com.pdl.utilities.Driver.getDriver(Driver.java:49)		
	at com.pdl.hooks.Hooks.tearDown(Hooks.java:129)		