Frozen readout separation

Actual new labels · fixed 128-example gradients · complete probability vectors matched within each comparison

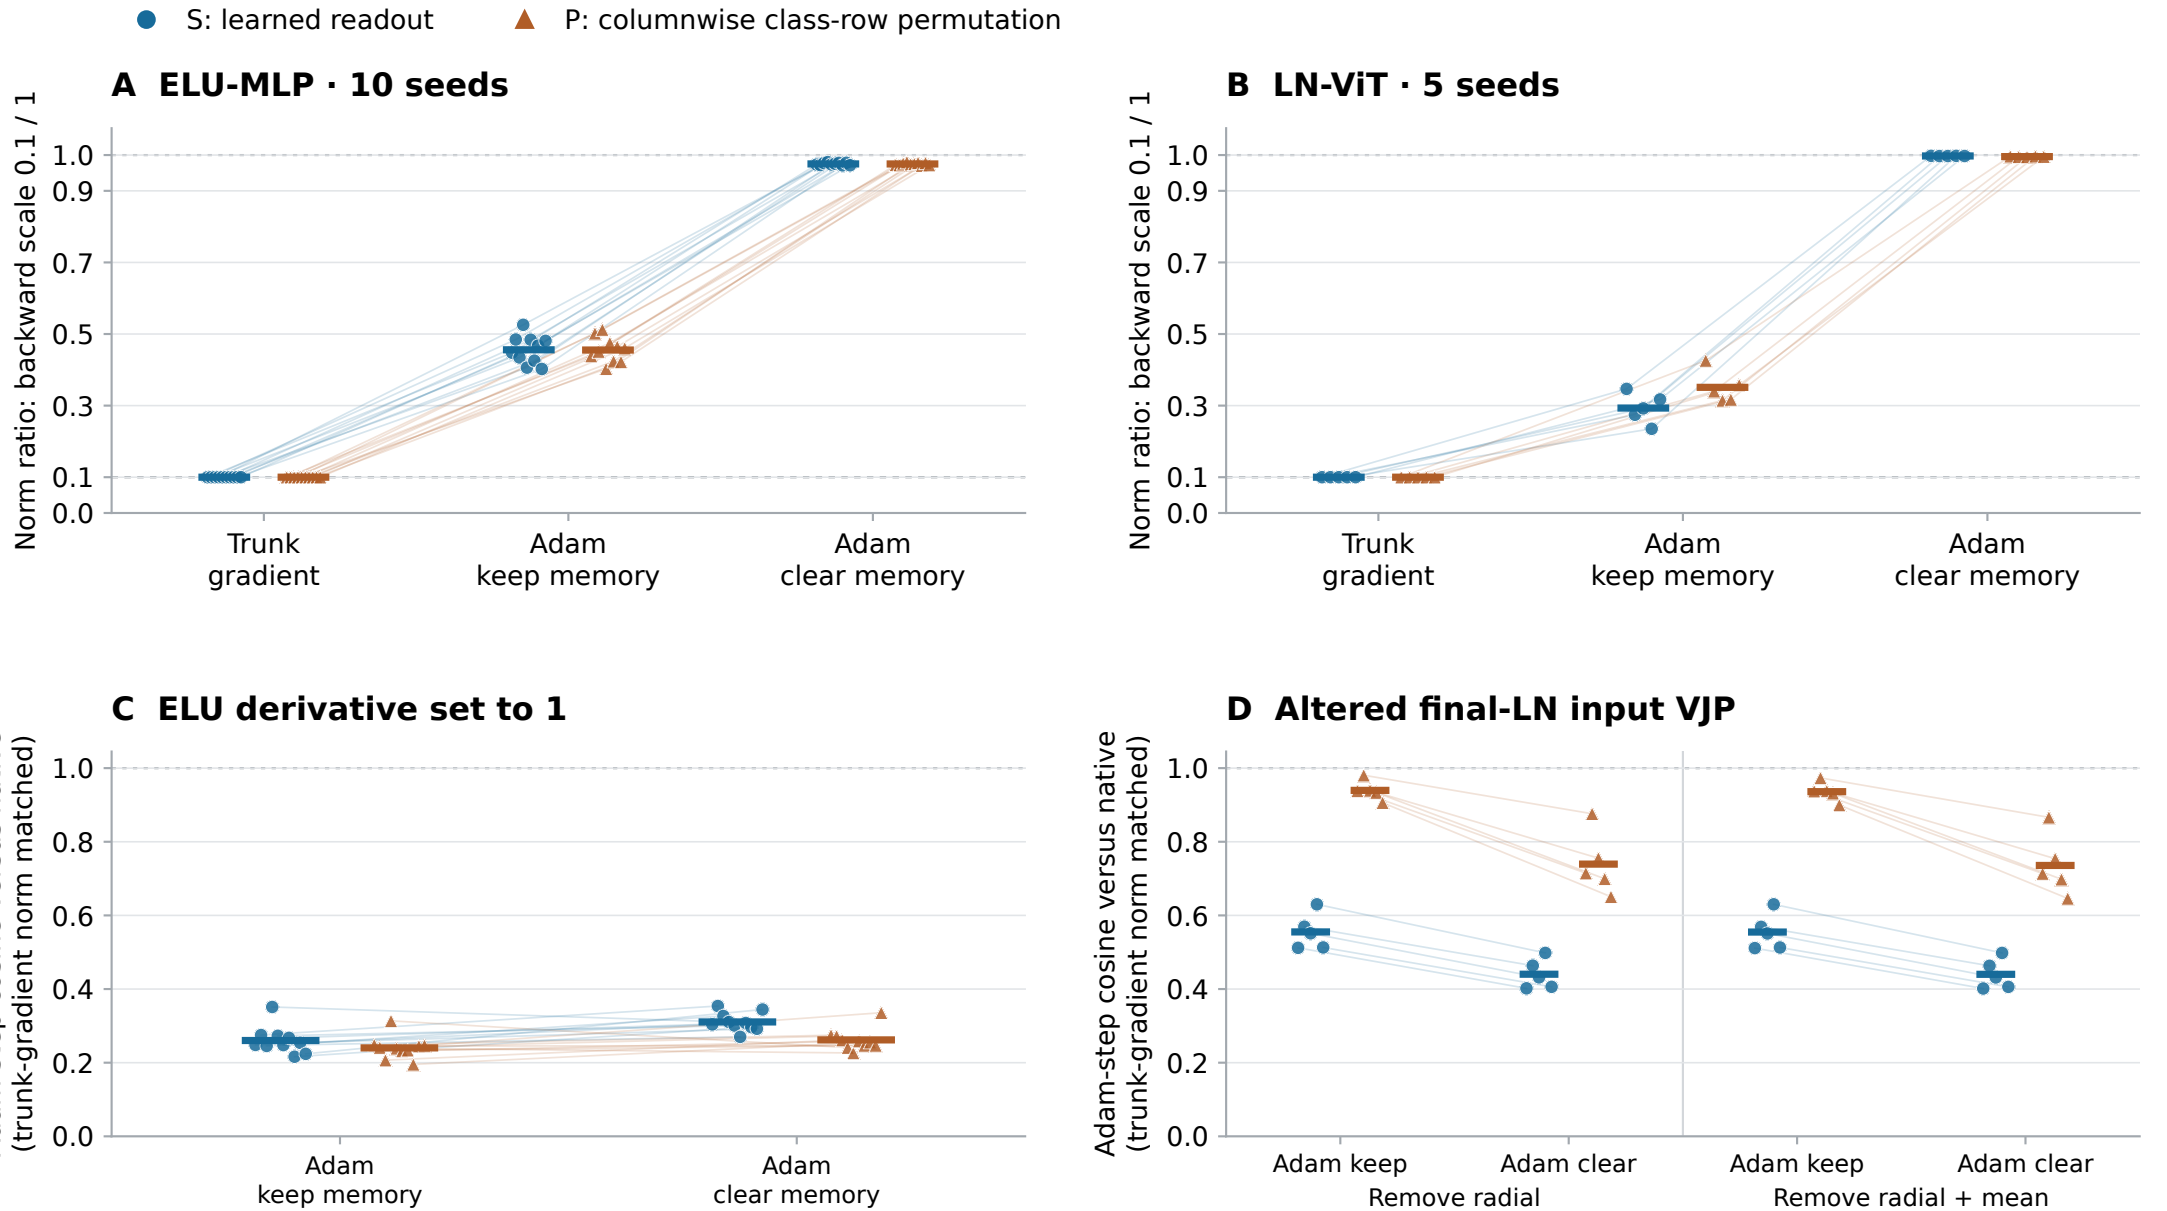

Dots are seeds; bars are seed means; faint lines join the same seed. Top ratios are paired within seed and post hoc descriptive.

Top: ratios of L2 norms at backward banks D01 / D1 (D = S or P), with forward bank D1 and native Jacobian fixed.

Bottom: cosine of virtual Adam trunk steps after matching altered/native trunk-gradient L2 norms; forward/backward bank = S1 or P1.

"Remove" omits the indicated LN subtraction. Forward outputs and final-LN affine gradients stay native; affine parameters are excluded from trunk.

All Adam steps are frozen virtual updates, not observed training-minibatch displacements. No new tests or intervals; no cross-architecture causal comparison.