A changed label assignment does not uniquely determine the remaining drive

Frozen checkpoints; paired seed bootstrap 95% intervals. Ratios are intervention mean / S mean.

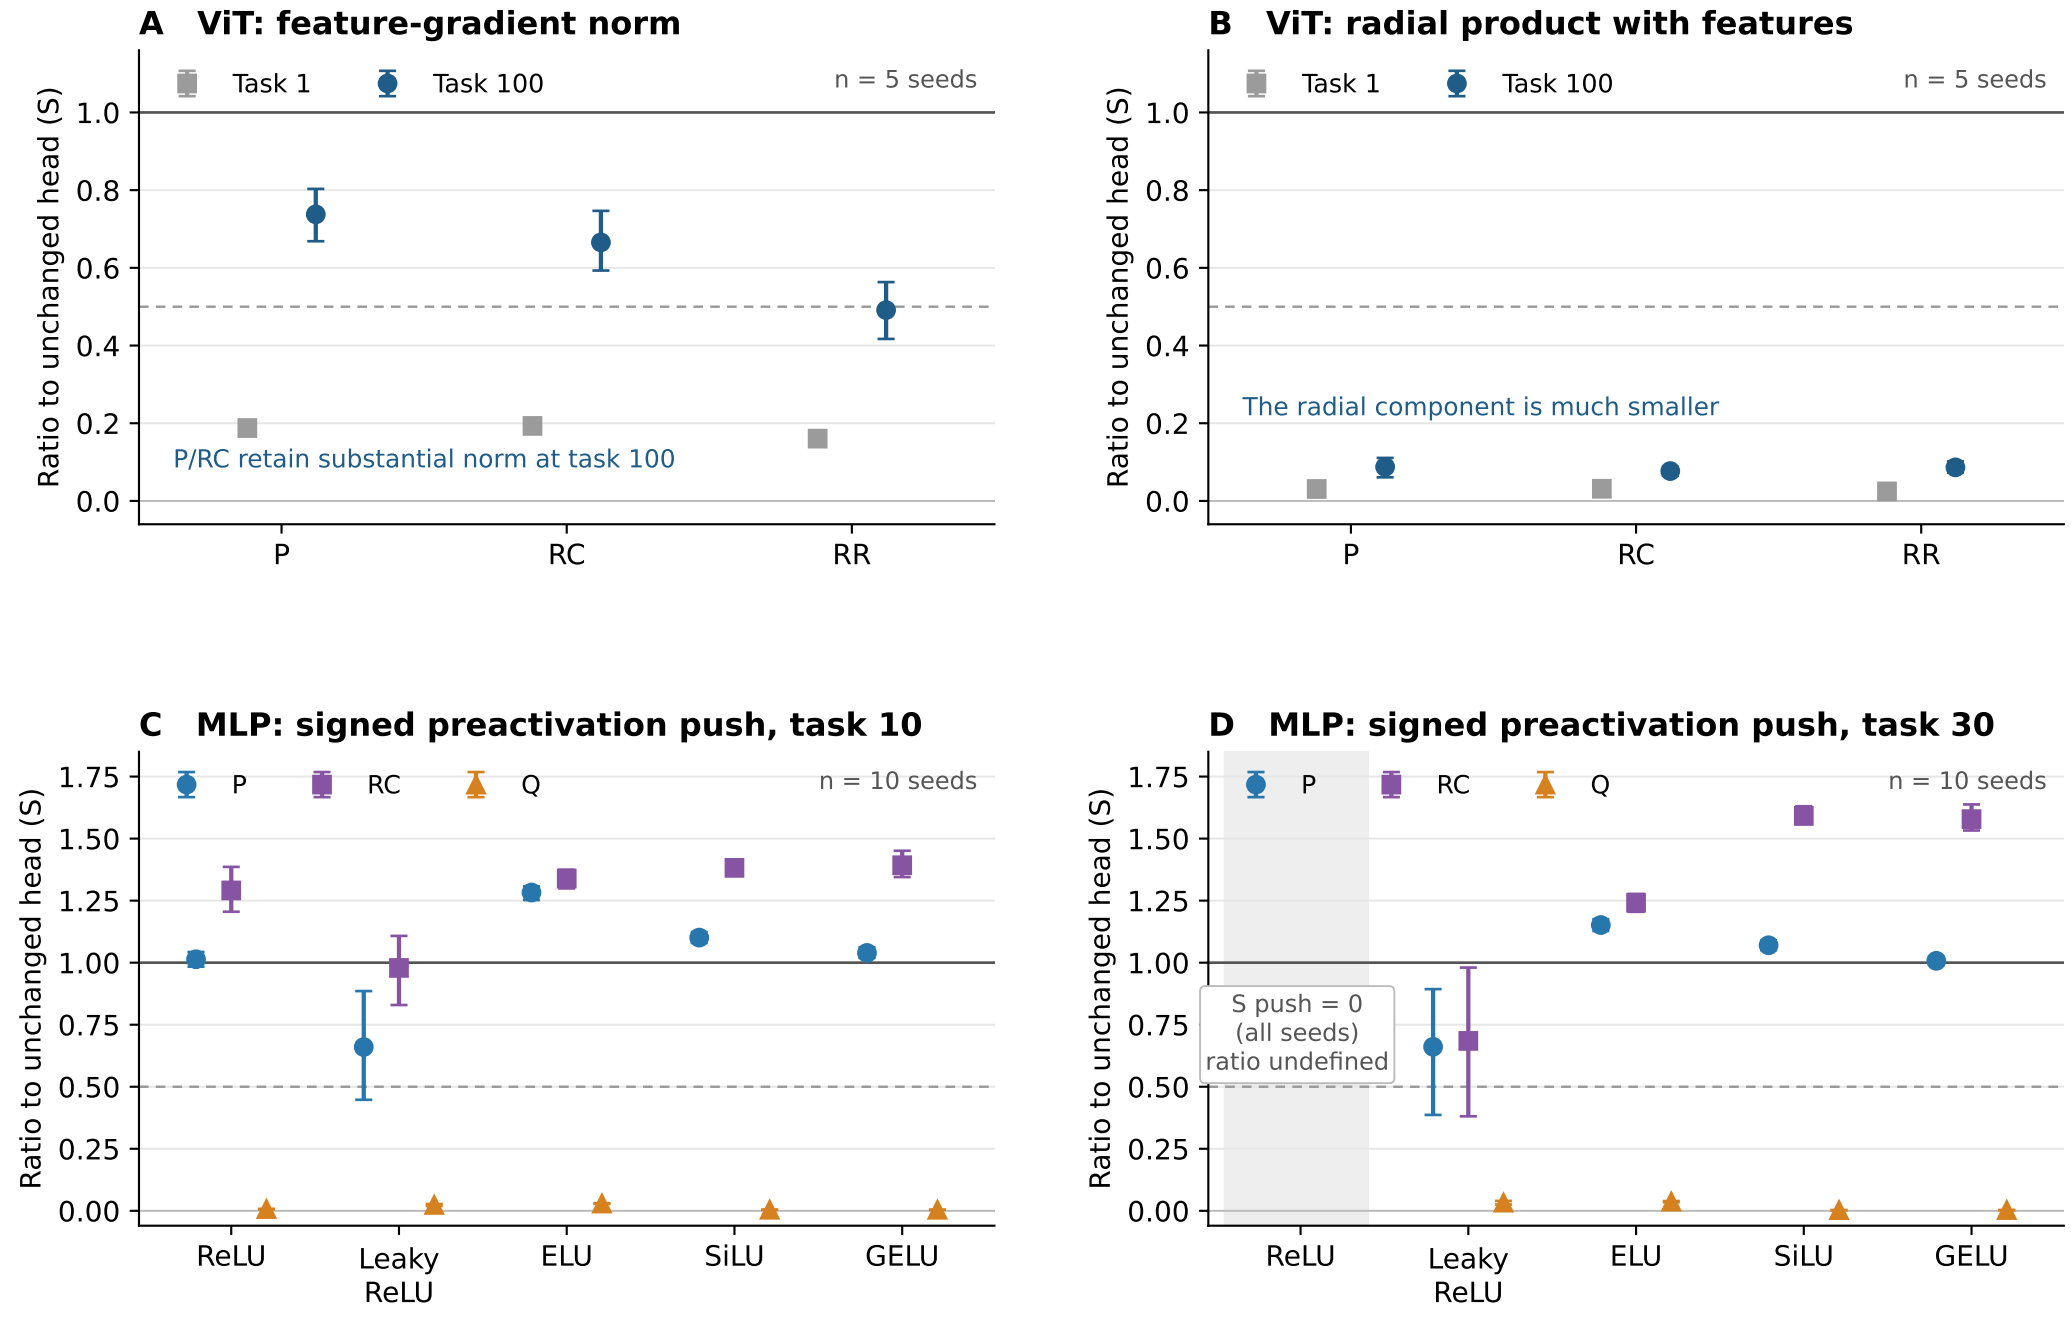

P: independent class permutations per column. RC: randomized centered columns. RR: randomized rows.

Q: centered column norms reset to initialization; P/RC/Q preserve sample-mean logits. Dashed line: preregistered 0.5 rule.

Head-input gradient norm, radial product and MLP body push are distinct estimands. These frozen probes do not test recovery.