
REC-CIS


## GE23131-Programming Using C-2024

Question 1

Correct

3.00




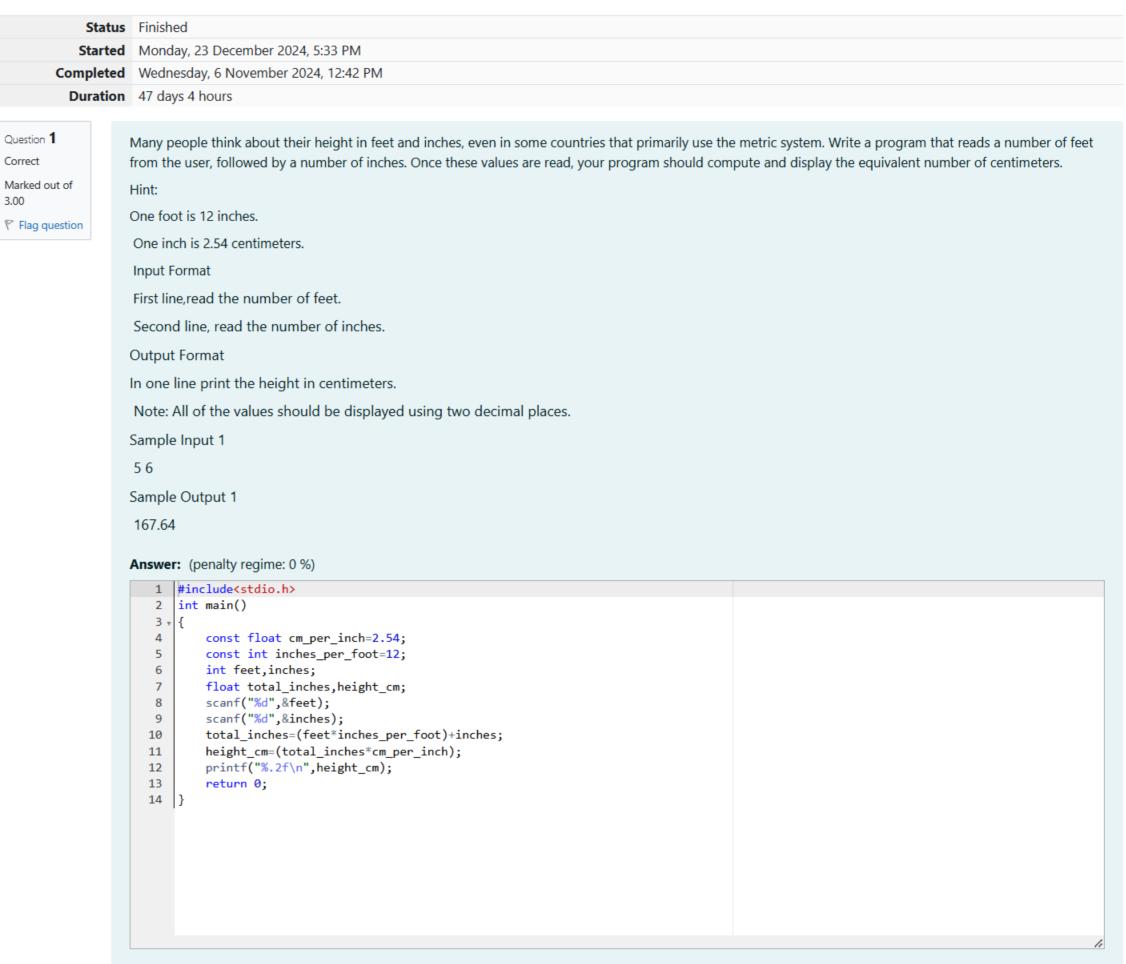

```
Input Expected Got
✓ 5 167.64 167.64 ✓
Passed all tests! <
```

Question 2 Correct Marked out of 5.00 Flag question

```
Create a program that reads two integers, a and b, from the user. Your program should compute and display: • The sum of a and b • The difference when b is
subtracted from a • The product of a and b • The quotient when a is divided by b • The remainder when a is divided by b
Input Format
First line, read the first number.
Second line, read the second number.
Output Format
First line, print the sum of a and b
Second line, print the difference when b is subtracted from a
Third line, print the product of a and b
Fourth line, print the quotient when a is divided by b
Fifth line, print the remainder when a is divided by b
Sample
Input 1 100 6
Sample Output
106 94 600 16 4
Answer: (penalty regime: 0 %)
   1 #include<stdio.h>
   2
       int main()
   3 ₹ {
   4
           int a,b;
   5
           scanf("%d %d",&a,&b);
           printf("%d\n",a+b);
   6
          printf("%d\n",a-b);
   7
           printf("%d\n",a*b);
   8
   9
           printf("%d\n",a/b);
           printf("%d\n",a%b);
  10
  11
           return 0;
  12 }
```

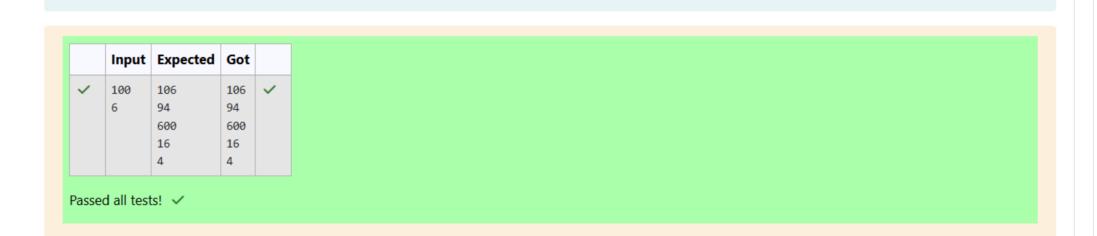

Question 3 Correct Marked out of 7.00 Flag question

A bakery sells loaves of bread for \$3.49 each. Day old bread is discounted by 60 percent. Write a program that begins by reading the number of loaves of day old bread being purchased from the user. Then your program should display the regular price for the bread, the discount because it is a day old, and the total price. Each of these amounts should be displayed on its own line with an appropriate label. All of the values should be displayed using two decimal places.

Input Format Read the number of day old loaves.

**Output Format** 

First line, print Regular price: price Second line, print Discount: discount

Third line, print Total: total

Note: All of the values should be displayed using two decimal places. Sample Input 1

10

Sample Output 1

Regular price: 34.90

Discount: 20.94 Total: 13.96

Answer: (penalty regime: 0 %)

```
1 #include<stdio.h>
   int main()
2
3 ₹ {
4
        const float regular_price_per_loaf=3.49;
        const float discount_rate=0.60;
5
6
        int num_of_loaves;
7
       float regular_price, discount, total_price;
8
       scanf("%d",&num_of_loaves);
9
       regular_price=regular_price_per_loaf*num_of_loaves;
10
        discount=regular_price*discount_rate;
11
        total_price=(regular_price-discount);
12
       printf("Regular price: %.2f\n",regular_price);
        printf("Discount: %.2f\n",discount);
13
       printf("Total: %.2f\n",total_price);
14
15
        return 0;
16 }
```

Finish review