CASE 1:: CREATE TABLE globetechtb23 (emp_id INTEGER NOT NULL,

emp_name varchar(100) NOT NULL,
job_name varchar(100) NOT NULL,
manager_id INTEGER,
hire_date NUMBER NOT NULL,
salary NUMBER,
commission NUMBER,

dep id INTEGER NOT NULL);

INSERT INTO globetechtb23 (emp_id, emp_name, job_name, manager_id, hire_date, salary, commission, dep_id)

VALUES (68319, 'KAYLING', 'PRESIDENT', NULL, 1991-11-18, 6000.00, NULL, 1001);

INSERT INTO globetechtb23 (emp_id, emp_name, job_name, manager_id, hire_date, salary, commission, dep_id)

VALUES (66928, 'BLAZE', 'MANAGER', 68319, 1991-05-01, 2750.00, NULL, 3001);

INSERT INTO globetechtb23 (emp_id, emp_name, job_name, manager_id, hire_date, salary, commission, dep_id)

VALUES (67832, 'CLARE', 'MANAGER', 68319, 1991-06-09, 2550.00, NULL, 1001);

INSERT INTO globetechtb23 (emp_id, emp_name, job_name, manager_id, hire_date, salary, commission, dep_id)

VALUES (65646, JONAS', 'MANAGER', 68319, 1991-04-02, 2957.00, NULL, 2001);

INSERT INTO globetechtb23(emp_id, emp_name, job_name, manager_id, hire_date, salary, commission, dep_id)

VALUES (67858, 'SCARLET', 'ANALYST', 65646, 1997-04-19, 3100.00, NULL, 2001);

INSERT INTO globetechtb23(emp_id, emp_name, job_name, manager_id, hire_date, salary, commission, dep_id)

VALUES (69062, 'FRANK', 'ANALYST', 65646, 1991-12-03, 3100.00, NULL, 2001);

INSERT INTO globetechtb23 (emp_id, emp_name, job_name, manager_id, hire_date, salary, commission, dep_id)

VALUES (63679, 'SANDRINE', 'CLERK', 69062, 1990-12-18, 900.00, NULL, 2001);

INSERT INTO globetechtb23 (emp_id, emp_name, job_name, manager_id, hire_date, salary, commission, dep_id)

VALUES (64989, 'ADELYN', 'SALESMAN', 66928, 1991-02-20, 1700.00, 400.00, 3001);

INSERT INTO globetechtb23 (emp_id, emp_name, job_name, manager_id, hire_date, salary, commission, dep_id)

VALUES (65271, 'WADE', 'SALESMAN', 66928, 1991-02-22, 1350.00, 600.00, 3001);

INSERT INTO globetechtb23 (emp_id, emp_name, job_name, manager_id, hire_date, salary, commission, dep_id)

VALUES (66564, 'MADDEN', 'SALESMAN', 66928, 1991-09-28, 1350.00, 1500.00, 3001);

INSERT INTO globetechtb23 (emp_id, emp_name, job_name, manager_id, hire_date, salary, commission, dep_id)

VALUES (68454, 'TUCKER', 'SALESMAN', 66928, 1991-09-08, 1600.00, 0.00, 3001);

INSERT INTO globetechtb23 (emp_id, emp_name, job_name, manager_id, hire_date, salary, commission, dep_id)


VALUES (68736, 'ADNRES', 'CLERK', 67858, 1997-05-23, 1200.00, NULL, 2001);

INSERT INTO globetechtb23 (emp_id, emp_name, job_name, manager_id, hire_date, salary, commission, dep_id)


VALUES (69000, 'JULIUS', 'CLERK', 66928, 1991-12-03, 1050.00, NULL, 3001);

INSERT INTO globetechtb23 (emp_id, emp_name, job_name, manager_id, hire_date, salary, commission, dep_id)


VALUES (69324, 'MARKER', 'CLERK', 67832, 1992-01-23, NULL, NULL, 1001);

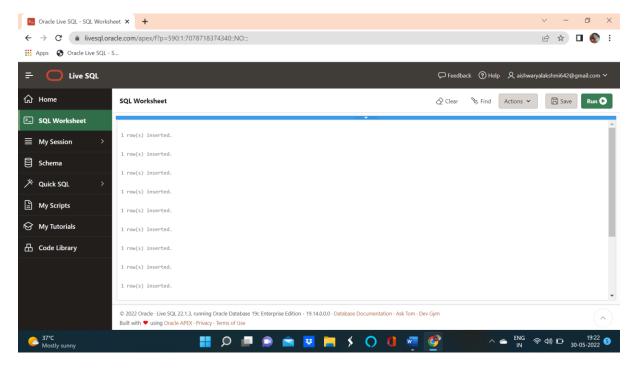


CASE 2:: select emp id, salary from globetechtb23;

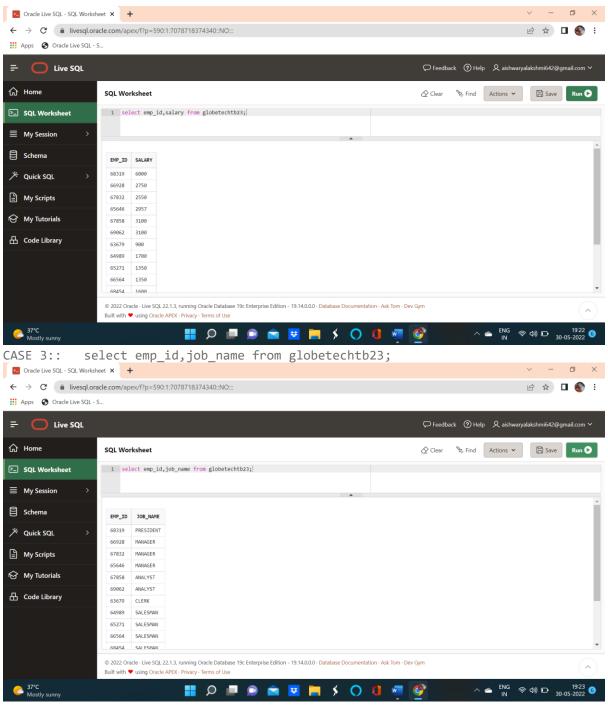

CASE 4:: SELECT emp_name, to_char(1.15*salary,'\$99,999') AS "Salary" from globetechtb23;

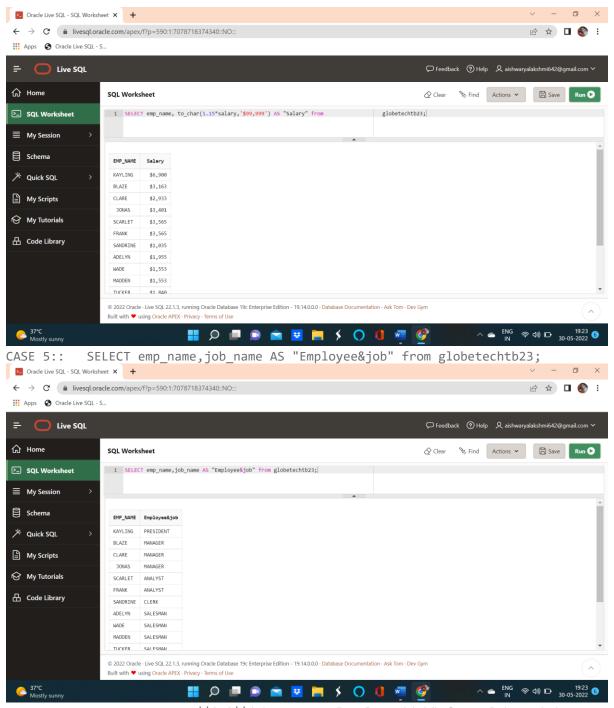

CASE 6:: SELECT emp_name||' '||job_name AS "Employee&job" from globetechtb23;

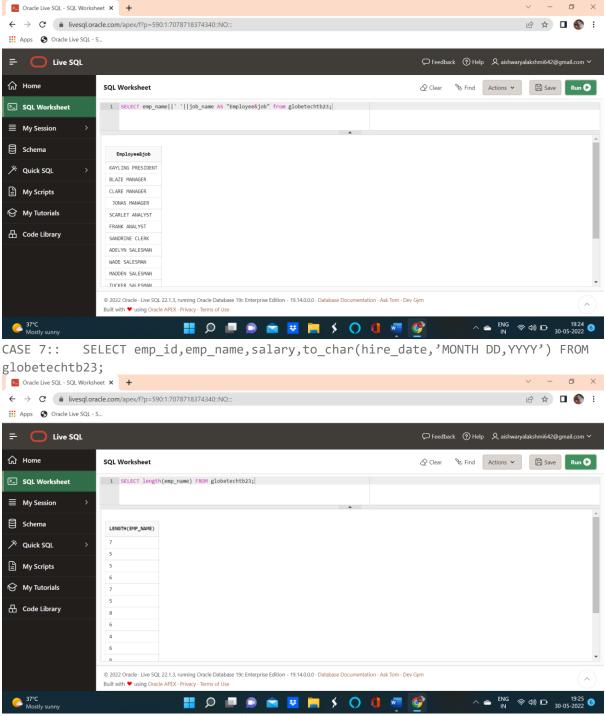

CASE 8:: SELECT length(emp_name) FROM globetechtb23;