



Developers Documentation

2023



Change log

Version	Date	Description
07	2023-01-26	Update of format in parameters of the List of Parameters of REST API.
06	2022-10-20	ISO 3166 Code List Update for REST API countries.
05	2021-06-15	Update of List of Response Codes of REST API.
04	2020-10-09	• Adding new services and REST API ◦ Subscription with Tokenization ◦ Tokenized Card Subscription ◦ Refunds
03	2020-08-13	• REST API Response Codes List Update. • Updating of the ISO 3166 Code List for Countries. • Adding Credit/Debit Cards for testing
02	2020-05-13	Description of parameters in REST API.
01	2019-09-13	First version finished.

Content

Generalities	6
Goal	6
Audience	6
Summary	6
SandBox	6
Contact	6
Payment with Tokenization	7
Description	7
Use	7
Steps	7
Diagram	8
Code	8
Generate Device Fingerprint	8
Send payment	9
Notes	13
Payment with Tokenized Card	14
Description	14
Use	14
Steps	14
Diagram	15
Code	15
Generate Device Fingerprint	15
Send Payment	16
Notes	19
Subscription with Tokenization	20
Description	20
Use	20
Steps	20
Diagram	21
Code	21
Generate Device Fingerprint	21

Send subscription	22
Unsubscribe	25
Notes	26
Tokenized Card Subscription	28
Description	28
Use	28
Steps	28
Diagram	29
Code	29
Generate Device Fingerprint	29
Send subscription	30
Unsubscribe	32
Notes	34
Refund	35
Description	35
Use	35
Steps	35
Diagram	35
Code	36
Refund Payment	36
Notes	37
Webhooks	39
Description	39
Use	39
Configuration	39
Events	39
Types	39
Information	40
Signature	41
Code	42
Read and verify webhook	42
Response	43
Appendix	44

List of Parameters of REST API	44
List of Returned Values of REST API	50
List of HTTP Status Codes of REST API	52
List of Response Codes of REST API	53
List of ISO 3166 Country Codes	54
List of ISO State Codes of the United States	57
Credit/Debit Cards for test	60

Generalities

Goal

To give developers a guide for an easy and quick integration with the services Pagadito offers with technologies which is compatible.

Audience

Software Developers, Integration Leads, Project Managers, IT Managers.

Summary

This is a Guide of Integration with each of the services Pagadito offers to Developers and Merchants. You have a description of each service, steps how it works, an integration diagram between your website with Pagadito and example codes for each technology with Pagadito is compatible.

With this guide you will understand how each service works and get an easy and quick integration of your website with Pagadito, both its testing platform SandBox and its live environment.

SandBox

Pagadito has a testing platform for you to make all the tests you need during the integration of your website, app or system with Pagadito. You can go clicking on the link <https://sandbox.pagadito.com/>.

Contact

In any doubt, please contact us to our email developers@pagadito.com.

Payment with Tokenization

Description

Consist in processing payments for a Merchant without redirection, where Merchant requests to the user his credit/debit card information and send it to Pagadito. Additional to the charge, Pagadito generates a token associated with the credit/debit card, to send future charges using only this token instead of all the credit/debit card information. This service does not require the user to be redirected to a payment screen, that is why your website or app is in charge of the complete payment process. Communication with Pagadito is through an API REST.


Use

This is a variant of the payment without redirection, ideal for websites or apps that receive payments with credit/debit cards which already request this information and makes charges to the credit/debit without asking the information again.

Steps

1. User arrives to your website, picks products or services to buy and enters his credit/debit card information.
2. Your website sends to Pagadito the information of the payment.
3. Pagadito processes the payment.
4. Pagadito return the information of the payment including the token associated with the credit/debit card.
5. Your website shows a confirmation page.

Diagram

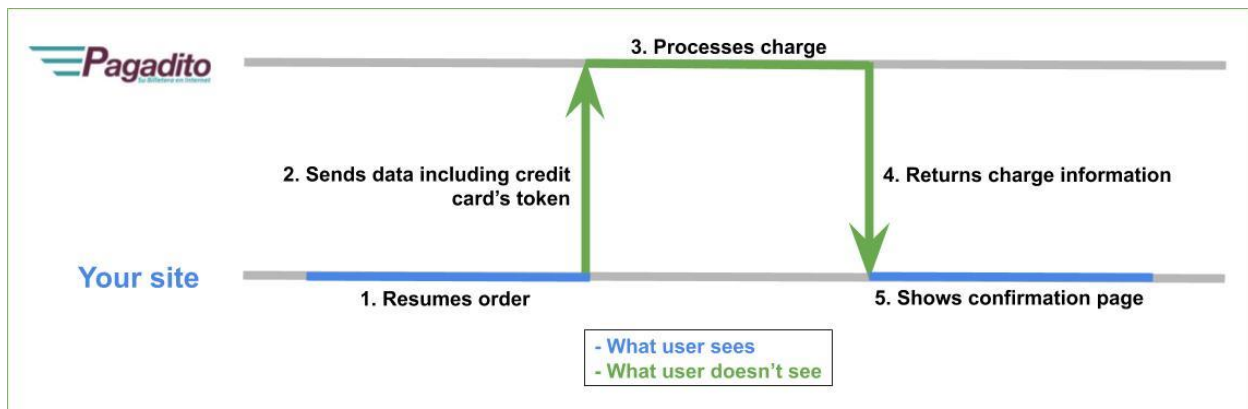

Process of Payment with Tokenization with Pagadito

Code

To connect to the API, your server must support HTTPS connections:

- HTTP/1.1
- TLS 1.2

The request header:

- "Content-Type" must be set to "Application/json;charset=UTF-8".
- "Content-Length" must be set to the length in byte of the request parameters.

Generate Device Fingerprint

Before to send the payment request, you must generate the Device Fingerprint of the user. This value is generated based on his navigation information; for this you must include the library and add an input in your website form or app with the value generated. Pagadito uses in a secure way this information to analyze the risk level of the transaction.

[JAVASCRIPT]

```
<html>
  <head>
    <meta charset="ISO-8859-1">

    <!-- You have to include this library -->
    <script type="text/javascript" src="cybs_devicefingerprint.js">
    </script>
```



```

</head>
<body>
  <script type="text/javascript">
    <!-- Add order and payment inputs -->

    <!-- If your project is live, replace SANDBOX by LIVE -->
    document.write('<input type="hidden" name="deviceFingerprintID"
value="' + cybs_dfprofiler("pagadito", "SANDBOX") + '">');
  </script>
</body>
</html>

```

Send payment

To send a payment request, you have to send the connection credentials of the Merchant Account, an identifier of the transaction (ERN), the details (quantity, description, price), the credit/debit card information of the user and the navigation information.

[REST API]

Endpoint

- SandBox -> <https://sandbox-api.pagadito.com/v1/customer/>
- Live -> <https://api.pagadito.com/v1/customer/>

Authentication

Authentication to the API is performed via HTTP Basic Auth. Provide your UID key as the basic username value and WSK key as the basic auth password value.

```

/* Copy from Technical Configuration -> Integration Parameters */
Username:USE-YOUR-UID
Password:USE-YOUR-WSK

```

Request

```

{
  "card":{
    "number":"5555555555554444",
    "expirationDate":"01/2022",

```

```

    "cvv": "123",
    "cardHolderName": "JOHN SMITH",
    "firstName": "John",
    "lastName": "Smith",
    "billingAddress": {
      "city": "San Salvador",
      "state": "San Salvador",
      "zip": "",
      "countryId": "740",
      "line1": "7a calle poniente bis",
      "phone": "+503 7695 4199"
    },
    "email": "johnsmith@correo.com"
  },
  "transaction": {
    "merchantTransactionId": "Inv 001-002",
    "currencyId": "USD",
    "transactionDetails": [
      {
        "quantity": "1",
        "description": "Pair of Red Shoes Size 8",
        "amount": "40.00"
      },
      {
        "quantity": "1",
        "description": "Pair of Blue Jeans Size 32",
        "amount": "30.00"
      }
    ]
  },
  "browserInfo": {
    "deviceFingerprintID": "SET-DEVICE-FINGERPRINT-GENERATED",
    "customerIp": "SET-USER-PUBLIC-IP-ADDRESS"
  }
}

```

Response

```

{
  "response_code": "PG200-00",
  "response_message": "Operation successful",

```

```

    "request_id":"ffeff36538f2a7bbe82a9b6e4d92dcb3",
    "customer_reply":{
        "payment_token":"cus_60f1807778bf30c9",
        "authorization":"4DDC2F64",
        "merchantTransactionId":"Inv 001-002",
        "totalAmount":"70.00",
        "firstName":"John",
        "lastName":"Smith",
        "paymentDate":"2019-07-31T12:03:01-06:00"
    },
    "request_date":"2019-07-31T12:03:02-06:00"
}

```

[API PHP]

```

<?php
/* If your project is live, uncomment the following line, and
comment the next one */
/* define("GATEWAY_URL", "https://api.pagadito.com/v1/"); */
define("GATEWAY_URL", "https://sandbox-api.pagadito.com/v1/");

/* Copy from Technical Configuration -> Integration Parameters */
define("KEY_UID", "USE-YOUR-UID");
define("KEY_WSK", "USE-YOUR-WSK");

require_once('class.pagadito.php');

$params = array(
    /* You have to add the credit card and billing information */
    'card' => array(
        'number'          => '5555555555554444',
        'expirationDate'  => '01/2022',
        'cvv'             => '123',
        'cardHolderName'  => 'JOHN SMITH',
        'firstName'       => 'John',
        'lastName'        => 'Smith',
        'billingAddress' => array(
            'city'         => 'San Salvador',
            'state'        => 'San Salvador',
            'zip'          => '',
            'countryId'    => '740',

```

```

        'line1'      => '7a calle poniente bis',
        'phone'      => '+503 7777 8888',
    ),
    'email'          => 'johnsmith@correo.com',
),
/* You have to add the transaction information, including the
details */
'transaction' => array(
    'merchantTransactionId' => 'Inv 001-002',
    'currencyId'            => 'USD',
    'transactionDetails' => array(
        array(
            'quantity'      => '1',
            'description'    => 'Pair of Red Shoes Size 8',
            'amount'        => '40.00',
        ),
        array(
            'quantity'      => '1',
            'description'    => 'Pair of Blue Jeans Size 32',
            'amount'        => '30.00',
        )
    ),
),
/* You have to add the navigation information */
'browserInfo' => array(
    'deviceFingerprintID' => SET-DEVICE-FINGERPRINT-GENERATED,
    'customerIp' => 'SET-USER-PUBLIC-IP-ADDRESS',
),
);

/* Now, you send information to Pagadito */
$Pagadito = new Pagadito(false);
$res = $Pagadito->createPayment($params);

/* You may store the information received */
print_r($res);

```

?>

Notes



- To enable “Pay with Tokenization” you have to request it to Technical Team of Pagadito, indicating the Merchant Account.
- For this service, payment is only allowed in United States Dollars (USD).

Related topics

Payment with Tokenized Card.

APPENDIX List of Parameters of REST API.

APPENDIX List of Returned Values of REST API.

APPENDIX List of HTTP Status Codes of REST API.

APPENDIX List of Response Codes of REST API.

APPENDIX List of ISO 3166 Country Codes.

APPENDIX List of ISO State Codes for the United States.

APPENDIX Credit/Debit Cards for test.

Webhooks.

Payment with Tokenized Card

Description

Consists in processing payments for a Merchant without redirection, using the token associated with a credit/debit card processed and tokenized previously. This service does not require the user to be redirected to a payment screen, that's why your website or app is in charge of the complete payment process. Communication with Pagadito is through an API REST.


Use

Ideal for websites or apps that makes charges to the credit/debit card of the user without requiring he enters the information again. With this service, your website or app will be able to send new charges without being the user present nor he has to enter his credit/debit card information again, because when the initial charge is processed, an identifier is generated to be reused.

Steps

1. User arrives to your website, picks products or services to buy and enters his credit/debit card information.
2. Your website send to Pagadito the information of the payment including the token associated with the card.
3. Pagadito processes the payment.
4. Pagadito return the information of the payment including the token associated with the credit/debit card.
5. Your website shows a confirmation page.

Diagram

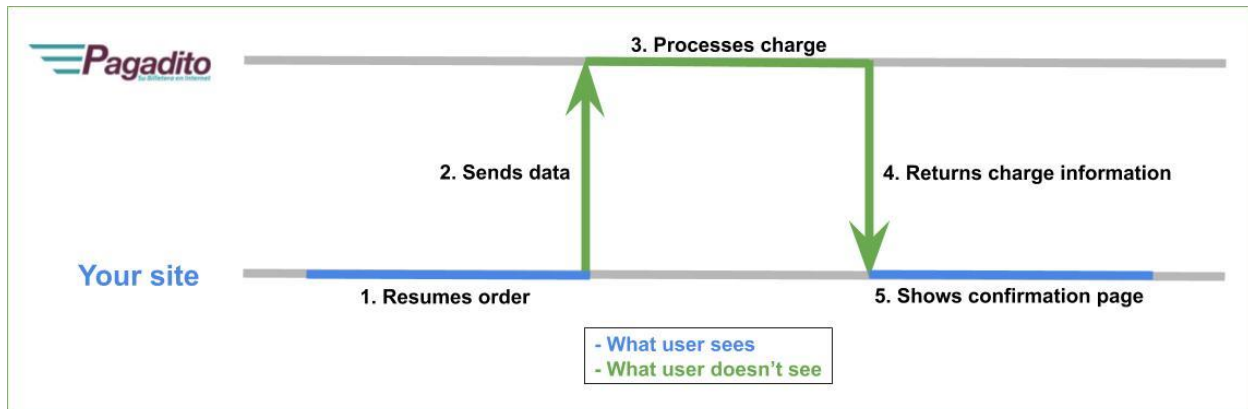

Process of Payment with Tokenized Card with Pagadito

Code

To connect to the API, your server must support HTTPS connections:

- HTTP/1.1
- TLS 1.2

The request header:

- “Content-Type” must be set to “Application/json;charset=UTF-8”
- “Content-Length” must be set to the length in byte of the request parameters.

Generate Device Fingerprint

Before to send the payment request, you must generate the Device Fingerprint of the user. This value is generated based on his navigation information; for this you must include the library and add an input in your website form or app with the value generated. Pagadito uses in a secure way this information to analyze the risk level of the transaction.

[JAVASCRIPT]

```
<html>
  <head>
    <meta charset="ISO-8859-1">

    <!-- You have to include this library -->
    <script type="text/javascript" src="cybs_devicefingerprint.js">
    </script>
```

```

</head>
<body>
  <script type="text/javascript">
    <!-- Add order and payment inputs -->

    <!-- If your project is live, replace SANDBOX by LIVE -->
    document.write('<input type="hidden" name="deviceFingerprintID"
value="' + cybs_dfprofiler("pagadito", "SANDBOX") + '">');
  </script>
</body>
</html>

```

Send Payment

To send a payment request, you have to send the connection credentials of the Merchant Account, an identifier of the transaction (ERN), the details (quantity, description, price), the token associated with the credit/debit card of the user and the navigation information.

[REST API]

Endpoint

- SandBox -> <https://sandbox-api.pagadito.com/v1/payment/>
- Live -> <https://api.pagadito.com/v1/payment/>

Authentication

Authentication to the API is performed via HTTP Basic Auth. Provide your UID key as the basic username value and WSK key as the basic auth password value.

```

/* Copy from Technical Configuration -> Integration Parameters */
Username:USE-YOUR-UID
Password:USE-YOUR-WSK

```

Request

```

{
  "payment_token": "SET-CREDIT-CARD-TOKEN",
  "transaction": {
    "merchantTransactionId": "Inv 001-003",

```



```

    "currencyId": "USD",
    "transactionDetails": [
      {
        "quantity": "1",
        "description": "Pair of Red Shoes Size 8",
        "amount": "40.00"
      },
      {
        "quantity": "1",
        "description": "Pair of Blue Jeans Size 32",
        "amount": "30.00"
      }
    ],
    "browserInfo": {
      "deviceFingerprintID": "SET-DEVICE-FINGERPRINT-GENERATED",
      "customerIp": "SET-USER-PUBLIC-IP-ADDRESS"
    }
  }
}

```

Response

```

{
  "response_code": "PG200-00",
  "response_message": "Operation successful",
  "request_id": "ea39067690a9662b43b24336f9f6916c",
  "customer_reply": {
    "payment_token": "cus_60f1807778bf30c9",
    "authorization": "10A64EF6",
    "merchantTransactionId": "Inv 001-003",
    "totalAmount": "70.00",
    "firstName": "John",
    "lastName": "Smith",
    "paymentDate": "2019-07-31T12:03:01-06:00"
  },
  "request_date": "2019-08-06T14:41:07-06:00"
}

```

[API PHP]

```

<?php
    /* If your project is live, uncomment the following line, and
    comment the next one */
    /* define("GATEWAY_URL", "https://api.pagadito.com/v1/"); */
    define("GATEWAY_URL", "https://sandbox-api.pagadito.com/v1/");

    /* Copy from Technical Configuration -> Integration Parameters */
    define("KEY_UID", "USE-YOUR-UID");
    define("KEY_WSK", "USE-YOUR-WSK");

    require_once('class.pagadito.php');

    $params = array(
        /* You have to add the credit card's token returned by Pagadito
        previously */
        'payment_token' => 'cus_9975e21bc064cd00',
        /* You have to add the transaction information, including the
        details */
        'transaction' => array(
            'merchantTransactionId' => 'Inv 001-003',
            'currencyId' => 'USD',
            'transactionDetails' => array(
                array(
                    'quantity' => '1',
                    'description' => 'Pair of Red Shoes Size 8',
                    'amount' => '40.00',
                ),
                array(
                    'quantity' => '1',
                    'description' => 'Pair of Blue Jeans Size 32',
                    'amount' => '30.00',
                )
            ),
        ),
        /* You have to add the navigation information */
        'browserInfo' => array(
            'deviceFingerprintID' => SET-DEVICE-FINGERPRINT-GENERATED,
            'customerIp' => 'SET-USER-PUBLIC-IP-ADDRESS',
        ),
    );

```

```
/* Now, you send information to Pagadito */
$Pagadito = new Pagadito(false);
$res = $Pagadito->sendPayment($params);

/* You may store the information received */
print_r($res);
?>
```

Notes



- To enable “Pay with Tokenized Card” you have to request it to Technical Team of Pagadito, indicating the Merchant Account.
- For this service, payment is only allowed in United States Dollars (USD).

Related Topics

Payment with Tokenization.

APPENDIX List of Parameters of REST API.

APPENDIX List of Returned Values of REST API.

APPENDIX List of HTTP Status Codes of REST API.

APPENDIX List of Response Codes of REST API.

APPENDIX List of ISO 3166 Codes for Countries.

APPENDIX List of ISO Codes for states of the United States.

APPENDIX Credit/Debit Cards for test.

Webhooks.

Subscription with Tokenization

Description

It consists of the processing of payments and scheduling of collections to futures for a Trade without redirection, the merchant asks the user for the data of his Credit / Debit Card and sends them to Pagadito. In addition to the charge to the card, Pagadito generates a token associated with the card, to make future charges using only this token instead of all the card data. This service does not require the user to be redirected to a payment screen, so your website or app is responsible for the entire payment process. Communication with Pagadito is through a REST API.


Use

Ideal for websites or applications that offer subscriptions with defined packages, that is, the user knows the number of payments that will be charged to his account on a periodic basis. With this service, your website or application must request the user's credit/debit card information only once, and the card will be charged on the defined dates.

Steps

1. The user arrives at your website, chooses the products or services to pay and enters the details of his credit / debit card.
2. Tu sitio web envía a Pagadito los datos del pago.
3. Pagadito processes the payment.
4. Pagadito returns payment information including subscription code and credit/debit card token.
5. Your website or app shows a confirmation screen.

Diagram

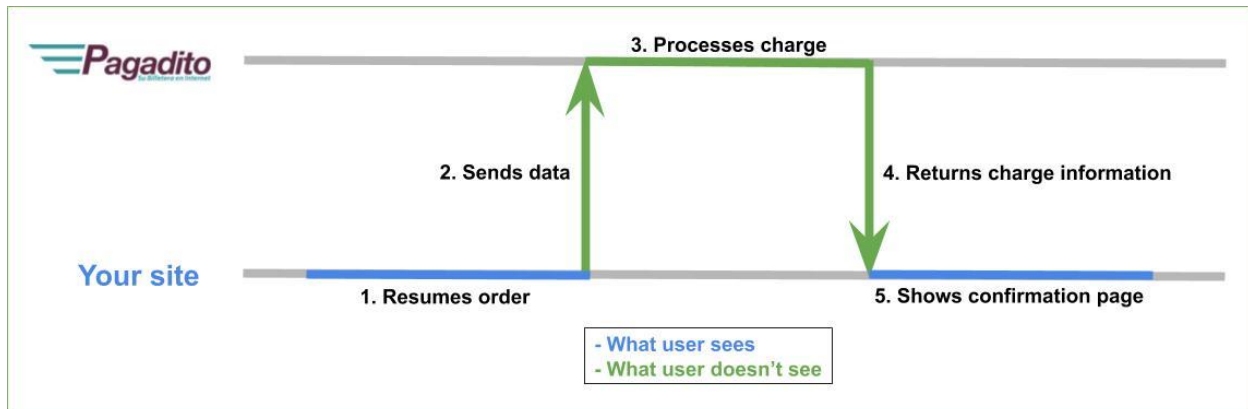

Subscription Process with Tokenization with Pagadito

Code

To connect to the API, your server must support HTTPS connections:

- HTTP/1.1
- TLS 1.2

The request header:

- “Content-Type” must be set to “Application/json;charset=UTF-8”
- “Content-Length” the length in bytes of the request parameters must be set.

Generate Device Fingerprint

Before to send the payment request, you must generate the Device Fingerprint of the user. This value is generated based on his navigation information; for this you must include the library and add an input in your website form or app with the value generated. Pagadito uses in a secure way this information to analyze the risk level of the transaction.

[JAVASCRIPT]

```
<html>
  <head>
    <meta charset="ISO-8859-1">

    <!-- You have to include this library -->
    <script type="text/javascript" src="cybs_devicefingerprint.js">
    </script>
```

```

</head>
<body>
  <script type="text/javascript">
    <!-- Add order and payment inputs -->

    <!-- If your project is live, replace SANDBOX by LIVE -->
    document.write('<input type="hidden" name="deviceFingerprintID"
value="' + cybs_dfprofiler("pagadito", "SANDBOX") + '">');
  </script>
</body>
</html>

```

Send subscription

To submit the collection request, you must submit the merchant's account connection credentials, a charge identifier (ERN), the details of the collection (quantity, description, price), the user's credit/debit card details and navigation data.

[REST API]

Endpoint

- SandBox -> <https://sandbox-api.pagadito.com/v1/subscription/>
- Producción -> <https://api.pagadito.com/v1/subscription/>

Authentication

Authentication to the API is done through HTTP Basic Auth. Provide your UID key as the basic username value and WSK as the Basic authentication password value.

```

/* Copy from Technical Configuration -> Integration Parameters */
Username: USE-YOUR-UID
Password: USE-YOUR-WSK

```

Request

```

{
  "card": {
    "number": "5555555555554444",
    "expirationDate": "12/2030",
    "cvv": "123",
    "cardHolderName": "JONH DOE",

```

```

    "firstName": "John",
    "lastName": "Doe",
    "billingAddress": {
      "city": "Los Angeles",
      "state": "CA",
      "zip": "90011",
      "countryId": "840",
      "line1": "Street 1",
      "phone": "+1 213 7777777"
    },
    "email": "youremail@domain.com"
  },
  "recurring": {
    "interval": "month",
    "interval_count": 3,
    "first_interval_free": false,
    "merchantTransactionId": "SUB-001",
    "description": "Service info or product data",
    "interval_amount": "10.00"
  },
  "browserInfo": {
    "deviceFingerprintID": "1234567890123456",
    "customerIp": "172.217.8.78"
  }
}

```

Response

```

{
  "response_code": "PG200-00",
  "response_message": "Operation successful",
  "request_id": "e44a0e1d8147048830b764f12b73e298",
  "customer_reply": {
    "authorization": "DB3AAD4B",
    "paymentDate": "2020-10-08T14:17:51-06:00",
    "recurring": {
      "amount": "10.00",
      "merchantTransactionId": "SUB-001",
      "period": "Monthly",
      "subscription_code": "sub_hupszv1r8s",
      "client": {
        "firstName": "John",
        "lastName": "Doe",
        "email": "youremail@domain.com"
      }
    }
  },
}

```

```

        "payment_token": "cus_ac1990b0bbd32f7b"
    },
    "request_date": "2020-10-08T14:17:53-06:00"
}

```

[PHP]

keys.inc.php

```

<?php
/* Copy from Technical Configuration -> Integration Parameters */
define("KEY_UID", "CHANGE_ME");
define("KEY_WSK", "CHANGE_ME");

/* If your project is live, uncomment the following line, and comment the next one */
// define("GATEWAY_URL", "https://api.pagadito.com/v1/");
define("GATEWAY_URL", "https://sandbox-api.pagadito.com/v1/");

```

03_subscription.php

```

<?php
require_once 'keys.inc.php';
require_once 'lib/class.pagadito.php';

/* You have to add the recurring information, including the details */
$params = array(
    'card' => array(
        'number'      => '5555555555554444',
        'expirationDate' => '12/2030',
        'cvv'         => '123',
        'cardHolderName' => 'JONH DOE',
        'firstName'    => 'John',
        'lastName'     => 'Doe',
        'billingAddress' => array(
            'city'      => 'Los Angeles',
            'state'     => 'CA',
            'zip'       => '90011',
            'countryId' => '840',
            'line1'     => 'Street 1',
            'phone'     => '+1 213 7777777',
        ),
        'email'        => 'youremail@domain.com',
    ),
    'recurring' => array(
        'interval'      => 'month',
        'interval_count' => '3',
        'first_interval_free' => false,
        'merchantTransactionId' => 'SUB-' . rand(),
        'description'    => 'Service info or product data',
        'interval_amount' => '10.00'
    ),
);

```



```

        'browserInfo' => array(
            'deviceFingerprintID' => '1234567890123456',
            'customerIp'          => '172.217.8.78',
        ),
    );

/* Now, you send information to Pagadito */
$pagadito = new Pagadito(false); //Change true to debug
$res = $pagadito->createSubscription($params);

/* You may store the information received */
print_r($res);
echo "\n";

```

Unsubscribe

To cancel a subscription, you must submit your account credentials and subscription code.

[REST API]

Endpoint

- Sandbox -> <https://sandbox-api.pagadito.com/v1/subscription-cancel/>
- Producción -> <https://api.pagadito.com/v1/subscription-cancel/>

Authentication

Authentication to the API is done through HTTP Basic Auth. Provide your UID key as the basic user name value and WSK as the Basic authentication password value.

```

/* Copy from Technical Configuration -> Integration Parameters */
Username: USE-YOUR-UID
Password: USE-YOUR-WSK

```

Request

```

{
    "subscription_code": "sub_kvr8m5bw9q"
}

```

Response

```

{
    "response_code": "PG200-00",
}

```

```

    "response_message": "Operation successful",
    "request_id": "7ca516ff2d11c10b5f5e87e436e6984e",
    "subscription_code": "sub_kv8m5bw9q",
    "request_date": "2020-10-08T08:58:36-06:00"
}

```

[PHP]

```

keys.inc.php
<?php
/* Copy from Technical Configuration -> Integration Parameters */
define("KEY_UID", "CHANGE_ME");
define("KEY_WSK", "CHANGE_ME");

/* If your project is live, uncomment the following line, and comment the next one */
// define("GATEWAY_URL", "https://api.pagadito.com/v1/");
define("GATEWAY_URL", "https://sandbox-api.pagadito.com/v1/");

05_subscription_cancel.php
<?php
require_once 'keys.inc.php';
require_once 'lib/class.pagadito.php';

/* You have to add the subscription code */
$params = array(
    'subscription_code' => 'sub_21pic17ja4'
);

/* Now, you send information to Pagadito */
$pagadito = new Pagadito(false); //Change true to debug
$res = $pagadito->cancelSubscription($params);

/* You may store the information received */
print_r($res);
echo "\n";

```

Notes



- The authorization of "Subscription with Tokenization" must be requested to the Technical Team of Pagadito, indicating which is the account of the Merchant.
- For this service, only the collection in American Dollar (USD) is allowed.

Related topics

Payment with Tokenization.

Payment by Tokenized Card.

Tokenized Card Subscription.

APPENDIX List of Parameters of REST API.

APPENDIX List of Returned Values of REST API.

APPENDIX List of HTTP Status Codes of REST API.

APPENDIX List of Response Codes of REST API.

APPENDIX List of ISO 3166 Codes for Countries.

APPENDIX List of ISO Codes for states of the United States.

APPENDIX Credit/Debit Cards for test.

Webhooks.

Tokenized Card Subscription

Description

It consists of the processing of payments and scheduling of collections to futures for a Commerce without redirection, using the token of a credit / debit card previously processed and tokenized. This service does not require the user to be redirected to a payment screen, so your website or app is responsible for the entire payment process. Communication with Pagadito is through a REST API.


Use

Ideal for websites or apps that offer scalable subscriptions or renewal of a completed subscription. With this service, your website or application will be able to send new charges without the need for the user to be present or for them to re-enter their credit/debit card details.

Steps

1. The user arrives at your website, chooses the products or services to pay and enters the details of his credit / debit card.
2. Your website sends Pagadito payment details.
3. Pagadito processes the payment.
4. Pagadito returns payment information including subscription code and credit/debit card token.
5. Your website or app shows a confirmation screen.

Diagram

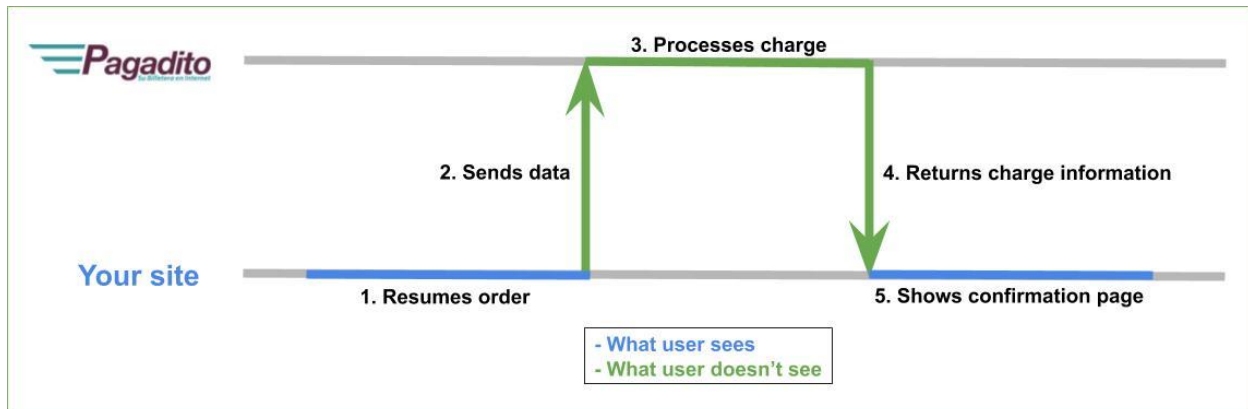

Subscription Process with Tokenized Card with Pagadito

Code

To connect to the API, your server must support HTTPS connections:

- HTTP/1.1
- TLS 1.2

The request header:

- “Content-Type” must be set to “Application/json;charset=UTF-8”
- “Content-Length” the length in bytes of the request parameters must be set.

Generate Device Fingerprint

Before to send the payment request, you must generate the Device Fingerprint of the user. This value is generated based on his navigation information; for this you must include the library and add an input in your website form or app with the value generated. Pagadito uses in a secure way this information to analyze the risk level of the transaction.

[JAVASCRIPT]

```
<html>
  <head>
    <meta charset="ISO-8859-1">

    <!-- You have to include this library -->
    <script type="text/javascript" src="cybs_devicefingerprint.js">
    </script>
```

```

</head>
<body>
  <script type="text/javascript">
    <!-- Add order and payment inputs -->

    <!-- If your project is live, replace SANDBOX by LIVE -->
    document.write('<input type="hidden" name="deviceFingerprintID"
value="' + cybs_dfprofiler("pagadito", "SANDBOX") + '">');
  </script>
</body>
</html>

```

Send subscription

To submit the payment request, you must submit the merchant account connection credentials, a charge identifier (ERN), the details of the collection (quantity, description, price), the user's card token and navigation data.

[REST API]

Endpoint

- SandBox -> <https://sandbox-api.pagadito.com/v1/subscription-by-token/>
- Producción -> <https://api.pagadito.com/v1/subscription-by-token/>

Authentication

Authentication to the API is done through HTTP Basic Auth. Provide your UID key as the basic username value and WSK as the Basic authentication password value.

```

/* Copy from Technical Configuration -> Integration Parameters */
Username: USE-YOUR-UID
Password: USE-YOUR-WSK

```

Request

```

{
  "payment_token": "cus_ac1990b0bbd32f7b",
  "recurring": {
    "interval": "month",
    "interval_count": 3,
    "first_interval_free": false,

```

```

        "merchantTransactionId": "SUBSCRIPTION-002",
        "description": "Service info or product data",
        "interval_amount": "10.00"
    },
    "browserInfo": {
        "deviceFingerprintID": "1234567890123456",
        "customerIp": "172.217.8.78"
    }
}

```

Response

```

{
    "response_code": "PG200-00",
    "response_message": "Operation successful",
    "request_id": "d52003a9a59ea1727801ed5c6328af94",
    "customer_reply": {
        "authorization": "7DFEC96F",
        "paymentDate": "2020-10-08T17:29:55-06:00",
        "recurring": {
            "amount": "10.00",
            "merchantTransactionId": "SUBSCRIPTION-002",
            "period": "Monthly",
            "subscription_code": "sub_m7segc9u83",
            "client": {
                "firstName": "John",
                "lastName": "Doe",
                "email": "youremail@domain.com"
            }
        },
        "payment_token": "cus_ac1990b0bbd32f7b"
    },
    "request_date": "2020-10-08T17:29:57-06:00"
}

```

[PHP]

```

keys.inc.php
<?php
/* Copy from Technical Configuration -> Integration Parameters */
define("KEY_UID", "CHANGE_ME");
define("KEY_WSK", "CHANGE_ME");

/* If your project is live, uncomment the following line, and comment the next one */
// define("GATEWAY_URL", "https://api.pagadito.com/v1/");

```

```

define("GATEWAY_URL", "https://sandbox-api.pagadito.com/v1/");

04_subscription_by_token.php
<?php
require_once 'keys.inc.php';
require_once 'lib/class.pagadito.php';

/* You have to add the recurring information, including the details */
$params = array(
    'payment_token' => 'cus_ac1990b0bbd32f7b',
    'recurring' => array(
        'interval' => 'month',
        'interval_count' => '3',
        'first_interval_free' => false,
        'merchantTransactionId' => 'SUB-' . rand(),
        'description' => 'Service info or product data',
        'interval_amount' => '10.00'
    ),
    'browserInfo' => array(
        'deviceFingerprintID' => '1234567890123456',
        'customerIp' => '172.217.8.78',
    ),
);

/* Now, you send information to Pagadito */
$pagadito = new Pagadito(false); //Change true to debug
$res = $pagadito->createSubscription($params);

/* You may store the information received */
print_r($res);
echo "\n";

```

Unsubscribe

To cancel a subscription, you must submit your account credentials and subscription code.

[REST API]

Endpoint

- Sandbox -> <https://sandbox-api.pagadito.com/v1/subscription-cancel/>
- Producción -> <https://api.pagadito.com/v1/subscription-cancel/>

Autenticación

Authentication to the API is done through HTTP Basic Auth. Provide your UID key as the basic user name value and WSK as the Basic authentication password value.

```
/* Copy from Technical Configuration -> Integration Parameters */
Username: USE-YOUR-UID
Password: USE-YOUR-WSK
```

Request

```
{
  "subscription_code": "sub_kvr8m5bw9q"
}
```

Response

```
{
  "response_code": "PG200-00",
  "response_message": "Operation successful",
  "request_id": "7ca516ff2d11c10b5f5e87e436e6984e",
  "subscription_code": "sub_kvr8m5bw9q",
  "request_date": "2020-10-08T08:58:36-06:00"
}
```

[PHP]

```
keys.inc.php
<?php
/* Copy from Technical Configuration -> Integration Parameters */
define("KEY_UID", "CHANGE_ME");
define("KEY_WSK", "CHANGE_ME");

/* If your project is live, uncomment the following line, and comment the next one */
// define("GATEWAY_URL", "https://api.pagadito.com/v1/");
define("GATEWAY_URL", "https://sandbox-api.pagadito.com/v1/");

05_subscription_cancel.php
<?php
require_once 'keys.inc.php';
require_once 'lib/class.pagadito.php';

/* You have to add the subscription code */
$params = array(
  'subscription_code' => 'sub_21pic17ja4'
);
```

```
/* Now, you send information to Pagadito */
$pagadito = new Pagadito(false); //Change true to debug
$res = $pagadito->cancelSubscription($params);

/* You may store the information received */
print_r($res);
echo "\n";
```

Notes



- The authorization of "Subscription with Tokenization" must be requested to the Technical Team of Pagadito, indicating which is the account of the Merchant.
- For this service, only the collection in American Dollar (USD) is allowed.

Related topics

Payment with Tokenization.

Payment by Tokenized Card.

Subscription with Tokenization.

APPENDIX List of Parameters of REST API.

APPENDIX List of Returned Values of REST API.

APPENDIX List of HTTP Status Codes of REST API.

APPENDIX List of Response Codes of REST API.

APPENDIX List of ISO 3166 Codes for Countries.

APPENDIX List of ISO Codes for states of the United States.

APPENDIX Credit/Debit Cards for test.

Webhooks.

Refund

Description

It consists of the return of a payment already processed by the merchant and that have generated an approval of the transaction. Communication with Pagadito is through a REST API.


Use

Ideal for merchants that have established within their terms or conditions of use, that they will not be charged for associating cards within their platform or to return the amount of a transaction to the client. With this service, your website or application will be able to request refunds without having to access your Pagadito Comercio account.

Steps

1. Your app submits to the refund request with the approval number.
2. Pagadito processes the refund.
3. Pagadito returns the payment information including the transaction approval number and the negative amount.
4. Your website or app shows a confirmation screen.

Diagram

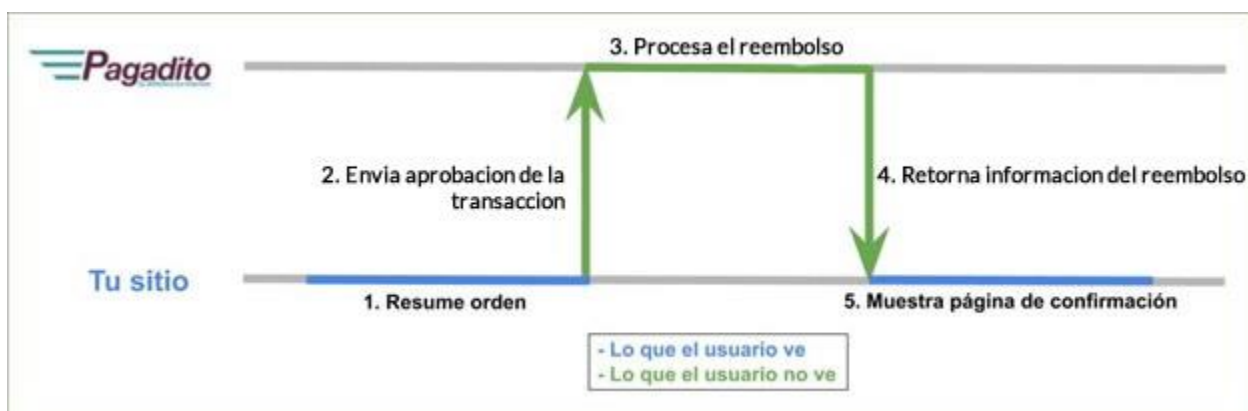

Refund Process with Pagadito

Code

To connect to the API, your server must support HTTPS connections:

- HTTP/1.1
- TLS 1.2

The request header:

- “Content-Type” should be set to “Application/json;charset=UTF-8”
- “Content-Length” the length in bytes of the request parameters must be set.

Refund Payment

To refund payments, you must submit your account credentials and subscription code.

[REST API]

Endpoint

- SandBox -> <https://sandbox-api.pagadito.com/v1/refund/>
- Producción -> <https://api.pagadito.com/v1/refund/>

Authentication

Authentication to the API is done through HTTP Basic Auth. provide your uid key as the basic user name value and wsk as the basic authentication password value.

```
/* Copy from Technical Configuration -> Integration Parameters */  
Username: USE-YOUR-UID  
Password: USE-YOUR-WSK
```

Petition

```
{  
  "authorization": "EEB20041",  
  "reason": "Refund payment"  
}
```

Answer

```
{
  "response_code": "PG200-00",
  "response_message": "Operation successful",
  "request_id": "f18509aca14c02c907ffbe908fc61b42",
  "amount": "-10.00",
  "authorization": "EEB20041",
  "request_date": "2020-10-08T09:00:40-06:00"
}
```

[PHP]

keys.inc.php

```
<?php
/* Copy from Technical Configuration -> Integration Parameters */
define("KEY_UID", "CHANGE_ME");
define("KEY_WSK", "CHANGE_ME");

/* If your project is live, uncomment the following line, and comment the next one */
// define("GATEWAY_URL", "https://api.pagadito.com/v1/");
define("GATEWAY_URL", "https://sandbox-api.pagadito.com/v1/");
```

refund.php

```
<?php
require_once 'keys.inc.php';
require_once 'lib/class.pagadito.php';

/* You have to add the subscription code */
$params = array(
    'authorization' => '4F5AA50C',
    'reason'         => 'Refund payment'
);

/* Now, you send information to Pagadito */
$pagadito = new Pagadito(false); //Change true to debug
$res = $pagadito->sendRefund($params);

/* You may store the information received */
print_r($res);
echo "\n";
```

Notes



- The authorization of "Refund" must be requested from the Technical Team of Pagadito, indicating which is the account of the Commerce.

Related topics

ANNEX List of REST API HTTP Status Codes.

ANEXO List of REST API Response Codes.

Webhooks

Description

Webhooks are HTTP callbacks that receive notifications for the event types which are configured. They are asynchronous, the order is not guaranteed and when they are sent more than one time the result does not change.

Use

Ideal for websites or apps that need an asynchronous confirmation when the status of a transaction change. With this service, your website or app will not be without knowing the last status per each transaction.

Configuration

From section Technical Configuration -> Webhooks, you have to add the listener URL and save the configuration.

Events

They are notifications that are sent to the configured URL, when a trigger is activated, for example the change of status of a payment. When an event occurs, Pagadito notifies through a POST HTTP request, which contains the details of the event and the information of the transaction.

Types

The types of events are the different triggers that activate the sending of a notification. The supported types of events in this moment are the following:

- **TRANSACTION.STATUS.CHANGE:** This event is triggered when a payment is registered. Also when it changes its status to completed, verifying, revoked or expired.

Information

When an event occurred, Pagadito sends the notification of the event in format JSON encode. If the website or app is not available or it takes too long to answer (timeout), Pagadito cancels the request and tries again until a maximum of 20 times during the following 3 days. The parameter *event_type* indicates the trigger of the event.

```
{
  "id": "0b918943df0962bc7a1824c0555a389347b4febd7cf9d1254406d80ce44e3f9",
  "event_create_timestamp": "2019-07-30 14:13:39",
  "event_type": "TRANSACTION.STATUS.CHANGE",
  "resource": {
    "token": "afd7b5af626e37abf008840acfc82daa",
    "ern": "INV 001-002",
    "create_timestamp": "2019-07-30 14:12:35",
    "amount": {
      "total": "70.00",
      "currency": "USD"
    },
  },
  "description": "Pago de prueba",
  "update_timestamp": "2019-07-30 14:13:35",
  "status": "COMPLETED",
  "reference": "C6CA443B",
  "items_list": [
    {
      "quantity": "1",
      "price": "40.00",
      "description": "Pair of Red Shoes Size 8",
      "url_product": ""
    },
    {
      "quantity": "1",
      "price": "30.00",
      "description": "Pair of Blue Jeans Size 32",
      "url_product": ""
    }
  ]
}
```


Signature

Each one of the sent messages are signed. It is important to verify that:

- The Webhook event was originated from Pagadito.
- The Webhook event was not modified during its transmission.
- The Webhook event goes to the right receiver.

The following headers are used to give information for validation of the signature.

- PAGADITO-SIGNATURE: asymmetric signature generated by Pagadito Base64 encoded.
- PAGADITO-AUTH-ALGO: algorithm used to generate and validate the asymmetric signature.
- PAGADITO-CERT-URL: URL address to download the certificate of public key X509 to be used in the verification process.

The signature is generated through the concatenation of five values, using | (vertical line) as separator.:

- Notification ID: Unique identifier of the HTTP notification. It is contained in the header PAGADITO-NOTIFICATION-ID.
- Timestamp Notification: Timestamp of the HTTP notification. It is contained in the header PAGADITO-NOTIFICATION-TIMESTAMP.
- Event ID: Identifier of the event. It is included in the event's body.
- Cyclic Redundancy Check (CRC32): Checksum CRC32 for the body of the HTTP request.
- WSK: Connection credential of the Merchant Account.

The input string to validate the signature would have the following shape:

```
NotificationId|TimestampNotification|EventId|CRC32|WSK
```

The authentication algorithm specified in PAGADITO-AUTH-ALGO uses an asymmetric signature algorithm. This allows to Pagadito to use a private key to create the signature

in PAGADITO-SIGNATURE, and allows you to use a public key contained in the certificate which source is defined in PAGADITO-CERT-URL to verify the Webhook event.

Code

Read and verify webhook

To validate the webhook notification you have to get the headers of the notification, the certificate and to validate the signature of the message.

[PHP]

```
<?php
/* Get headers */
$headers = getallheaders();
$notification_id = $headers['PAGADITO-NOTIFICATION-ID'];
$notification_timestamp = $headers['PAGADITO-NOTIFICATION-TIMESTAMP'];
$auth_algo = $headers['PAGADITO-AUTH-ALGO'];
$cert_url = $headers['PAGADITO-CERT-URL'];
$notification_signature = base64_decode($headers['PAGADITO-SIGNATURE']);

/* Get data */
$data = file_get_contents('php://input');

/* Get Event ID */
$array_data = json_decode($data, TRUE);
$event_id = $array_data['id'];

/* Copy from Technical Configuration -> Integration Parameters */
$wsk = 'SET-YOUR-WSK';

/* Generate validation string */
$data_signed = $notification_id . '|' . $notification_timestamp . '|' .
$event_id . '|' . crc32($data) . '|' . $wsk;

/* Get content of certificate */
$http_options = array(
    'http' => array(
        'protocol_version' => '1.1',
        'method' => 'GET',
        'header' => array(
```

```

        'Connection: close'
    ),
)
);
$cert_stream_context = stream_context_create($http_options);
$cert_content = file_get_contents($cert_url, FALSE,
$cert_stream_context);

/* Get public key */
$pubkeyid = openssl_pkey_get_public($cert_content);

/* Verify sign */
$verification = openssl_verify($data_signed, $notification_signature,
$pubkeyid, $auth_algo);

/* Free public key */
openssl_free_key($pubkeyid);

/* Validation */
if ($verification == 1) {
    die('Valid');
} elseif ($verification == 0) {
    die('Invalid');
} else {
    die('Error');
}
?>

```

Response

When an app receives the event has to reply with an HTTP status code of level 200. If it responds with a different code, Pagadito will try to give the event until a maximum of 20 times during the following 3 days.

Related Topics

APPENDIX List of Statuses of Transaction.

Appendix

List of Parameters of REST API

Definition of the sent parameters when consuming REST API.

Card Object

Contains card information.

Field Name	Type	Description	Format
number	String (16)	Credit card account number.	1234567890123456
expirationDate	String (7)	Expiration date for the card.	MM/YYYY.
cvv	Number (4)	Card security code.	Three digits for VISA and MasterCard.
cardHolderName	String (26)	Card Holder Name for the card.	Latin characters are not allowed. Some special characters are allowed: - Dot (.) - Hyphen (-) - Apostrophe (') - Single quote (')
firstName	String (30)	First name of the account holder.	Latin characters are allowed. Some special characters are allowed: - Dot (.) - Apostrophe (')
lastName	String (30)	Last name of the account holder.	Latin characters are allowed. Some special characters are allowed: - Dot (.) - Apostrophe (')
email	String (60)	Email for the customer <u>Note:</u> Pagadito sends a confirmation email in each payment	example@example.com

		made.	
--	--	-------	--

billingAddress Object

Contains the billing address of the account holder.

Field Name	Type	Description	Format
city	String (30)	City in the billing address.	Latin characters are allowed. Some special characters are allowed: - Dot (.) - Apostrophe (')
state	String (80)	State or province in the billing address.	Alphanumeric. Latin characters are allowed. Some special characters are allowed: - Parenthesis () - Hyphen (-) - Dot (.) - Apostrophe (') <u>Note:</u> For United States, use the <i>List of ISO State Codes of the United States</i> .
zip	String (15)	Postal code of the billing address.	Numbers. Some special characters are allowed: - Dot (.) - Hyphen (-) Required for United States. If the billing country is United States, the numeric characters are follow these formats: • 5 characters: NNNNN • 9 characters: NNNNN-NNNN
countryId	Number (3)	Country in the billing address.	Use the three numbers country codes located in the appendix <i>List of ISO 3166 Country Codes</i> .
line1	String (60)	Complement the billing address (e.g. street)	Alphanumeric Latin characters are allowed. Special characters allowed:

			- Dot (.) - Comma (,) - Numeral (#) - Semicolon (;) - Hyphen (-) - Degree symbol (°) - Ampersand (&) - Asterik (*)
phone	String (15)	Telephone for the customer. Include the area code	Numbers Some special characters are allowed: - Parenthesis () - Hyphen (-) - Asterik (*)

transaction Object

Contains the information of the transaction to process.

Field Name	Type	Description	Format
merchantTransactionId	String (100)	Merchant-generated order reference or tracking number.	Alphanumeric Latin characters are not allowed. Special characters allowed: - Dot (.) - Hyphen (-)
currencyId	String (3)	Currency in which the payment will be processed. (Future).	3 letter ISO code for currency. Actually only USD

transactionDetails Object

Contains the information of the transaction.

Field Name	Type	Description	Format
quantity	Number (4)	Number of items.	
description	String (100)	Description of the item.	

amount	Decimal (10, 2)	Unit price.	A positive or negative decimal in the currency unit (e.g., 100.00 to charge \$100.00). Negative amount represent a Discount for the customer. Minimum amount 1USD.
--------	--------------------	-------------	---

browserInfo Object

Contains the information of the device where the transaction is made.

Field Name	Type	Description	Format
deviceFingerprintID	Number (40)	Device Fingerprint Generated by the script provided in JavaScript. This information must be from the customer browser.	
customerIp	String (100)	A valid public IP from customer browser.	

Payment Object

Contains the tokenized card token on the first payment.

Field Name	Type	Description	Format
payment_token	String (20)	Payment token associated to the card.	CUS_XXXXXXXXXXXXXXXXXX
transaction	Object	Contains the information of the transaction. The first payment.	

recurring Object

Contains the data of the subscription to be processed.

Field Name	Type	Description	Format
interval	String ()	Subscription frequency.	week, month, year

interval_count	Number ()	Number of subscription charges.	
first_interval_free	Boolean (true, false)	Allows to provide grace period for the subscription.	true: A subscription is scheduled. false: The first payment is charged and the subscription is scheduled.
merchantTransactionId	String (100)	Reference or tracking number generated by the Merchant.	Alphanumeric. Latin alphanumeric characters are not allowed. Special characters allowed: - Dot (.) - Hyphen (-)
description	String (100)	Subscription description.	
interval_amount	Decimal (10, 2)	Amount receivable for each subscription payment.	Minimum amount 1USD.

subscription_code

Contains the code of the subscription to cancel.

Field Name	Type	Description	Format
subscription_code	String ()	Subscription code.	sub_xxxxxxxxxx

refund

Contains the approval number of the transaction to be reimbursed.

Field Name	Type	Description	Format
authorization	String (8)	Contains the approval number of the transaction to be reimbursed.	Alphanumeric.
reason	String ()	Transaction approval.	

List of Returned Values of REST API

Definition of the returned values when consuming REST API.

Group Name	Field Name	Type	Description	Format
pagadito_response	response_code	String (8)	Code of the response See the appendix for Response codes	
	response_message	String	Description of the response code	
	request_date	String	Pagadito Time when the transaction was received.	ISO 8601 date
	request_id	String (32)	Pagadito Token for this transaction	You will receive this only if the transaction passed the validation data.
customer_reply	payment_token	String (8)	Code associated to the Credit Card. Generated by Pagadito in the first payment in the resource /customer	cus_XXXXXXXXXXXXXXX
	authorization	String (8)	Alphanumeric code with the Approval number in Pagadito	
	merchantTransactionId	String (100)	Merchant-generated order reference or tracking number provided in the payment.	

	totalAmount	Decimal	Total amount of the payment that Pagadito charged to the customer	
	firstName	String (60)	First name of the account holder.	
	lastName	String (60)	Last name of the account holder.	
	paymentDate	Date	Pagadito Time when the payment was processed.	ISO 8601 date

List of HTTP Status Codes of REST API

Codes and descriptions of statuses returned when consuming REST API.

Code	Description
200	OK Everything worked out as was meant.
400	Bad request. The request was not acceptable. This may happen when a required parameter is missing.
401	Access not authorized. Incorrect credentials.
402	Request failed. Parameters were correct but the request failed for some reason.
500	Server error. Pagadito had a problem, try again.

List of Response Codes of REST API

Codes and descriptions returned when consuming REST API.

Code	Description
PG200-00	Operation successful
PG400-00	Incomplete data
PG400-01	Field missing or invalid type: [parameter]
PG400-02	Invalid format data for field: [parameter]
PG400-03	Unsoported credit/debit card type. We only support VISA AND MASTERCARD.
PG400-04	The card's expiration is invalid. (month/year)
PG400-05	The card's security code is invalid.
PG400-06	Payments for this country is not supported for Pagadito.
PG400-07	Currency not supported for Pagadito.
PG400-08	The value must be greater than or equal to one - element_ [quantity]
	Invalid format data for field: description element_ [description]
	Invalid format data for field: amount element_ [amount]
PG400-09	Amount is lower than the minimum allowed by Pagadito: \$ 1
PG400-10	Interval amount is greater than the maximum allowed by Pagadito: \$ 50000
PG400-11	Payment token is not valid.
	The card's expiration month is invalid. (month)
PG400-12	The sandbox cards is not allowed in production environment.
PG400-13	Payment token has expired, no further payments will be allowed.
PG402-00	We're sorry. An error has occurred
PG402-01	The transaction cannot completed by risk analyzer
PG402-02	The transaction cannot completed by bank reject

List of ISO 3166 Country Codes

ISO Country Codes allowed in services Payment without Redirection, Payment with Tokenization and Payment with Tokenized Card.

ISO Code	Country
222	El Salvador
320	Guatemala
340	Honduras
558	Nicaragua
188	Costa Rica
591	Panama
840	United States
214	Dominican Republic
170	Colombia
862	Venezuela
218	Ecuador
604	Peru
068	Bolivia
600	Paraguay
858	Uruguay
032	Argentina
152	Chile
484	Mexico
724	Spain
630	Puerto Rico

036	Australia
620	Portugal
124	Canada
276	Germany
040	Austria
056	Belgium
208	Denmark
246	Finland
250	France
372	Ireland
380	Italy
442	Luxembourg
528	Netherlands
616	Poland
826	United Kingdom
752	Sweden
756	Switzerland
578	Norway
076	Brazil
060	Bermuda
084	Belize
534	Sint Maarten
328	Guyana
740	Suriname

608	Philippines
388	Jamaica
158	Taiwan
191	Croatia
646	Rwanda
192	Cuba
780	Trinidad and Tobago
643	Russian Federation
410	Korea
156	China
356	India
376	Israel
392	Japan
634	Qatar
136	Cayman Islands
044	Bahamas

List of ISO State Codes of the United States

ISO Codes of States of the United States allowed in services Payment with Tokenization and Payment with Tokenized Card.

ISO Code	State
AL	Alabama (AL)
AK	Alaska (AK)
AZ	Arizona (AZ)
AR	Arkansas (AR)
CA	California (CA)
CO	Colorado (CO)
CT	Connecticut (CT)
DE	Delaware (DE)
FL	Florida (FL)
GA	Georgia (GA)
HI	Hawaii (HI)
ID	Idaho (ID)
IL	Illinois (IL)
IN	Indiana (IN)
IA	Iowa (IA)
KS	Kansas (KS)
KY	Kentucky (KY)
LA	Louisiana (LA)
ME	Maine (ME)
MD	Maryland (MD)

MA	Massachusetts (MA)
MI	Michigan (MI)
MN	Minnesota (MN)
MS	Mississippi (MS)
MO	Missouri (MO)
MT	Montana (MT)
NE	Nebraska (NE)
NV	Nevada (NV)
NH	New Hampshire (NH)
NJ	New Jersey (NJ)
NM	New Mexico (NM)
NY	New York (NY)
NC	North Carolina (NC)
ND	North Dakota (ND)
OH	Ohio (OH)
OK	Oklahoma (OK)
OR	Oregon (OR)
PA	Pennsylvania (PA)
RI	Rhode Island (RI)
SC	South Carolina (SC)
SD	South Dakota (SD)
TN	Tennessee (TN)
TX	Texas (TX)
UT	Utah (UT)

VT	Vermont (VT)
VA	Virginia (VA)
WA	Washington (WA)
WV	West Virginia (WV)
WI	Wisconsin (WI)
WY	Wyoming (WY)
DC	DC (DC)

Credit/Debit Cards for test

You can use the following credit card for testing Sandbox environment.

Brand	Number	Expiration date	CVV
VISA	4111111111111111 4242424242424242	12/2030	123
MasterCard	5555555555554444 5105105105105100	12/2030	123

Please, do not use this in Production environment.