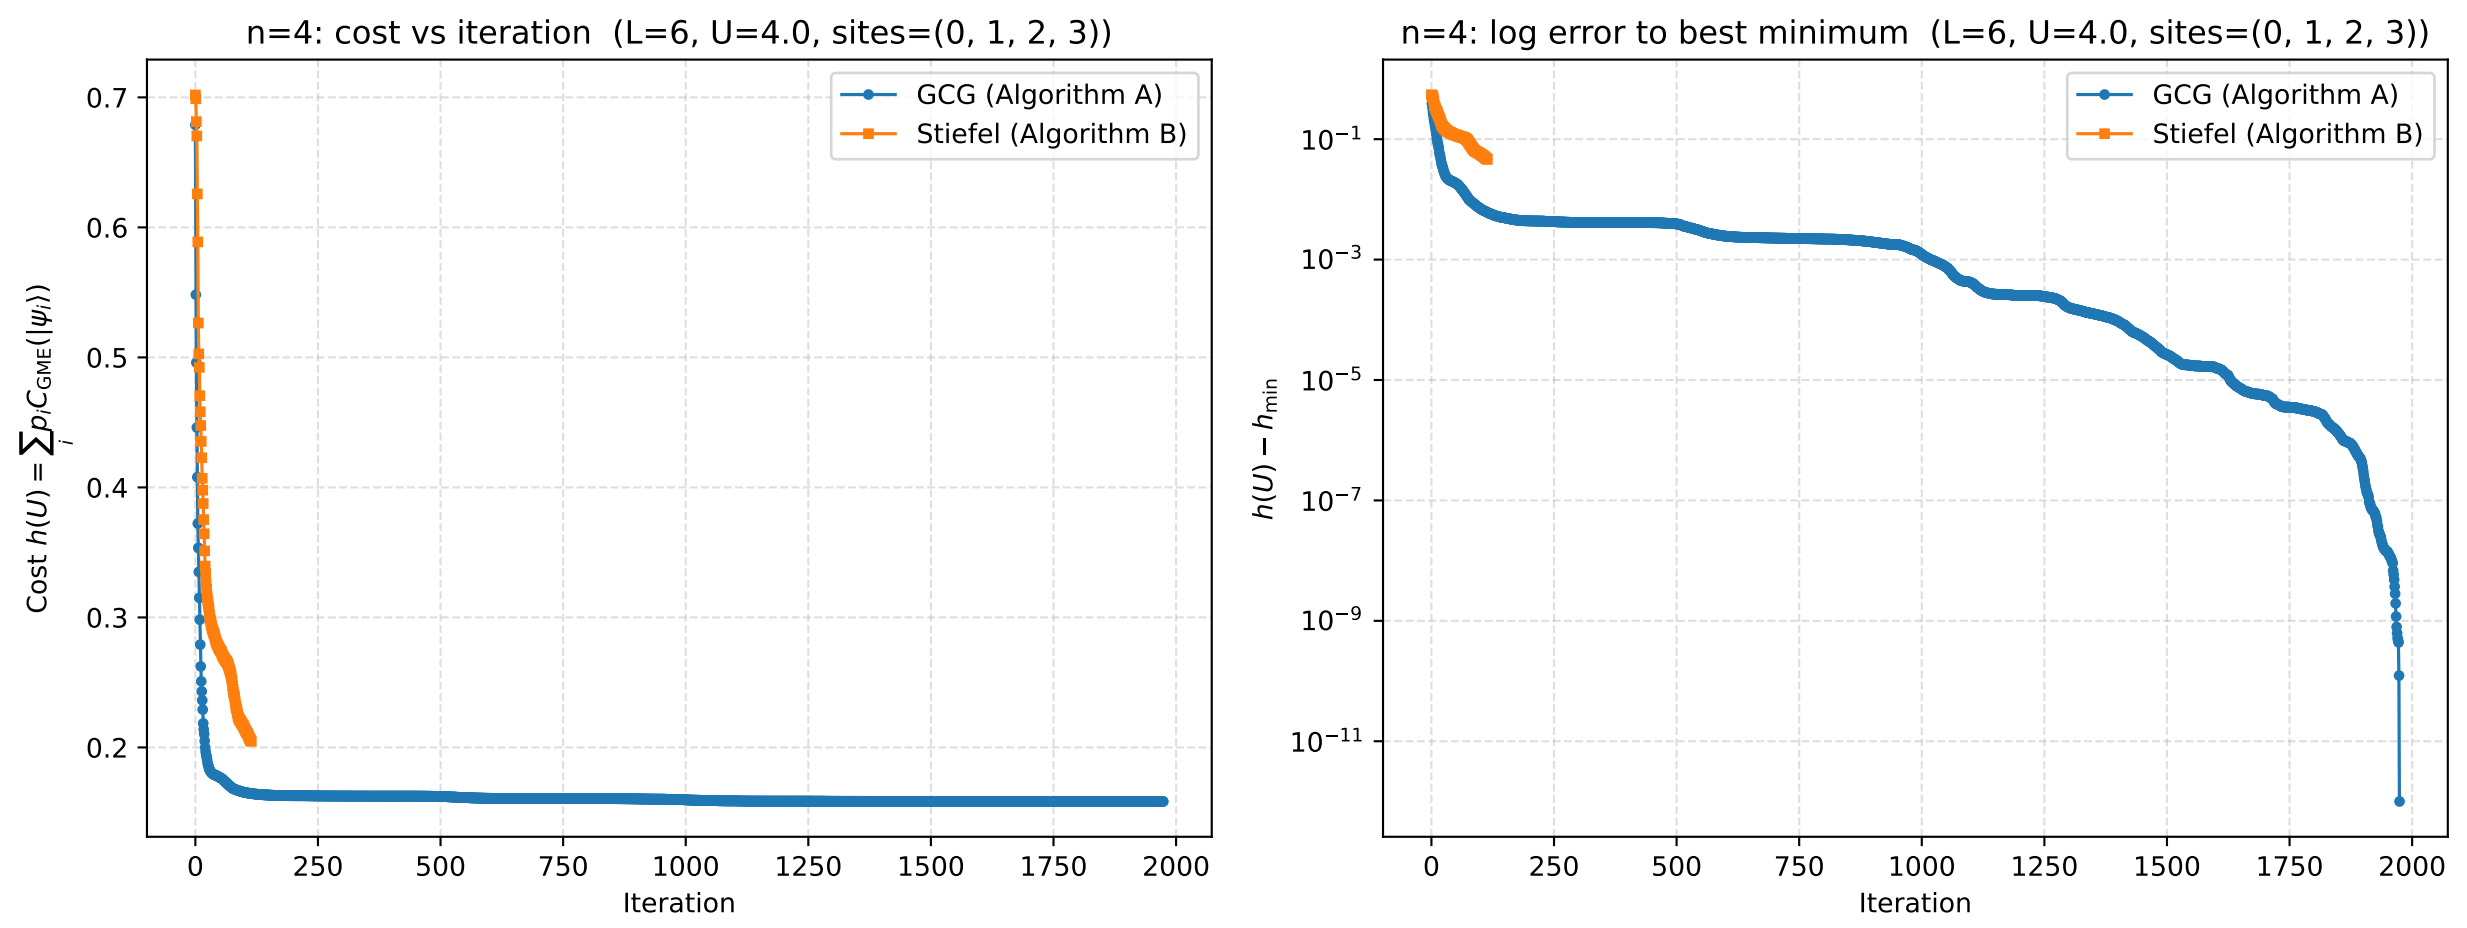

n=4: cost vs iteration (L=6, U=4.0, sites=(0, 1, 2, 3))
GCG (Algorithm A)
Stiefel (Algorithm B)
Cost $h(U) = \sum_i p_i C_{\mathrm{GME}}(|\psi_i\rangle)$
Iteration
n=4: log error to best minimum (L=6, U=4.0, sites=(0, 1, 2, 3))
GCG (Algorithm A)
Stiefel (Algorithm B)
$h(U) - h_{\min}$
Iteration