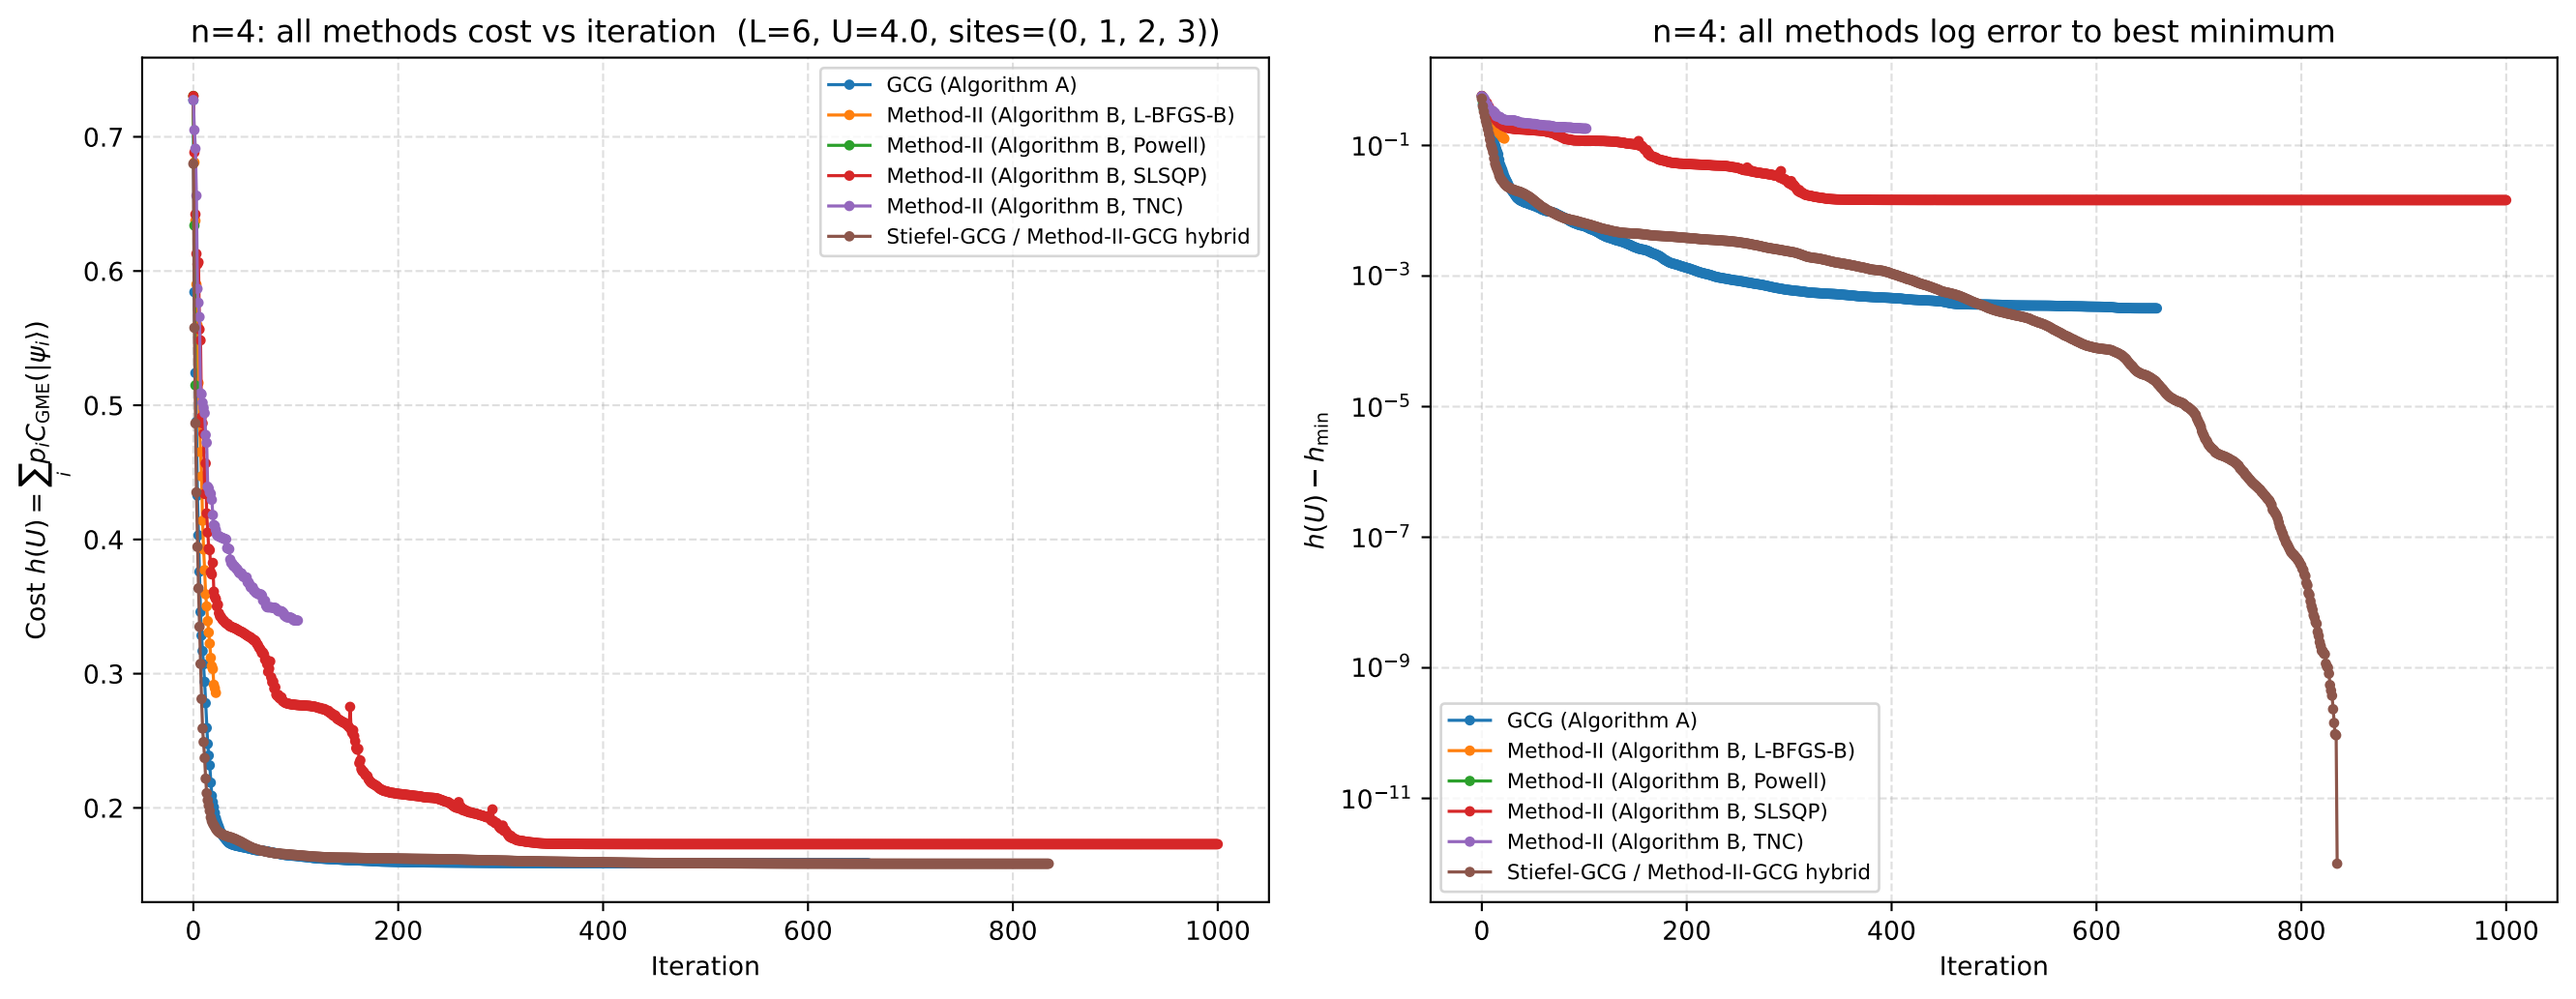

n=4: all methods cost vs iteration (L=6, U=4.0, sites=(0, 1, 2, 3))
Cost $h(U) = \sum_i p_i C_{\mathrm{GME}}(|\psi_i\rangle)$
Iteration
GCG (Algorithm A)
Method-II (Algorithm B, L-BFGS-B)
Method-II (Algorithm B, Powell)
Method-II (Algorithm B, SLSQP)
Method-II (Algorithm B, TNC)
Stiefel-GCG / Method-II-GCG hybrid
n=4: all methods log error to best minimum
$h(U) - h_{\min}$
Iteration
GCG (Algorithm A)
Method-II (Algorithm B, L-BFGS-B)
Method-II (Algorithm B, Powell)
Method-II (Algorithm B, SLSQP)
Method-II (Algorithm B, TNC)
Stiefel-GCG / Method-II-GCG hybrid