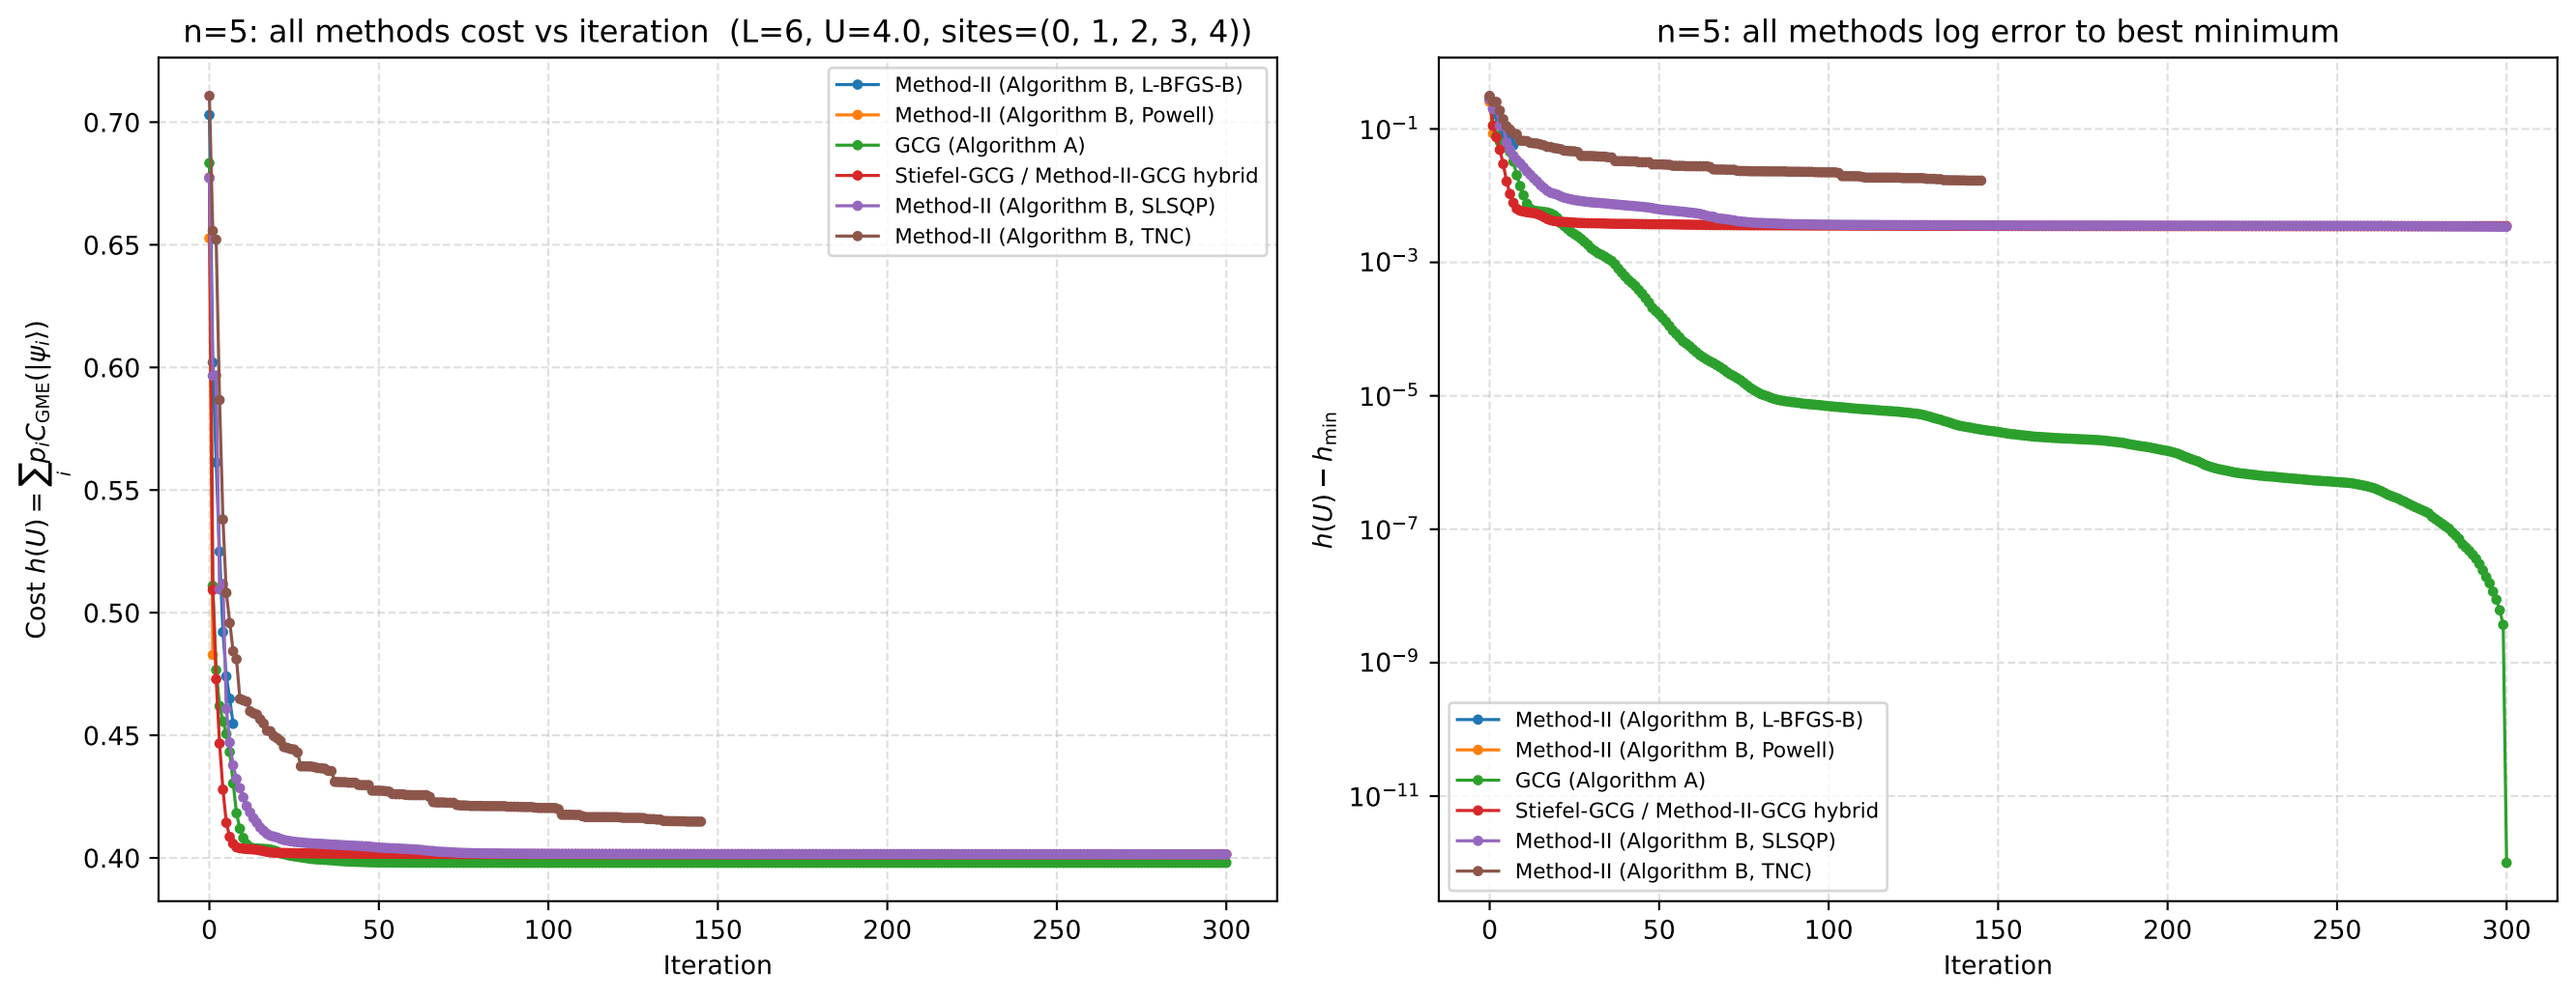
n=5: all methods cost vs iteration (L=6, U=4.0, sites=(0, 1, 2, 3, 4))
Cost $h(U) = \sum_i p_i C_{\mathrm{GME}}(|\psi_i\rangle)$
Iteration
Method-II (Algorithm B, L-BFGS-B)
Method-II (Algorithm B, Powell)
GCG (Algorithm A)
Stiefel-GCG / Method-II-GCG hybrid
Method-II (Algorithm B, SLSQP)
Method-II (Algorithm B, TNC)
n=5: all methods log error to best minimum
$h(U) - h_{\min}$
Iteration
Method-II (Algorithm B, L-BFGS-B)
Method-II (Algorithm B, Powell)
GCG (Algorithm A)
Stiefel-GCG / Method-II-GCG hybrid
Method-II (Algorithm B, SLSQP)
Method-II (Algorithm B, TNC)