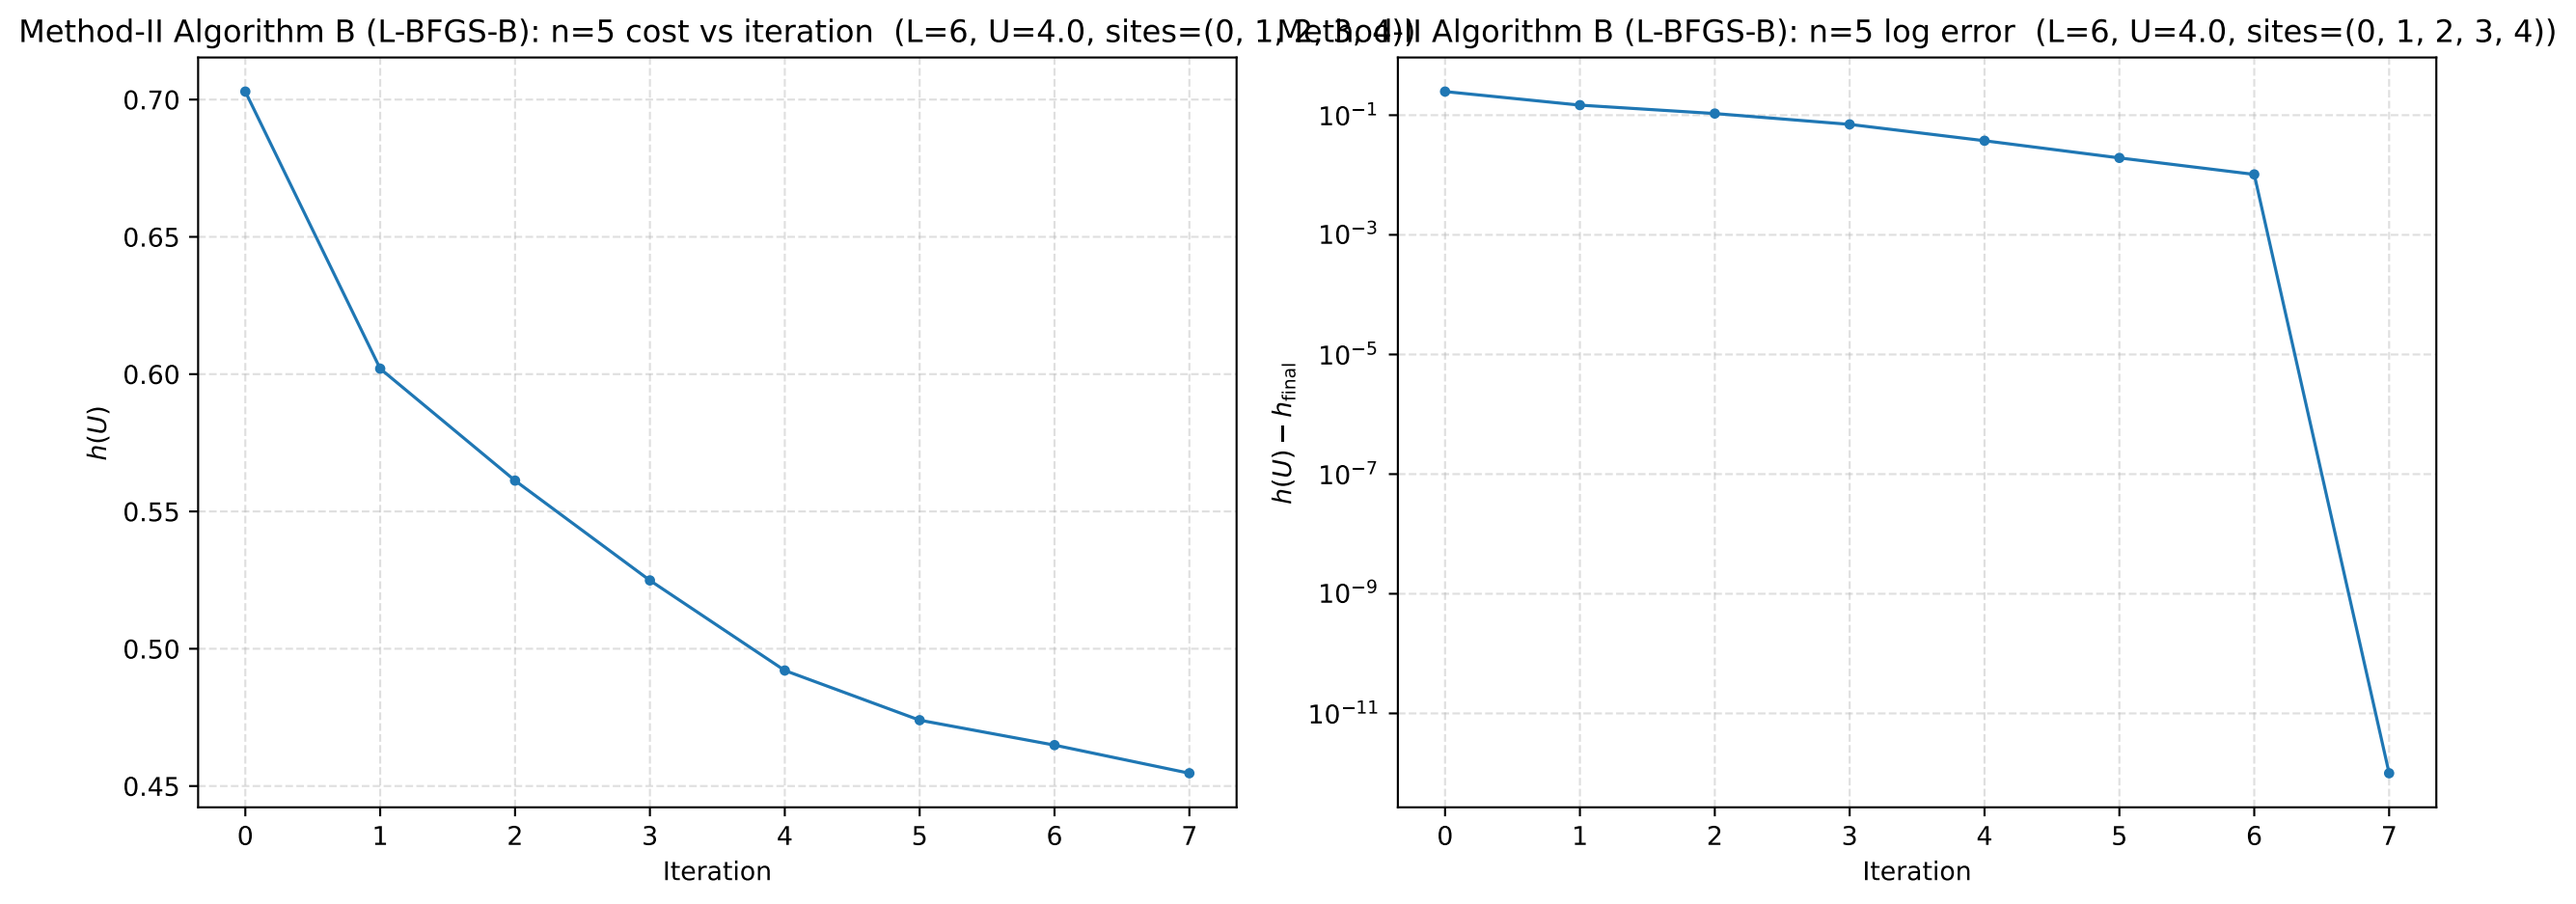
Method-II Algorithm B (L-BFGS-B): n=5 cost vs iteration (L=6, U=4.0, sites=(0, 1, 2, 3, 4))
h(U)
Iteration
Method-II Algorithm B (L-BFGS-B): n=5 log error (L=6, U=4.0, sites=(0, 1, 2, 3, 4))
h(U) − h_final
Iteration