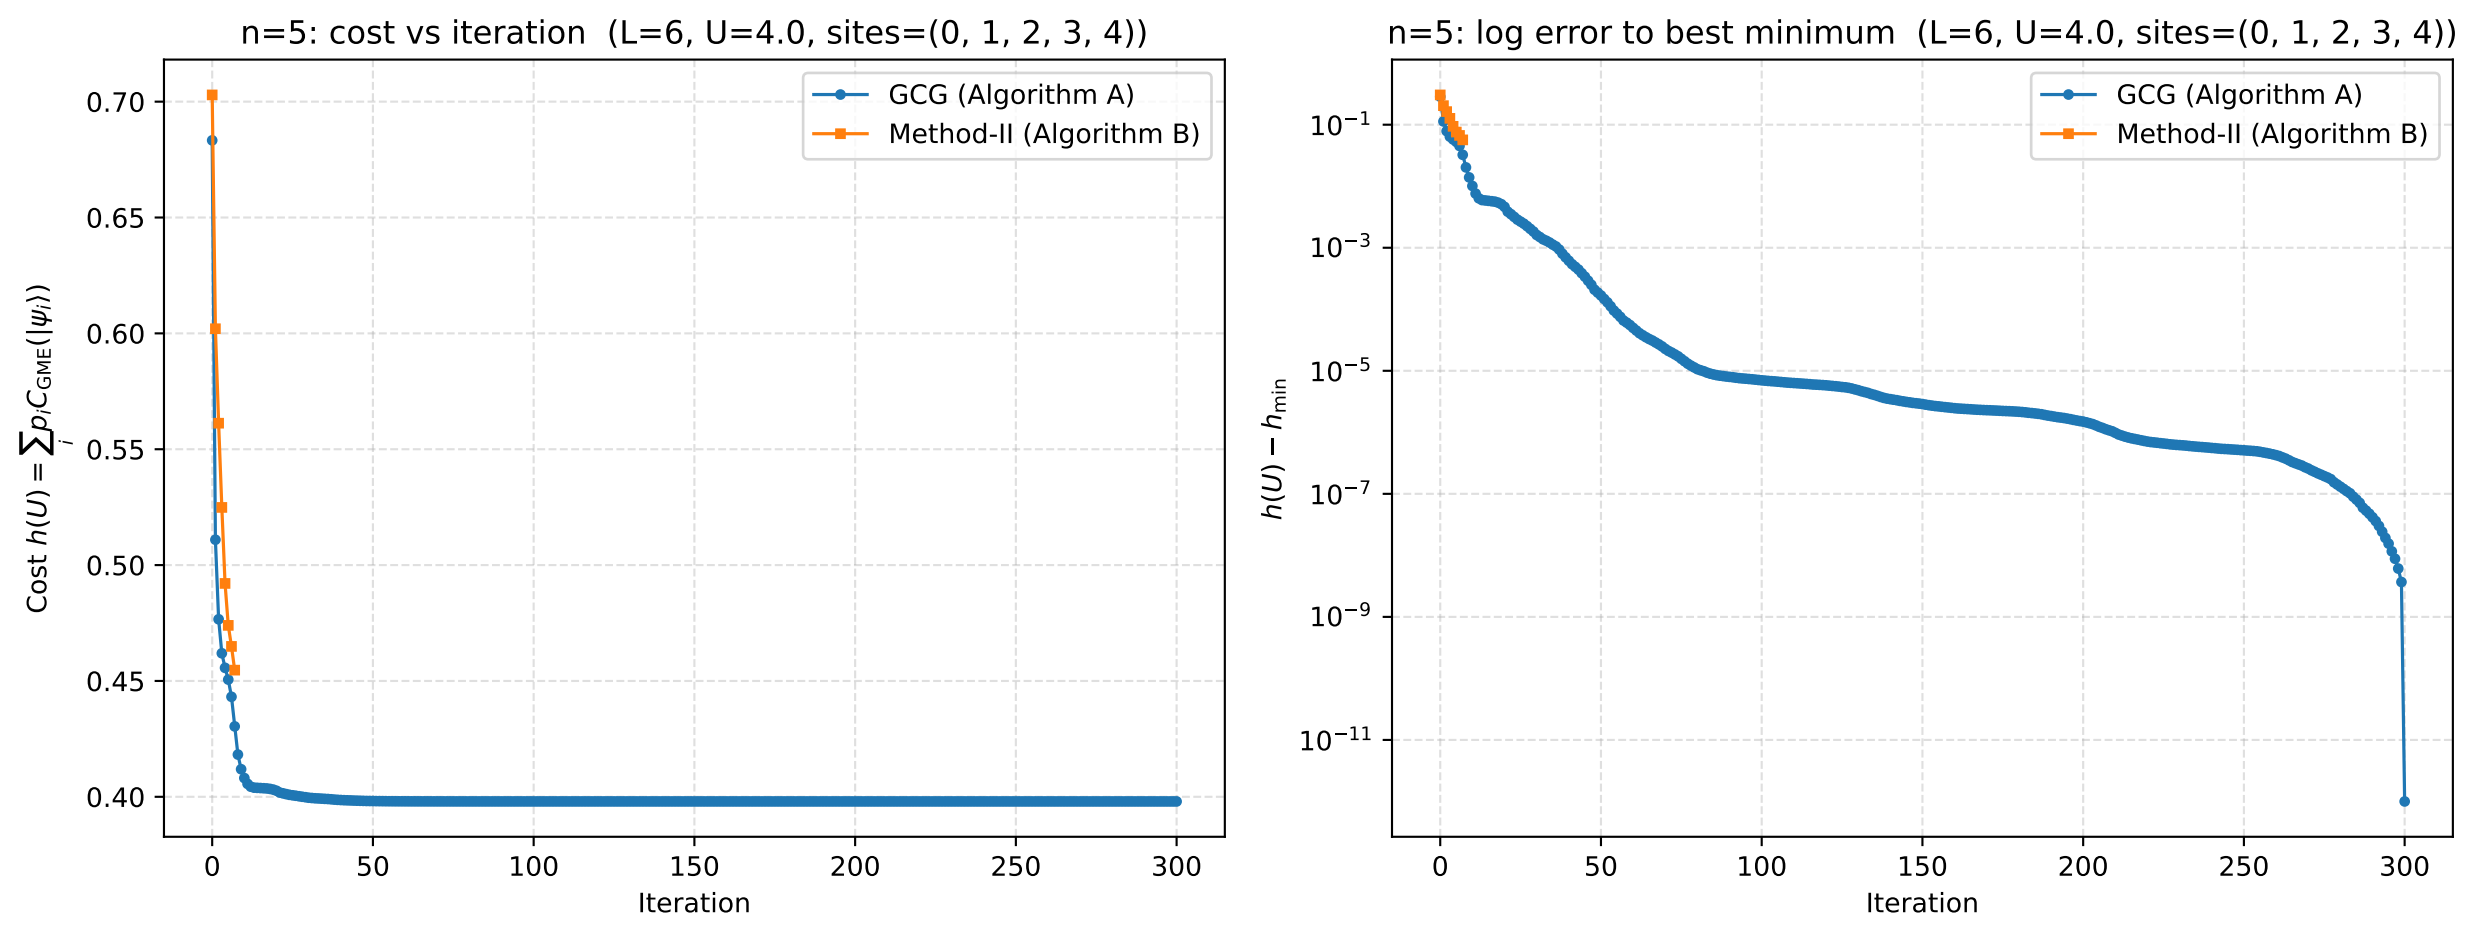
n=5: cost vs iteration (L=6, U=4.0, sites=(0, 1, 2, 3, 4))
GCG (Algorithm A)
Method-II (Algorithm B)
Cost $h(U) = \sum_i p_i C_{\mathrm{GME}}(|\psi_i\rangle)$
Iteration
n=5: log error to best minimum (L=6, U=4.0, sites=(0, 1, 2, 3, 4))
GCG (Algorithm A)
Method-II (Algorithm B)
$h(U) - h_{\min}$
Iteration