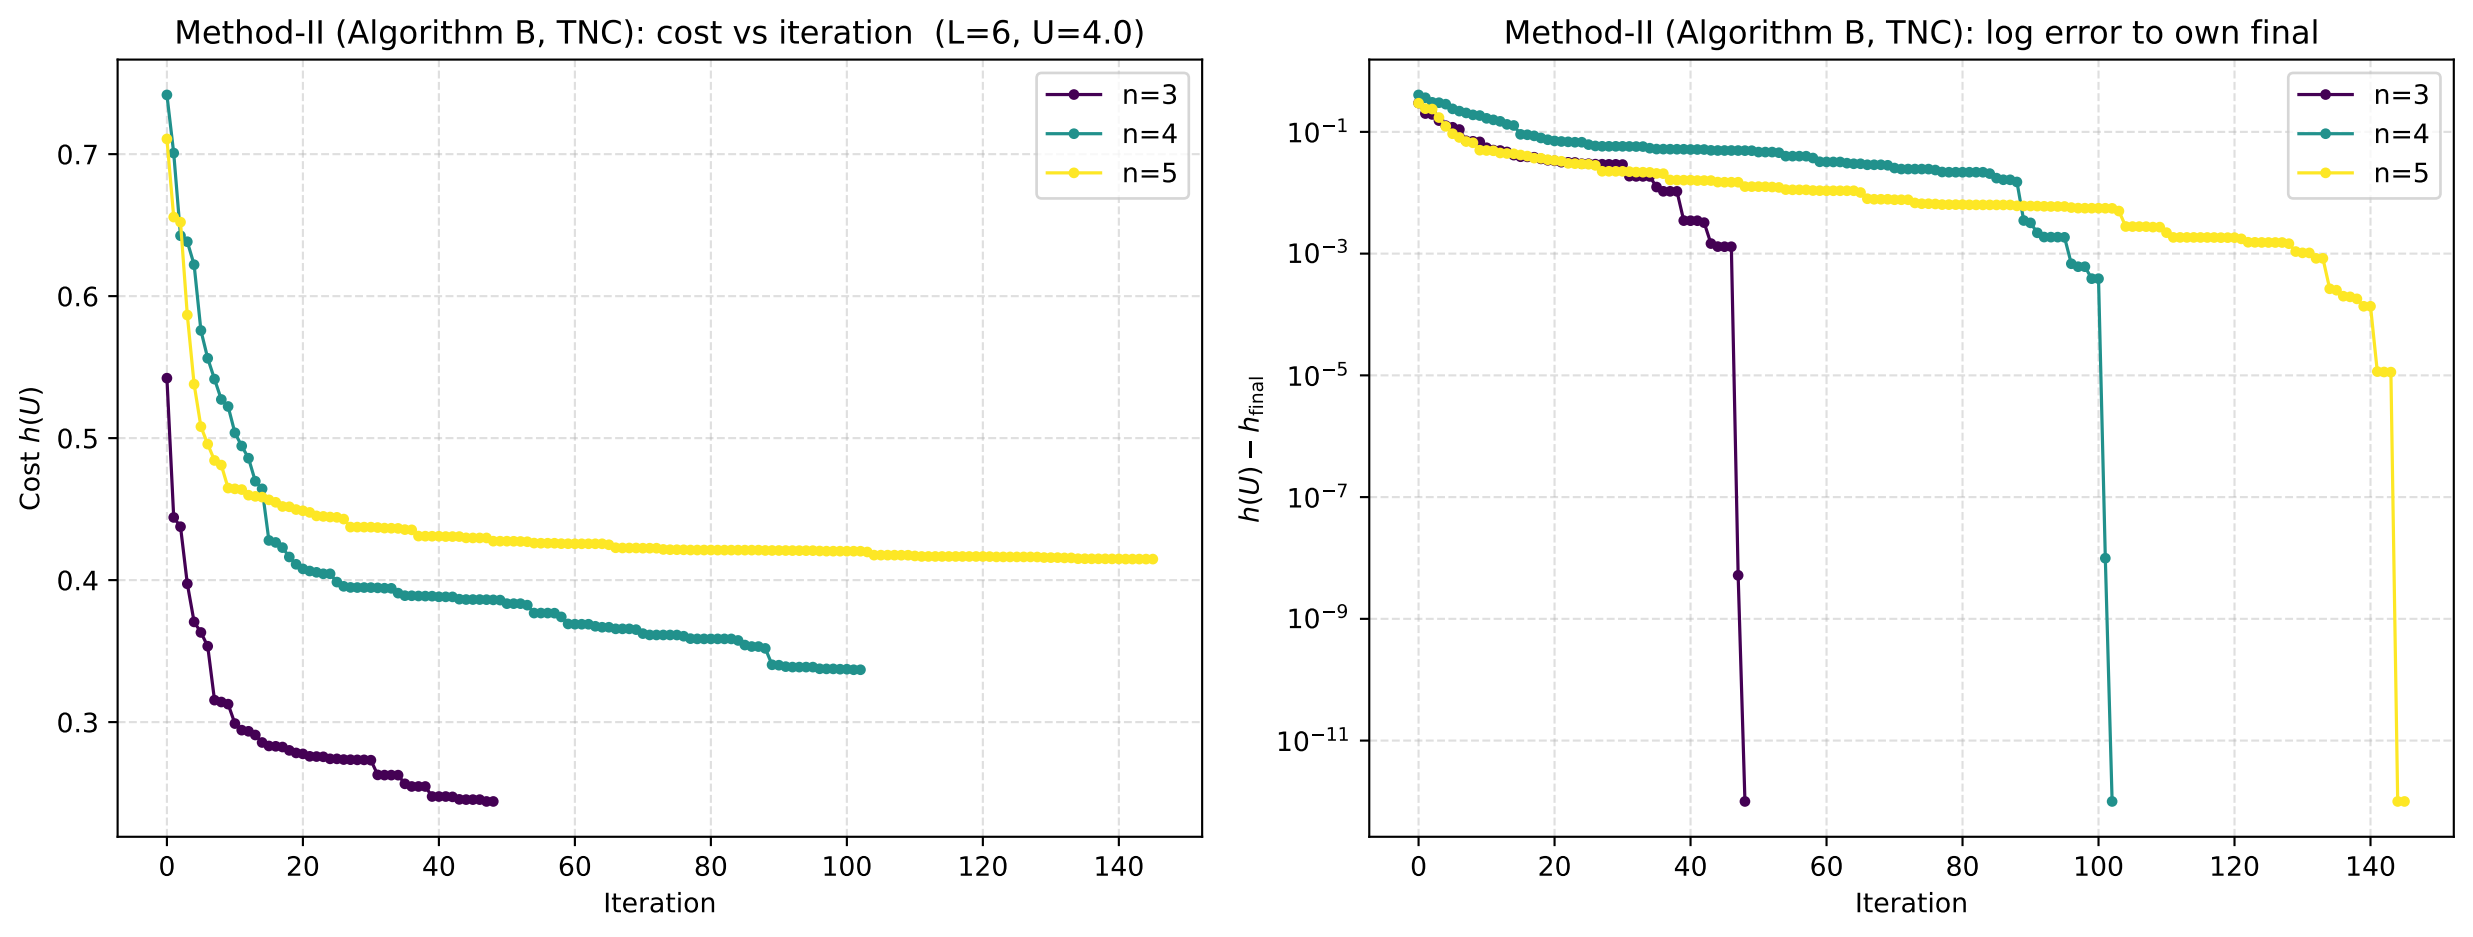
Method-II (Algorithm B, TNC): cost vs iteration (L=6, U=4.0)
Cost $h(U)$
Iteration
n=3
n=4
n=5
Method-II (Algorithm B, TNC): log error to own final
$h(U) - h_{\text{final}}$
Iteration
n=3
n=4
n=5