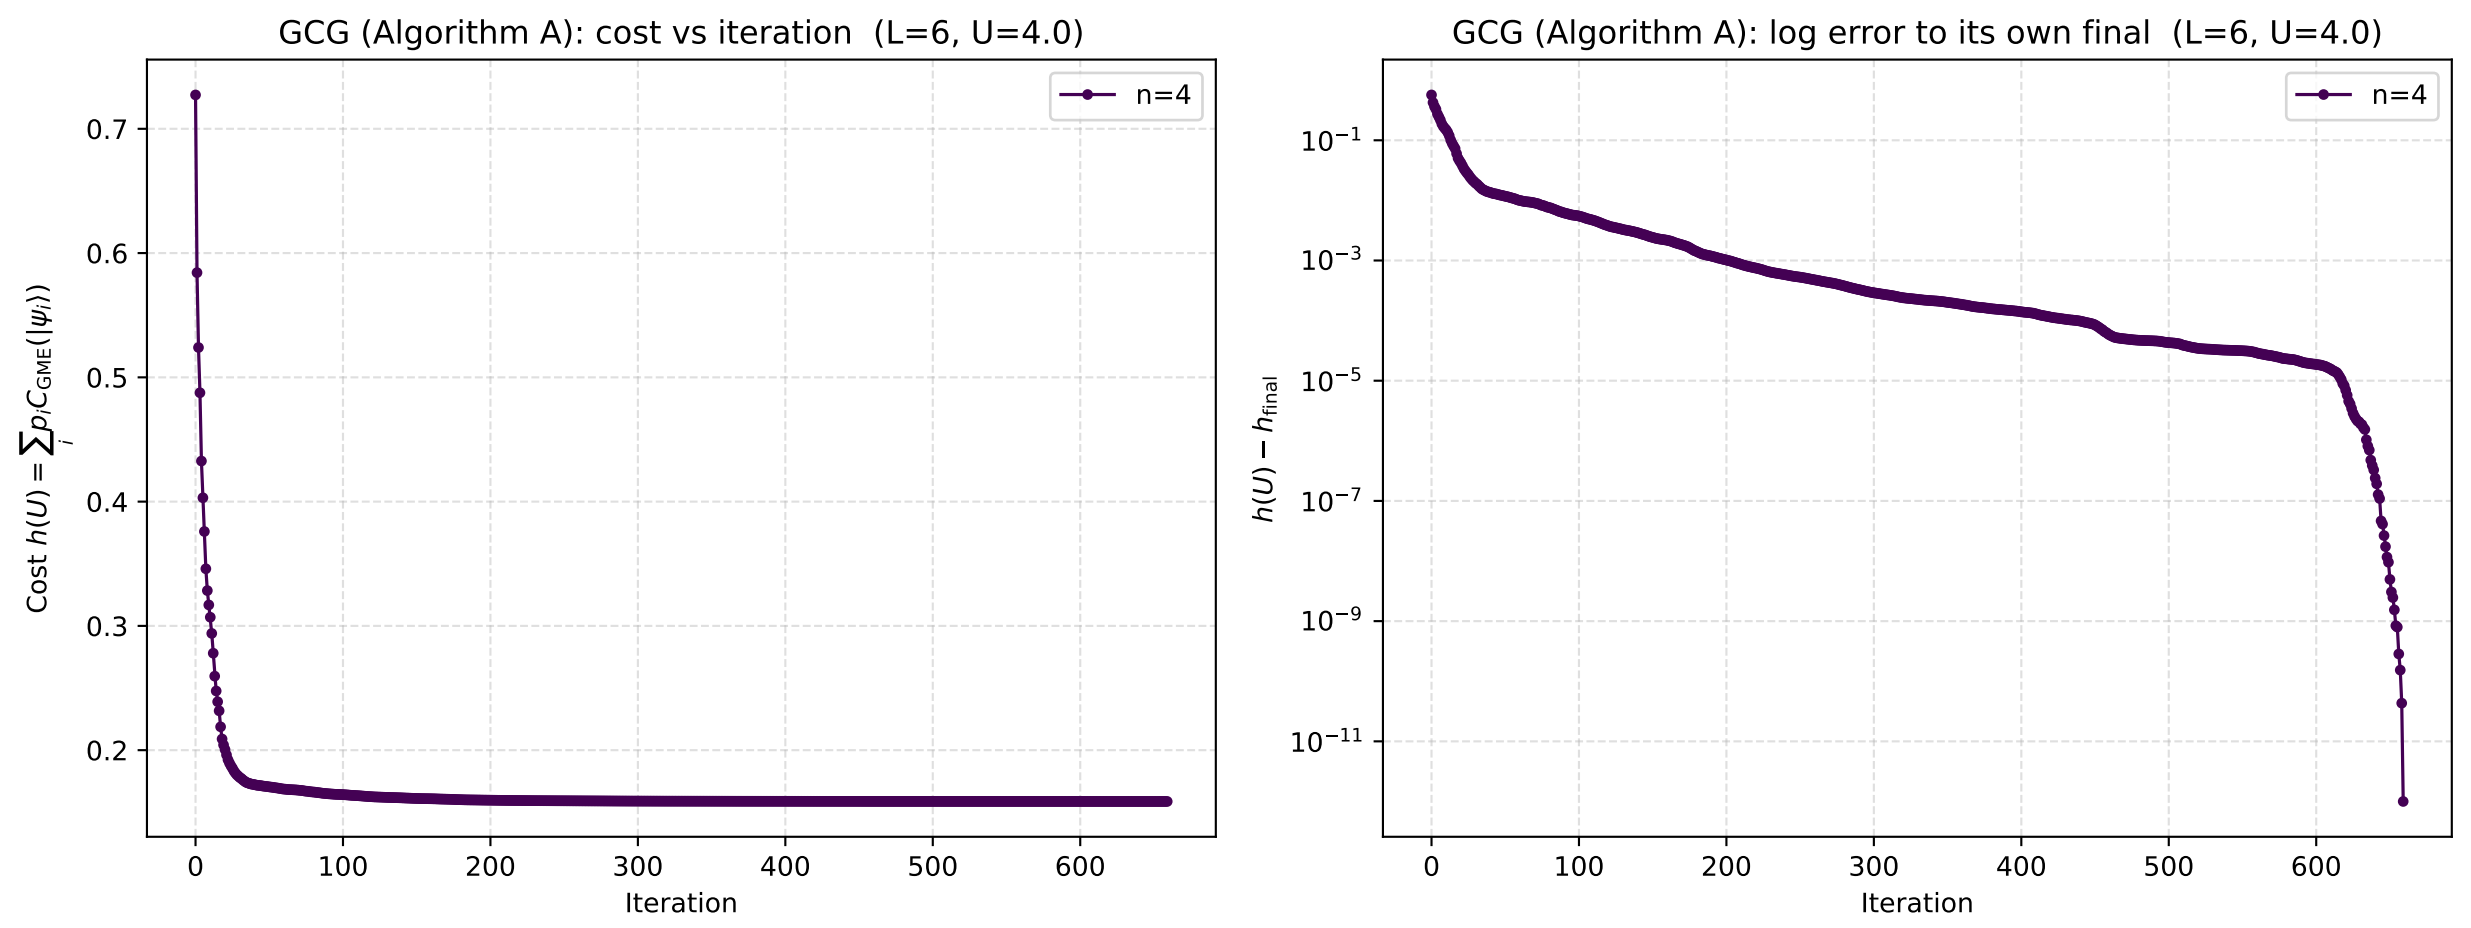
GCG (Algorithm A): cost vs iteration (L=6, U=4.0)
n=4
Cost $h(U) = \sum_i p_i C_{\mathrm{GME}}(|\psi_i\rangle)$
Iteration
GCG (Algorithm A): log error to its own final (L=6, U=4.0)
n=4
$h(U) - h_{\mathrm{final}}$
Iteration