



WHAT IS JS?

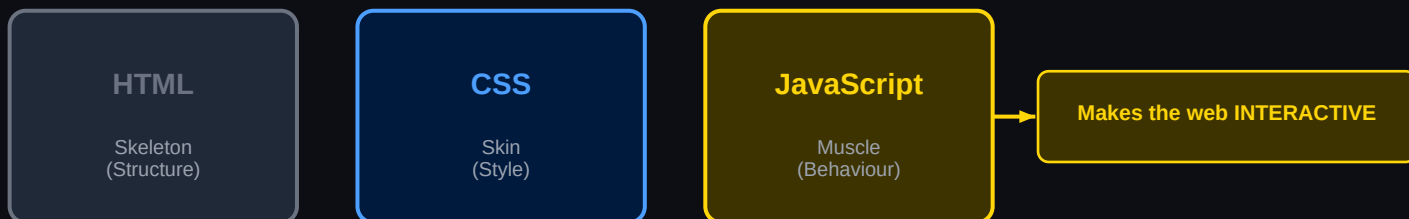

WHERE DOES IT RUN?

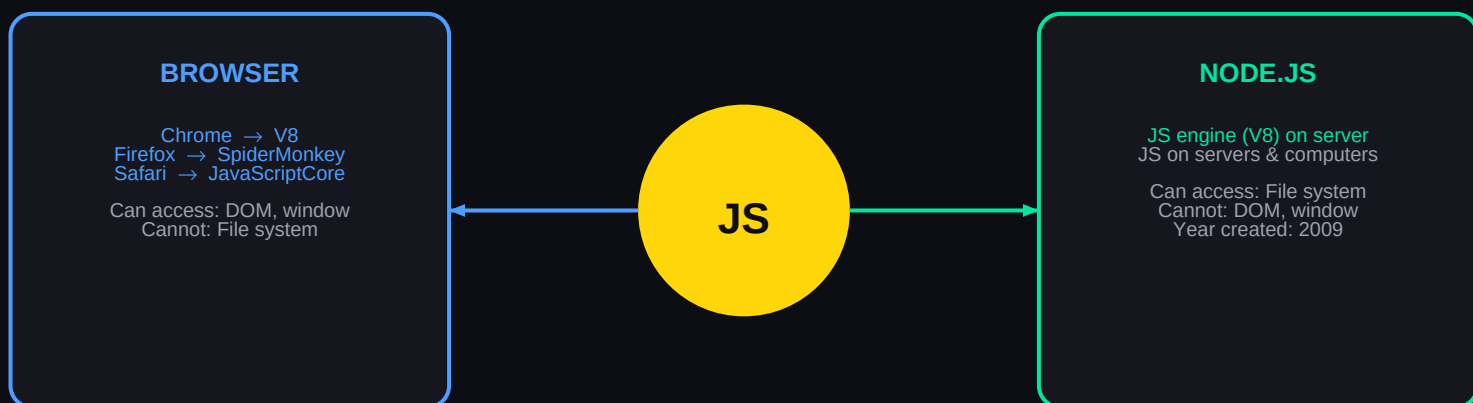

QUICK HISTORY



```
console . log ( "Hello JS!" ) ;
```

String

```
console.log("Priya")
```

**"Priya"**

output

Number

```
console.log(42)
```

**42**

output

Boolean

```
console.log(true)
```

**true**

output

Variable

```
console.log(name)
```

**Priya**

output

VARIABLES**const****Cannot be
reassigned**

```
const name = "Priya";  
// name = "Raj"; ■
```

■ Use by default

let**CAN be
reassigned**

```
let score = 0;  
score = 10; // ■
```

■ When value changes

var**Old style
(pre-2015)**

```
var x = 5;  
// avoid this
```

■ Don't use in new code

NO → YES
const let
Will the value change?

NAMING CONVENTIONS

camelCase	→ Variables & Functions	→ firstName totalScore handleClick
PascalCase	→ Classes & Components	→ UserProfile AppConfig Button
ALL_CAPS	→ Fixed Constants	→ MAX_SIZE API_URL BASE_URL
kebab-case	→ File Names	→ my-script.js user-profile.js

COMMENTS

Single Line //

```
// This explains WHY
const tax = 0.18; // 18% GST
```

Multi Line /* */

```
/* This function handles
   user authentication logic */
function login() { ... }
```

■ Write WHAT the code does in code. Write WHY you did it in comments.

QUICK CHEATSHEET

Print to console

```
console.log("text");
```

Declare variable

```
let score = 0;
```

Undefined (no value)

```
let city; // undefined
```

Declare constant

```
const name = "Priya";
```

Reassign variable

```
score = score + 5;
```

Strict mode

```
"use strict";
```

MENTAL MODEL

