


Linux, MySQL, DHCP, VSFTPD és Windows Server Jegyzetek

Ez a dokumentum Linux Ubuntu szerver, MySQL, DHCP, VSFTPD, Windows PowerShell és Active Directory alap konfigurációs parancsokat tartalmaz.

Referencia kép:

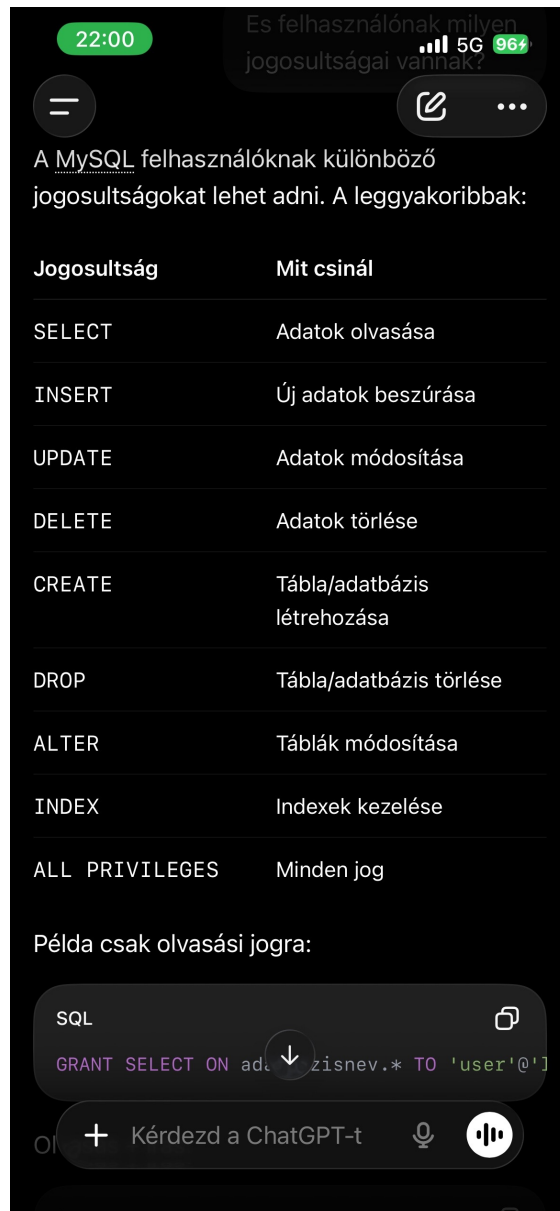

MySQL szerver

```
sudo apt update
sudo apt install mysql-server

sudo systemctl status mysql
sudo systemctl start mysql
sudo systemctl enable mysql

sudo mysql
```

```
CREATE DATABASE adatbazisnev;

CREATE USER 'felhasznalo'@'localhost' IDENTIFIED BY 'jelszo';

GRANT ALL PRIVILEGES ON adatbazisnev.* TO 'felhasznalo'@'localhost';
FLUSH PRIVILEGES;

sudo nano /etc/mysql/mysql.conf.d/mysqld.cnf

sudo systemctl restart mysql
```

DHCP szerver

```
sudo apt update
sudo apt install isc-dhcp-server

sudo nano /etc/default/isc-dhcp-server

INTERFACESv4="eth0"

sudo nano /etc/dhcp/dhcpd.conf

subnet 192.168.1.0 netmask 255.255.255.0 {
    range 192.168.1.100 192.168.1.200;
    option routers 192.168.1.1;
    option domain-name-servers 8.8.8.8, 1.1.1.1;
    default-lease-time 600;
    max-lease-time 7200;
}

sudo systemctl restart isc-dhcp-server
sudo systemctl enable isc-dhcp-server
sudo systemctl status isc-dhcp-server
```

Felhasználó és csoport kezelés

```
sudo adduser felhasznalonev

sudo usermod -aG sudo felhasznalonev

groups felhasznalonev

sudo passwd felhasznalonev

sudo deluser felhasznalonev

sudo deluser --remove-home felhasznalonev

sudo groupadd csoportnev

sudo usermod -aG csoportnev felhasznalonev

sudo usermod -g csoportnev felhasznalonev

sudo gpasswd -d felhasznalonev csoportnev
```

VSFTPD szerver

```
sudo apt update
sudo apt install vsftpd

sudo systemctl status vsftpd

sudo nano /etc/vsftpd.conf

anonymous_enable=NO
local_enable=YES
write_enable=YES
local_umask=022
dirmessage_enable=YES
xferlog_enable=YES
use_localtime=YES
chroot_local_user=YES
allow_writeable_chroot=YES
```

```
sudo systemctl restart vsftpd

sudo adduser ftpuser

/home/ftpuser

sudo ufw allow 20/tcp
sudo ufw allow 21/tcp

pasv_min_port=40000
pasv_max_port=40100

sudo ufw allow 40000:40100/tcp
```

Windows PowerShell és Active Directory

```
New-LocalUser -Name "bence" -Password (Read-Host -AsSecureString)

Add-LocalGroupMember -Group "Administrators" -Member "bence"

New-ADUser `
-Name "Bence Kantor" `
-GivenName "Bence" `
-Surname "Kantor" `
-SamAccountName "bence" `
-UserPrincipalName "bence@domain.local" `
-AccountPassword (Read-Host -AsSecureString) `
-Enabled $true

Add-LocalGroupMember -Group "Remote Desktop Users" -Member "bence"

Add-ADGroupMember -Identity "IT" -Members "bence"

Remove-LocalUser -Name "bence"

Remove-ADUser "bence"

Remove-LocalGroupMember -Group "Administrators" -Member "bence"

Remove-ADGroupMember -Identity "IT" -Members "bence"

New-ADOrganizationalUnit -Name "IT"

New-ADOrganizationalUnit `
-Name "Fejlesztok" `
-Path "DC=domain,DC=local"

New-ADOrganizationalUnit `
-Name "HR" `
-ProtectedFromAccidentalDeletion $true

New-ADGroup `
-Name "IT_Admins" `
-GroupScope Global `
-GroupCategory Security

New-ADGroup `
-Name "Fejlesztok" `
-GroupScope Global `
-GroupCategory Security `
-Path "OU=IT,DC=domain,DC=local"

Add-ADGroupMember `
-Identity "IT_Admins" `
-Members "bence"

Get-ADOrganizationalUnit -Filter *

Get-ADGroup -Filter *
```

Linux IP cím beállítás

```
/etc/netplan/50-cloud-init.yaml

network:
  version: 2
```

```
ethernets:
  ens33:
    dhcp4: false
    addresses:
      - 192.168.1.50/24
    routes:
      - to: default
        via: 192.168.1.1
    nameservers:
      addresses:
        - 8.8.8.8
        - 1.1.1.1

sudo netplan apply
```