


Procedimiento

Desde consola

1. Abrir una ventana de Símbolo de Sistema.

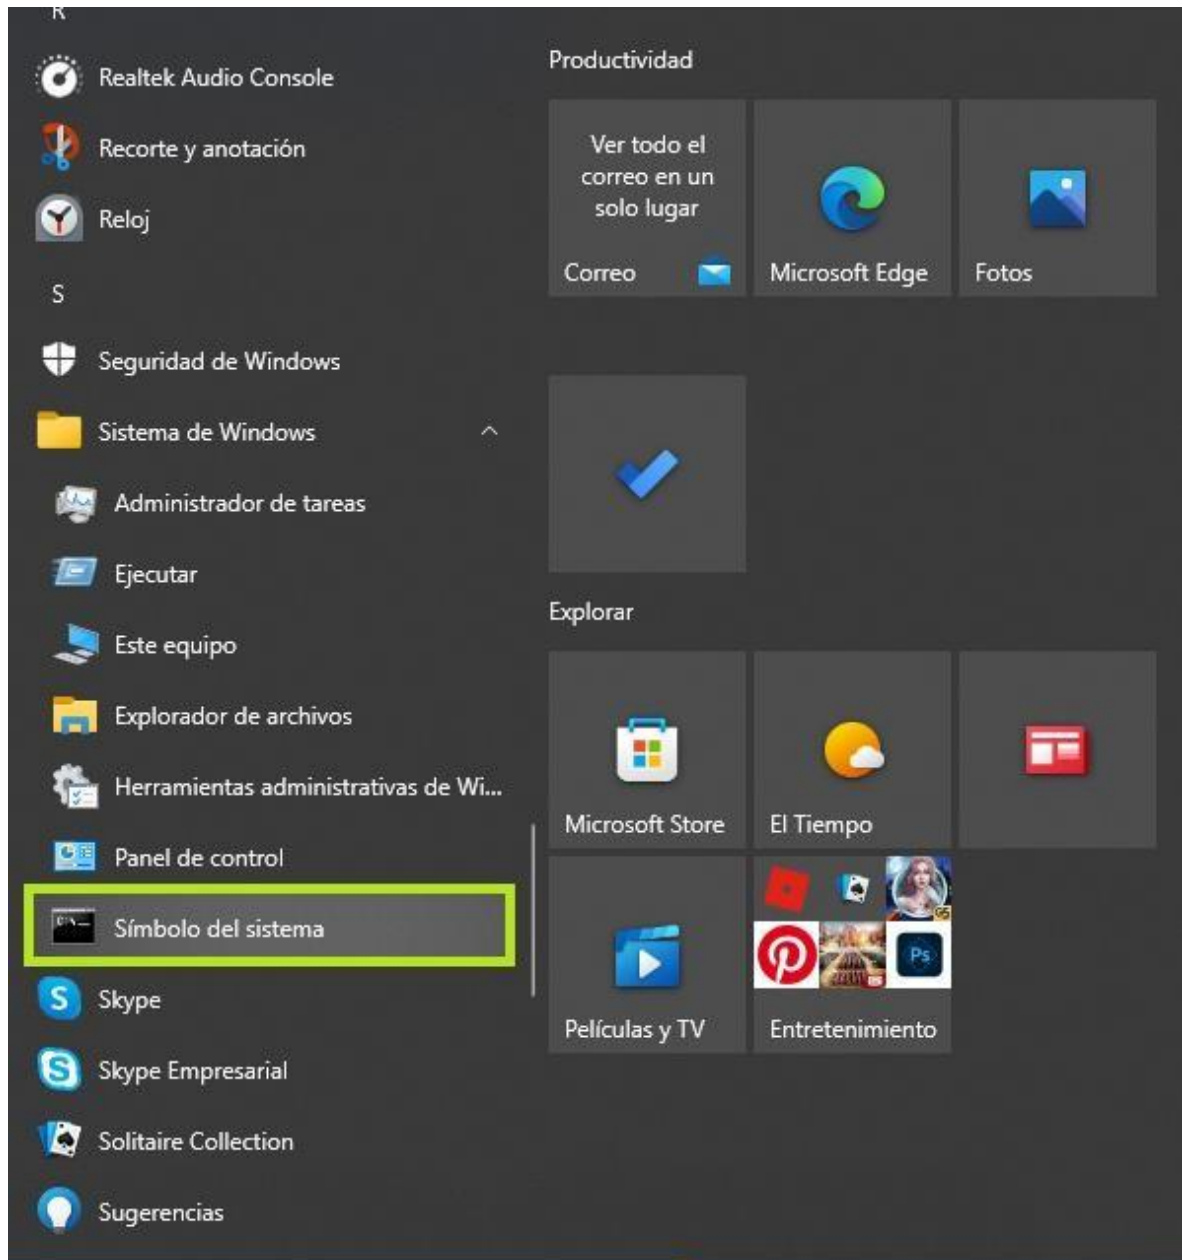

Posicionarse en la carpeta “\main\webapp\WEB-INF\views” mediante instrucciones de tipo “cd”. (La ruta dependerá en dónde se encuentre almacenado el simulador en la máquina del usuario final).



The screenshot shows a Windows command prompt window with the title bar "Administrador: Símbolo del sistema". The window contains the following text:

```
Microsoft Windows [Versión 10.0.19044.1826]  
(c) Microsoft Corporation. Todos los derechos reservados.  
C:\WINDOWS\system32>cd D:\Simulador\main\webapp\WEB-INF\views_
```

2. Ejecutar el comando ***"java -jar Simulador-1.0.0-SNAPSHOT.jar"***. Esperar a que termine la ejecución.



```
D:\Simulador\main\webapp\WEB-INF\views>java -jar Simulador-1.0.0-SNAPSHOT.jar
```


```
Administrador Simbolo del sistema - java -jar Simulator-1.0.0-SNAPSHOT.jar
D:\Simulador\main\webapp\WEB-INF\views>java -jar Simulator-1.0.0-SNAPSHOT.jar
```



```


[INFO] Scanning for projects...
[INFO]
[INFO] ------------------------------------------------------------------------
[INFO] Building Simulator 1.0.0-SNAPSHOT
[INFO] ------------------------------------------------------------------------
[INFO]
[INFO] --- maven-resources-plugin:2.6:resources (default-resources) @ Simulator ---
[INFO] Using default encoding to copy filtered resources.
[INFO] Copying 1 resource
[INFO]
[INFO] --- maven-compiler-plugin:2.3.2:compile (default-compile) @ Simulator ---
[INFO] Nothing to compile - all classes are up to date
[INFO]
[INFO] --- maven-resources-plugin:2.6:testResources (default-testResources) @ Simulator ---
[INFO] Using default encoding to copy filtered resources.
[INFO] Copying 0 resource
[INFO]
[INFO] --- maven-compiler-plugin:2.3.2:testCompile (default-testCompile) @ Simulator ---
[INFO] Nothing to compile - all classes are up to date
[INFO]
[INFO] --- maven-surefire-plugin:2.12.4:test (default-test) @ Simulator ---
[INFO]
[INFO] -----  
[INFO] Starting SimulatorApplication v1.0.0-SNAPSHOT on DESKTOP-QQBKXDS with PID 29652 (D:\Simulador\main\webapp\WEB-INF\views\Simulator-1.0.0  
[INFO] Started by user in D:\Simulador\main\webapp\WEB-INF\views  
[INFO] No active profile set, falling back to default profiles: default  
[INFO] Tomcat initialized with port(s): 8080 (http)  
[INFO] Starting service [Tomcat]  
[INFO] Starting Servlet engine: [Apache Tomcat/9.0.24]  
[INFO] At least one JAR was scanned for TLDs yet contained no TLDs. Enable debug logging for this logger for a complete list of JARs that were  
[INFO] Skipped during scanning can improve startup time and JSP compilation time.  
[INFO] Initializing Spring embedded WebApplicationContext  
[INFO] Root WebApplicationContext: initialization completed in 1204 ms  
[INFO] Initializing ExecutorService 'applicationTaskExecutor'  
[INFO] Tomcat started on port(s): 8080 (http) with context path ''  
[INFO] Started SimulatorApplication in 1.834 seconds (JVM running for 2.104)
```

3. Para comprobar que el simulador se ha ejecutado correctamente, desde un navegador de internet ingresar a la siguiente dirección: ***"http://localhost:8080"***. Deberá mostrarse una interfaz como la que sigue:

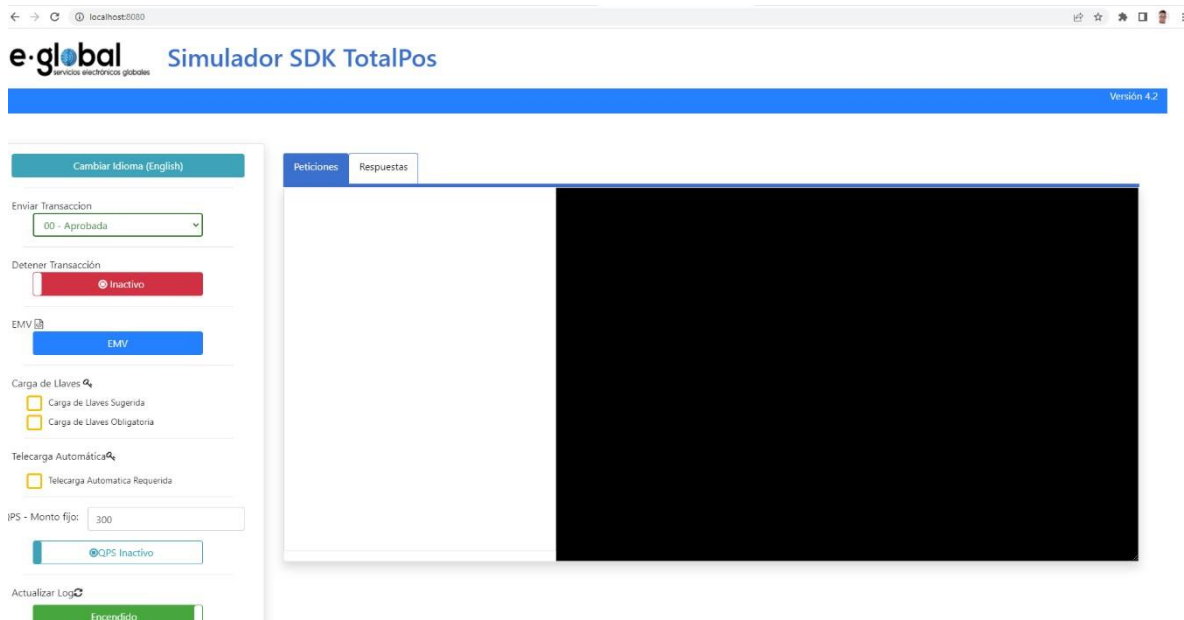


Desde Explorador de Windows


1. Posicionarse en la carpeta “**\main\webapp\WEB-INF\views**” a través del explorador de Windows. (La ruta dependerá en dónde se encuentre almacenado el simulador en la máquina del usuario final).

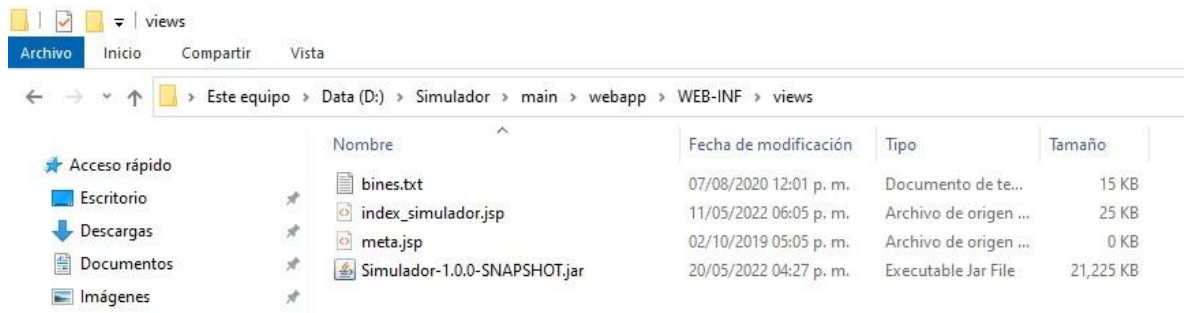


2. En la barra de direcciones escribir la palabra “**cmd**” y presionar la tecla “**Enter**”.

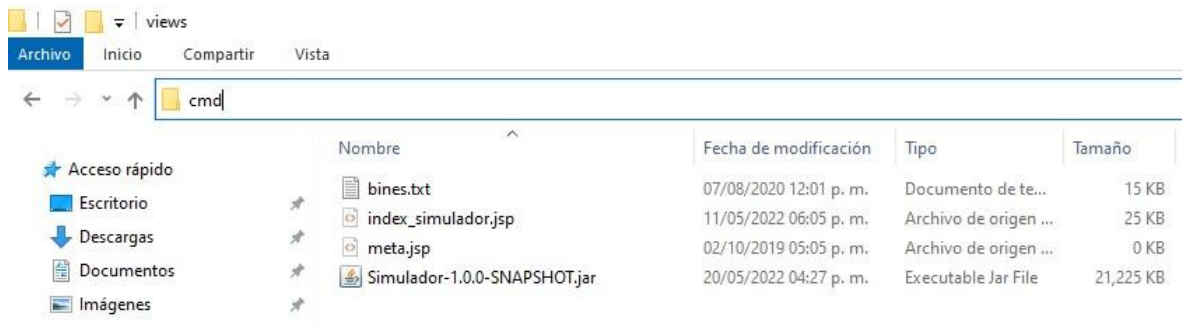

3. Se abrirá una ventana de símbolo de sistema en la ruta correspondiente a la carpeta **"\main\webapp\WEB-INF\views"**.

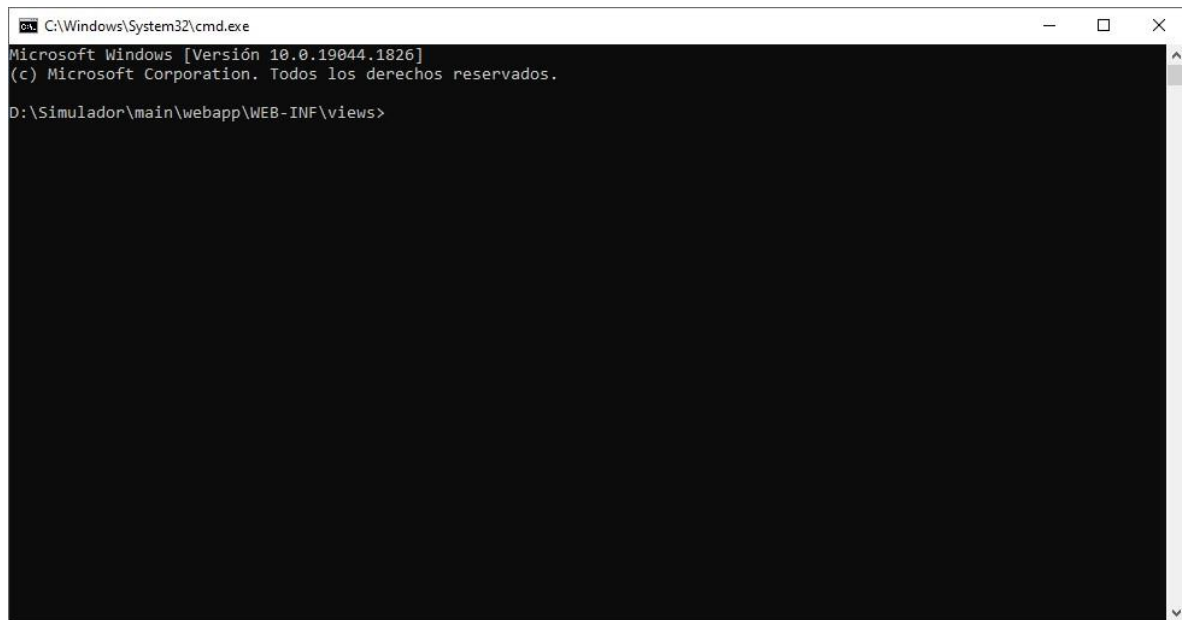

4. En la ventana de símbolo de sistema ejecutar el comando ***"java -jar Simulador-1.0.0SNAPSHOT.jar"***.

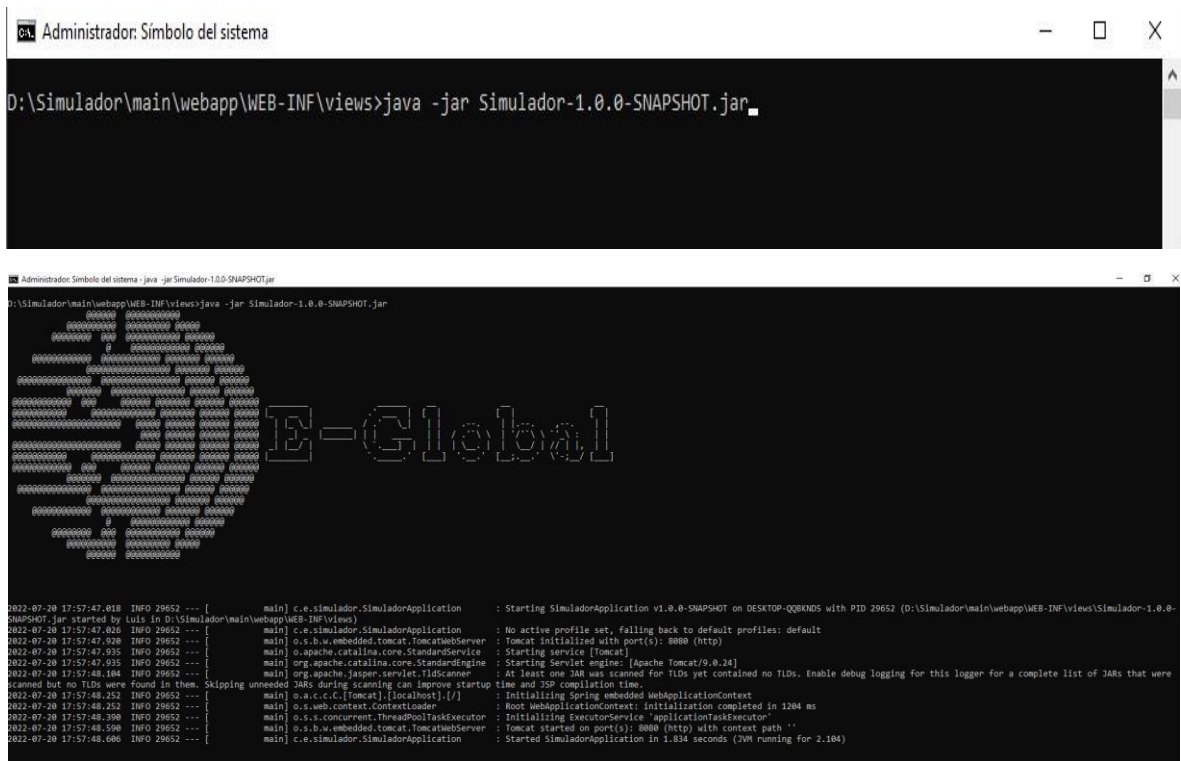

5. Para comprobar que el simulador se ha ejecutado correctamente, desde un navegador de internet ingresar a la siguiente dirección: ***"http://localhost:8080"***. Deberá mostrarse una interfaz como la que sigue:

