

Установка

1.

```
MINGW64:/c/Users/shadowfr1end/desktop/zxc

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~
$ git config --global user.name "Igorek"

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~
$ git config --global user.email "mr.rogut@mail.ru"
```

2.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~
$ git config --global core.autocrlf true

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~
$ git config --global core.safecrlf true
```

3.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~
$ git config --global core.quotepath off
```

Создание проекта


4.


```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop
$ mkdir zxc

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop
$ cd zxc


shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc
$ touch zxc.html

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc
$ ..
```



<div> <div> <div></div> <div></div> <div></div> <div></div> <div></div> </div> <div> <div>↑↓ Сортировать ▾</div> <div>☰ Просмотреть ▾</div> <div>...</div> </div> </div>			
Имя	Дата изменения	Тип	Размер
 zxc.html	06.06.2025 19:23	Chrome HTML Do...	0 КБ

5.

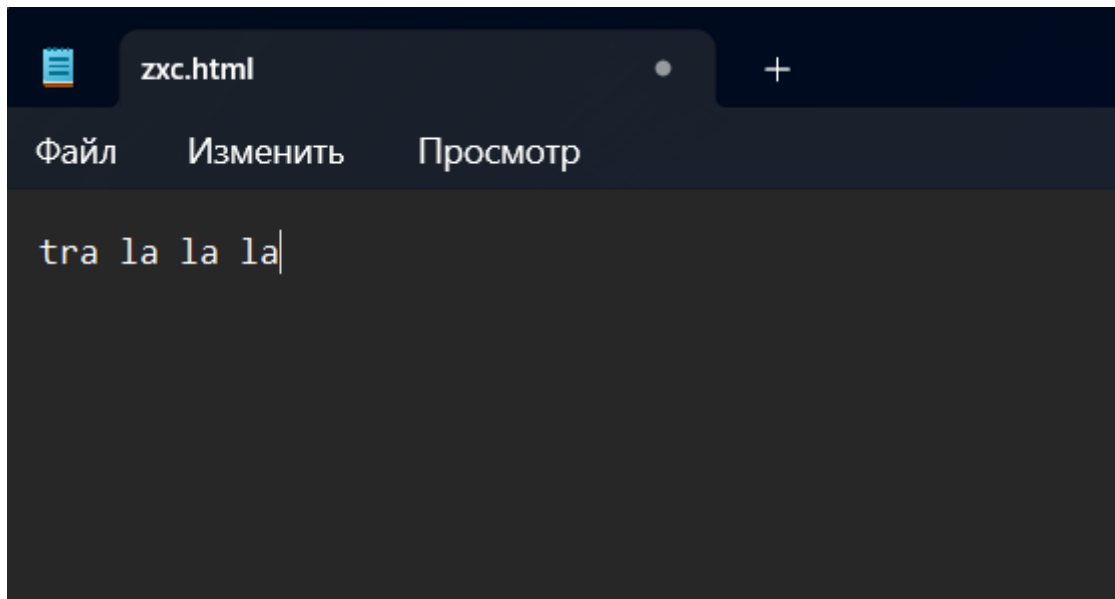

6.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc
$ git init
Initialized empty Git repository in C:/Users/shadowfrlend/Desktop/zxc/.git/
```

7.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git add zxc.html

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git commit -m "First Commit"
[master (root-commit) a5692da] First Commit
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 zxc.html

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$
```

Проверка состояния


8.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git status
On branch master
nothing to commit, working tree clean

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$
```

Внесение изменений

9.

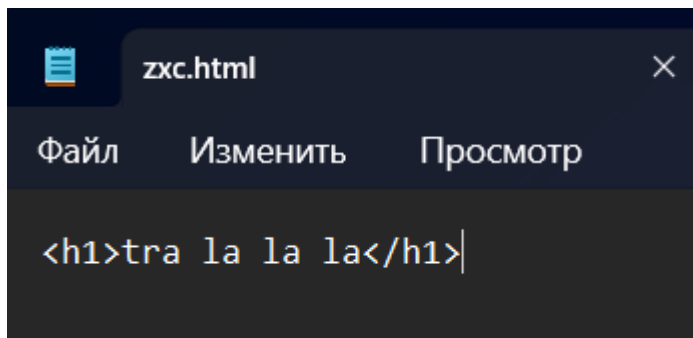

10.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git status
On branch master
Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   zxc.html

no changes added to commit (use "git add" and/or "git commit -a")

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$
```

Индексация изменений

11.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git add zxc.html

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git status
On branch master
Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
        modified:   zxc.html

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ D
```

Индексация и коммит

12.

Имя	Дата изменения	Тип	Размер
.git	06.06.2025 21:03	Папка с файлами	
a.html	06.06.2025 20:31	Chrome HTML Do...	1 КБ
b.html	06.06.2025 20:31	Chrome HTML Do...	1 КБ
v.html	06.06.2025 20:31	Chrome HTML Do...	1 КБ
zxc.html	06.06.2025 20:31	Chrome HTML Do...	1 КБ

13.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git add a.html

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git add b.html

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git commit -m "Changes for a and b"
[master 0ee81cc] Changes for a and b
3 files changed, 3 insertions(+)
create mode 100644 a.html
create mode 100644 b.html

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$
```

14.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git add v.html
```

Коммит изменений

15. Я не успел сделать скрин, но команду я ввел

16.

```
MINGW64:c:/Users/shadowfr1end/desktop/zxc
GNU nano 8.3 C:/Users/shadowfr1end/Desktop/zxc/.git/COMMIT_EDITMSG Modified
Added h2 tag xd
# Please enter the commit message for your changes. Lines starting
# with '#' will be ignored, and an empty message aborts the commit.
#
# On branch master
# Changes to be committed:
#   new file:   v.html
#
```

17.

```
[master 8a424e5] Added h2 tag xd
1 file changed, 1 insertion(+)
create mode 100644 v.html

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$
```

18.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git status
On branch master
nothing to commit, working tree clean

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$
```

19.

```
zxc.html
C: > Users > shadowfr1end > Desktop > zxc > zxc.html > html
1 <html>
2   <body>
3     <h1> tra la la la</h1>
4     <h2>Second line</h2>
5   </body>
6 </html>
```

20.

```

C: > Users > shadowfr1end > Desktop > zxc > zxc.html > html
1  <html>
2      <head>
3
4      </head>
5      <body>
6          <h1> tra la la la</h1>
7          <h2>Second line</h2>
8      </body>
9  </html>
10

```

21.

```

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git status
On branch master
Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   zxc.html

no changes added to commit (use "git add" and/or "git commit -a")

```

22.

```

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git commit -m "Add standard HTML tags"
On branch master
Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   zxc.html

no changes added to commit (use "git add" and/or "git commit -a")

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git status
On branch master
Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   zxc.html

no changes added to commit (use "git add" and/or "git commit -a")

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$

```

23.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git add .

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git status
On branch master
Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
        modified:   zxc.html

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$
```

24.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git commit -m "Add HTML header"
[master e75a525] Add HTML header
1 file changed, 9 insertions(+), 1 deletion(-)
```

История

2.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git log --pretty=oneline
e75a525dd93c170245d71ea59c95030554df7680 (HEAD -> master) Add HTML header
8a424e574fe7131b62cb0f37d0246f22f2a5262a Added h2 tag xd
0ee81cc826f8bb371777f348a82ab6bc1a376022 Changes for a and b
a5692daed713990e72e06eadb2ac87040a5add51 First Commit
```

3.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git log --pretty=oneline --max-count=2
e75a525dd93c170245d71ea59c95030554df7680 (HEAD -> master) Add HTML header
8a424e574fe7131b62cb0f37d0246f22f2a5262a Added h2 tag xd
```

4.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git log --pretty=oneline --since="10 days ago"
e75a525dd93c170245d71ea59c95030554df7680 (HEAD -> master) Add HTML header
8a424e574fe7131b62cb0f37d0246f22f2a5262a Added h2 tag xd
0ee81cc826f8bb371777f348a82ab6bc1a376022 Changes for a and b
a5692daed713990e72e06eadb2ac87040a5add51 First Commit
```

5.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git log --pretty=oneline --until="5 minutes ago"
e75a525dd93c170245d71ea59c95030554df7680 (HEAD -> master) Add HTML header
8a424e574fe7131b62cb0f37d0246f22f2a5262a Added h2 tag xd
0ee81cc826f8bb371777f348a82ab6bc1a376022 Changes for a and b
a5692daed713990e72e06eadb2ac87040a5add51 First Commit
```

6.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git log --pretty=oneline --author="Igorek"
e75a525dd93c170245d71ea59c95030554df7680 (HEAD -> master) Add HTML header
8a424e574fe7131b62cb0f37d0246f22f2a5262a Added h2 tag xd
0ee81cc826f8bb371777f348a82ab6bc1a376022 Changes for a and b
a5692daed713990e72e06eadb2ac87040a5add51 First Commit
```

7.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git log --pretty=oneline --all
e75a525dd93c170245d71ea59c95030554df7680 (HEAD -> master) Add HTML header
8a424e574fe7131b62cb0f37d0246f22f2a5262a Added h2 tag xd
0ee81cc826f8bb371777f348a82ab6bc1a376022 Changes for a and b
a5692daed713990e72e06eadb2ac87040a5add51 First Commit
```

8.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git log --all --pretty=format:"%h %cd %s (%an)" --since="12 days ago"
e75a525 Fri Jun 6 22:19:39 2025 +0300 Add HTML header (Igorek)
8a424e5 Fri Jun 6 21:22:24 2025 +0300 Added h2 tag xd (Igorek)
0ee81cc Fri Jun 6 21:03:36 2025 +0300 Changes for a and b (Igorek)
a5692da Fri Jun 6 20:25:26 2025 +0300 First Commit (Igorek)
```

Алиасы

9.


```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git config --global alias.co checkout

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git config --global alias.ci commit

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git config --global alias.st status

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git config --global alias.br branch

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git config --global alias.hist "log -pretty=format: '%h %ad | %s%d [%an]'" --graph --date=short"
bash: %s%d: command not found

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git config --global alias.hist "log -pretty=format: '%h %ad | %s%d [%an]'" --graph --date=short"
bash: %s%d: command not found

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git config --global alias.hist "log -pretty=format: '%h %ad | %s%d [%an]'" --graph --date=short"
bash: %s%d: command not found

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git config --global alias.type "cat-file -t"

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git config --global alias.dump "cat-file -p"

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$
```

10.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git config --global alias.hist "log --pretty=format: '%h %ad | %s%d [%an]'" --graph --date=short"
warning: alias.hist has multiple values
error: cannot overwrite multiple values with a single value
       Use a regexp, --add or --replace-all to change alias.hist.
```

11.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ alias gs="git status"

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ gs
On branch master
nothing to commit, working tree clean
```

Создание тегов версий

15.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git tag ver1
```

16.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git checkout ver1
Note: switching to 'ver1'.

You are in 'detached HEAD' state. You can look around, make experimental
changes and commit them, and you can discard any commits you make in this
state without impacting any branches by switching back to a branch.

If you want to create a new branch to retain commits you create, you may
do so (now or later) by using -c with the switch command. Example:

    git switch -c <new-branch-name>

Or undo this operation with:

    git switch -

Turn off this advice by setting config variable advice.detachedHead to false
HEAD is now at e75a525 Add HTML header

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc ((ver1))
$ cat zxc.html
<html>
  <head>

  </head>
  <body>
    <h1> tra la la la</h1>
    <h2>Second line</h2>
  </body>
</html>
```

17.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc ((ver1))
$ git tag ver1-beta
```

18.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc ((ver1))
$ git checkout ver1
HEAD is now at e75a525 Add HTML header
```

19.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc ((ver1))
$ git tag
ver1
ver1-beta
```


20.

Отмена локальных изменений (до индексации)

21.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc ((ver1))
$ git checkout master
Switched to branch 'master'
```

22.

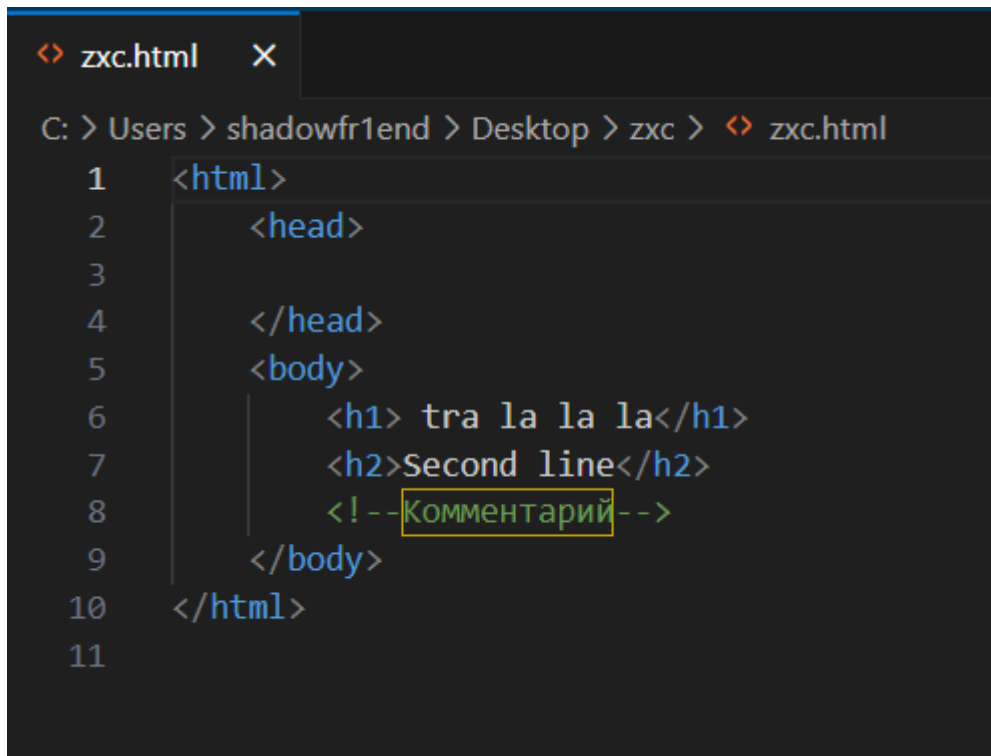

```
<> zxc.html X
C: > Users > shadowfr1end > Desktop > zxc > <> zxc.html
1  <html>
2      <head>
3
4      </head>
5      <body>
6          <h1> tra la la la</h1>
7          <h2>Second line</h2>
8          <!--Комментарий-->
9      </body>
10 </html>
11
```

23.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git st
On branch master
Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   zxc.html

no changes added to commit (use "git add" and/or "git commit -a")
```

24.

```

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git checkout zxc.html
Updated 1 path from the index

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git st
On branch master
nothing to commit, working tree clean

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ cat zxc.html
<html>
  <head>

  </head>
  <body>
    <h1> tra la la la</h1>
    <h2>Second line</h2>
  </body>
</html>

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)

```

Отмена проиндексированных изменений

25.

```

zxc.html
C: > Users > shadowfr1end > Desktop > zxc > zxc.html > html > head
1 <html>
2   <head>
3   <!-- Еще один комментарий -->
4
5   </head>
6   <body>
7     <h1> tra la la la</h1>
8     <h2>Second line</h2>
9   </body>
10 </html>
11

```

26.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git add zxc.html

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git st
On branch master
Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
        modified:   zxc.html
```

27.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git reset HEAD zxc.html
Unstaged changes after reset:
M       zxc.html

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git st
On branch master
Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   zxc.html

no changes added to commit (use "git add" and/or "git commit -a")

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ |
```

28.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git checkout zxc.html
Updated 1 path from the index

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git st
On branch master
nothing to commit, working tree clean
```

Отмена коммитов

29.

```
zxc.html
C: > Users > shadowfr1end > Desktop > zxc > zxc.html > html > body
1  <html>
2      <head>
3
4      </head>
5      <body>
6          <h1> tra la la la</h1>
7          <h2>Second line</h2>
8          <!--Еще один комментарий-->
9      </body>
10 </html>
11
```

30.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git add zxc.html

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git commit -m "Oops, this is a bad commit"
[master 0f8c49d] Oops, this is a bad commit
1 file changed, 1 insertion(+)
```

36.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git reset --hard ver1
HEAD is now at e75a525 Add HTML header
```

38.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git tag -d oops
Deleted tag 'oops' (was 0f8c49d)
```

1.

```
zxc.html X
C: > Users > shadowfr1end > Desktop > zxc > zxc.html > ...
1  <!--Author: Igorek!-->
2  <html>
3      <head>
4
5      </head>
6      <body>
7          <h1> tra la la la</h1>
8          <h2>Second line</h2>
9      </body>
10 </html>
11
```

2.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git add zxc.html

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git commit -m "Add an author comment"
[master 4fd27fa] Add an author comment
1 file changed, 1 insertion(+)

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$
```

3.

```
zxc.html X
C: > Users > shadowfr1end > Desktop > zxc > zxc.html > ...
1  <!--Author: Igorek (mr.rogut@mail.ru)-->
2  <html>
3      <head>
4
5      </head>
6      <body>
7          <h1> tra la la la</h1>
8          <h2>Second line</h2>
9      </body>
10 </html>
11
```

4.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git add zxc.html

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git commit -amend -m "Add an author/email comment"
error: did you mean '--amend' (with two dashes)?

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git commit --amend -m "Add an author/email comment"
[master e55abd1] Add an author/email comment
Date: Sat Jun 7 19:56:32 2025 +0300
1 file changed, 1 insertion(+)
```

Перемещение файлов

6.


```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ mkdir lib

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git mv zxc.html lib

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git status
On branch master
Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
        renamed:    zxc.html -> lib/zxc.html

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$
```


7.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git commit -m "Moved helo.html to lib"
[master 52012dc] Moved helo.html to lib
1 file changed, 0 insertions(+), 0 deletions(-)
rename zxc.html => lib/zxc.html (100%)

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$
```

Подробнее о структуре

8.

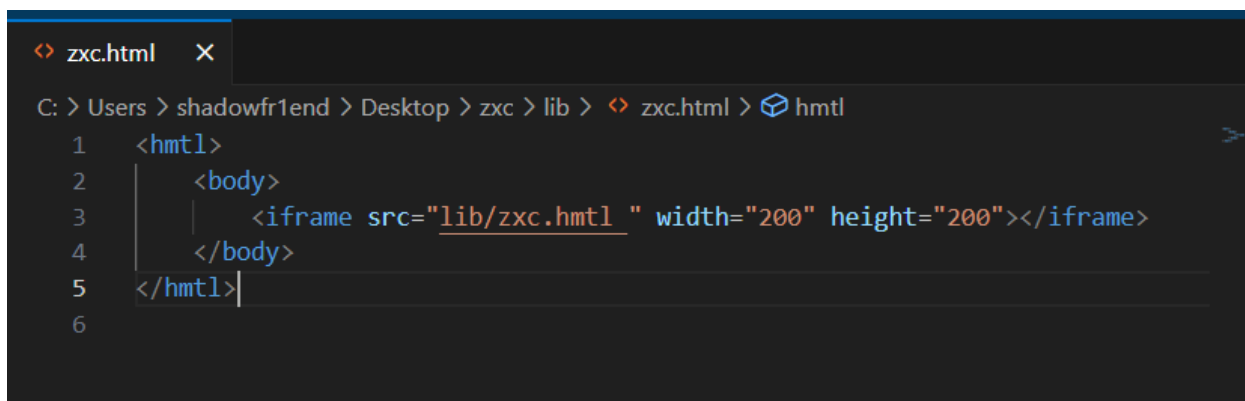

```
zxc.html
C: > Users > shadowfr1end > Desktop > zxc > lib > zxc.html > hmtl
1  <html>
2    <body>
3      <iframe src="lib/zxc.html" width="200" height="200"></iframe>
4    </body>
5  </html>
6
```

9.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc/lib (master)
$ git add zxc.html

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc/lib (master)
$ git commit -m "Added zxc.html"
[master 47b82a6] Added zxc.html
1 file changed, 4 insertions(+), 8 deletions(-)
```

11.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ ls -C .git
COMMIT_EDITMSG  HEAD  ORIG_HEAD  config  description  hooks/  index  info/  logs/  objects/  refs/
```

12.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ ls -C .git/objects
0a/ 0f/ 17/ 39/ 40/ 4f/ 61/ 79/ 8a/ 9a/ a7/ c2/ e5/ e7/ info/
0e/ 11/ 36/ 3d/ 47/ 52/ 68/ 83/ 92/ a5/ b0/ d4/ e6/ f0/ pack/
```

13.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ ls -C .git/objects//f0
bcb742c53c9f9ba5670e066e980ede57df5d8b
```

14.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ cat .git/config
[core]
    repositoryformatversion = 0
    filemode = false
    bare = false
    logallrefupdates = true
    symlinks = false
    ignorecase = true
```

15.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ ls .git/refs
heads/  tags/

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ ls .git/refs/heads
master

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ ls .git/refs/tags
ver1  ver1-beta

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ cat .git/refs/tags/ver1
e75a525dd93c170245d71ea59c95030554df7680

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ |
```

16.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ cat .git/HEAD
ref: refs/heads/master

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$
```

Работа с объектами git

17. Работа с объектами git у меня не получилась, выдает ошибку, сколько не пытался исправить, не помогает

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git hist --max-count=1
fatal: unrecognized argument: -pretty=format:%h
```

Создание ветки

1.


```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git checkout -b style
Switched to a new branch 'style'

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style)
$ git status
On branch style
nothing to commit, working tree clean
```

2.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style)
$ touch lib/style.css
```

3.

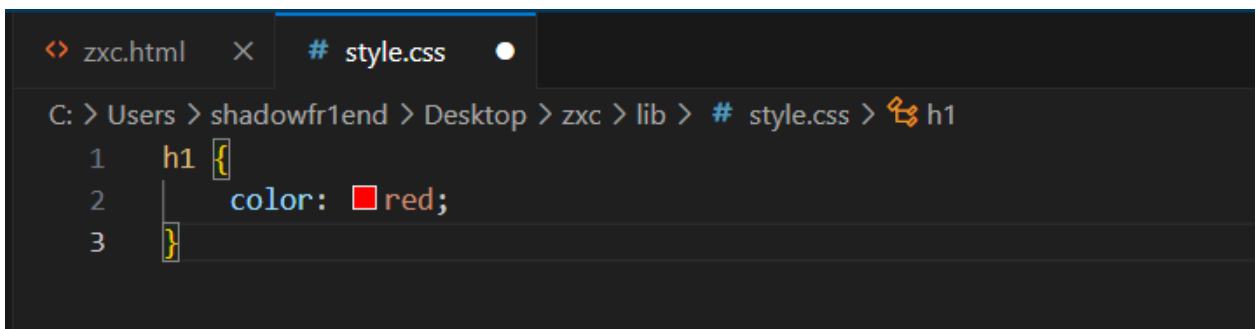


4.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc/lib (style)
$ git commit -m "Added css stylesheet"
On branch style
Untracked files:
  (use "git add <file>..." to include in what will be committed)
        style.css

nothing added to commit but untracked files present (use "git add" to track)
```

5.

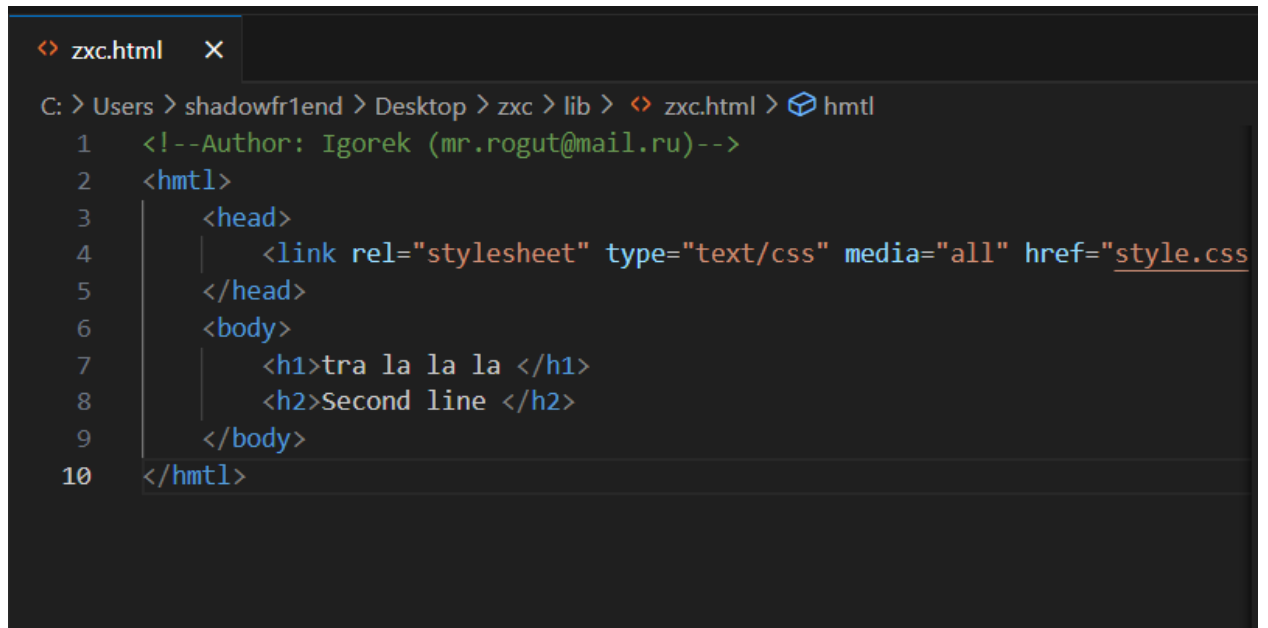

```
<> zxc.html X
C: > Users > shadowfr1end > Desktop > zxc > lib > <> zxc.html > hmtl
1  <!--Author: Igorek (mr.rogut@mail.ru)-->
2  <html>
3      <head>
4          <link rel="stylesheet" type="text/css" media="all" href="style.css" />
5      </head>
6      <body>
7          <h1>tra la la la </h1>
8          <h2>Second line </h2>
9      </body>
10 </html>
```

6.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style)
$ git add lib/zxc.html

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style)
$ git commit -m "zxc.html uses style.css"
[style 64752b4] zxc.html uses style.css
1 file changed, 7 insertions(+), 3 deletions(-)

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style)
$
```

7.

```
<> zxc.html X
C: > Users > shadowfr1end > Desktop > zxc > lib > <> zxc.html > hml > body > iframe
1  <!--Author: Igorek (mr.rogut@mail.ru)-->
2  <html>
3      <head>
4          <link rel="stylesheet" type="text/css" media="all" href="style.css" />
5      </head>
6      <body>
7          <iframe src="lib/zxc.html" width="200" height="200"></iframe>
8      </body>
9  </html>
```

8.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc/lib (style)
$ git add zxc.html

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc/lib (style)
$ git commit -m "Update zxc.html"
[style 29ff77e] Update zxc.html
1 file changed, 1 insertion(+), 2 deletions(-)
```

10.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc/lib (style)
$ git checkout master
Switched to branch 'master'
```

11.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc/lib (master)
$ git checkout style
Switched to branch 'style'
```

Изменения в ветке master

12.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc/lib (style)
$ git checkout master
Switched to branch 'master'
```

Слияние

16.

Я написал но у меня открылось окно быстро поэтому следующее окно будет с тем окном что у меня открылось

17.

Я написал но у меня открылось окно быстро поэтому следующее окно будет с тем окном что у меня открылось

18.

Создание конфликта

19.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc/lib (master)
$ git checkout master
Already on 'master'
```

20.

```
<> zxc.html ●
C: > Users > shadowfr1end > Desktop > zxc > lib > <> zxc.html > html
1  <!--Author: Igorek (mr.rogut@mail.ru)-->
2  <html>
3      <head>
4          <!--no style-->
5      </head>
6      <body>
7          <h1>tra la la la</h1>
8          <h2>Second line</h2>
9      </body>
10 </html>
```

21.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git add lib/zxc.html

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git commit -m "Life is great!"
[master d3d4ab8] Life is great!
1 file changed, 9 insertions(+), 5 deletions(-)

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ |
```

22.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git hist --all
fatal: unrecognized argument: -pretty=format:%h
```

Выдает ту же самую ошибку, которую я не могу решить.

Разрешение конфликтов

23.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git checkout style
Switched to branch 'style'

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style)
$ git merge master
Auto-merging lib/zxc.html
CONFLICT (content): Merge conflict in lib/zxc.html
Automatic merge failed; fix conflicts and then commit the result.
```

24.

```
zxc.html x
C:\Users\shadowfr1end\Desktop\zxc\lib\zxc.html > zxc.html > ?
1  <!--Author: Igorek (mr.rogut@mail.ru)-->
   Принять текущее изменение | Принять входящее изменение | Принять оба изменения | Сравнить изме
2  <<<<<< HEAD (текущее изменение)
3  <html>
4      <head>
5          <link rel="stylesheet" type="text/css" media="all" href="style.css"
6      </head>
7      <body>
8          <iframe src="lib/zxc.html" width="200" height="200"></iframe>
9      </body>
10 </html>
11 =====
12 <html>
13     <head>
14         <!--no style-->
15     </head>
16     <body>
17         <h1>tra la la la</h1>
18         <h2>Second line</h2>
19     </body>
20 </html>
21 >>>>>> master (входящее изменение)
22
```

25.

```
zxc.html
C: > Users > shadowfr1end > Desktop > zxc > lib > zxc.html > html
1  <!--Author: Igorek (mr.rogut@mail.ru)-->
2  <html>
3      <head>
4          <link rel="stylesheet" type="text/css" media="all" href="style.css">
5      </head>
6      <body>
7          <h1>tra la la la</h1>
8          <h2>Second line</h2>
9      </body>
10 </html>
```

26.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|MERGING)
$ git add lib/zxc.html

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|MERGING)
$ git commit -m "Marged master fixed conflict"
[style 1f1b66e] Marged master fixed conflict

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style)
$
```

Работа с Git

1.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style)
$ git checkout style
Already on 'style'
```

2.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style)
$ git hist
fatal: unrecognized argument: -pretty=format:%h
```

Та же самая ошибка

Сброс ветки master

3.


```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style)
$ git checkout master
Switched to branch 'master'

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git hist
fatal: unrecognized argument: -pretty=format:%h
```

4.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git reset --hard e75a525
HEAD is now at e75a525 Add HTML header
```

Перебазирование

5.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (master)
$ git checkout style
Switched to branch 'style'

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style)
$ git rebase master
Auto-merging lib/zxc.html
CONFLICT (content): Merge conflict in lib/zxc.html
error: could not apply d3d4ab8... Life is great!
hint: Resolve all conflicts manually, mark them as resolved with
hint: "git add/rm <conflicted_files>", then run "git rebase --continue".
hint: You can instead skip this commit: run "git rebase --skip".
hint: To abort and get back to the state before "git rebase", run "git rebase --abort".
hint: Disable this message with "git config set advice.mergeConflict false"
Could not apply d3d4ab8... Life is great!

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ git hist
fatal: unrecognized argument: -pretty=format:%h

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$
```

Слияние в ветку master

6.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ git checkout master
lib/zxc.html: needs merge
error: you need to resolve your current index first

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ git merge style
error: Merging is not possible because you have unmerged files.
hint: Fix them up in the work tree, and then use 'git add/rm <file>'
hint: as appropriate to mark resolution and make a commit.
fatal: Exiting because of an unresolved conflict.

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ |
```

Клонирование репозитория

8.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop
$ git clone zxc zxcursed
Cloning into 'zxcursed'...
done.
Note: switching to '29ff77e48ca8eab02aa5e10dc923e88bb97300a9'.

You are in 'detached HEAD' state. You can look around, make experimental
changes and commit them, and you can discard any commits you make in this
state without impacting any branches by switching back to a branch.

If you want to create a new branch to retain commits you create, you may
do so (now or later) by using -c with the switch command. Example:

    git switch -c <new-branch-name>

Or undo this operation with:

    git switch -

Turn off this advice by setting config variable advice.detachedHead to false
```

Просмотр клонированного репозитория

9.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop
$ cd zxcursed

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxcursed ((29ff77e...))
$ ls
a.html  b.html  lib/    v.html

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxcursed ((29ff77e...))
$
```

10.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxcursed ((29ff77e...))
$ git hist --all
fatal: unrecognized argument: -pretty=format:%h
```

Опять та же самая ошибка

Origin

11.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxcursed ((29ff77e...))
$ git remote
origin

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxcursed ((29ff77e...))
$ git remote show origin
* remote origin
Fetch URL: C:/Users/shadowfr1end/Desktop/zxc
Push URL: C:/Users/shadowfr1end/Desktop/zxc
HEAD branch: (unknown)
Remote branches:
  master tracked
  style tracked

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxcursed ((29ff77e...))
$
```

Удаленные ветки

12.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxcursed (master)
$ git branch
* master

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxcursed (master)
$ git branch -a
* master
  remotes/origin/master
  remotes/origin/style

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxcursed (master)
$
```

Работа с Git

1.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxcursed (master)
$ cd ../zxc

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ |
```

2.

```
C: > Users > shadowfr1end > Desktop > zxc > ⓘ README.txt
1   This is the zxc example from the Git tutorial
2   ((changed is original))
```

3.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ git commit -m "Changed README in original repo"
U      lib/zxc.html
error: Committing is not possible because you have unmerged files.
hint: Fix them up in the work tree, and then use 'git add/rm <file>'
hint: as appropriate to mark resolution and make a commit.
fatal: Exiting because of an unresolved conflict.
```

4.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ cd ../zxc

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ git fetch

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$
```

5.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ git hist --all
fatal: unrecognized argument: -pretty=format:%h

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ |
```

6.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ cat README.txt
This is the zxc example from the Git tutorial
(changed is original)
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$
```

7.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ git merge origin/master
error: Merging is not possible because you have unmerged files.
hint: Fix them up in the work tree, and then use 'git add/rm <file>'
hint: as appropriate to mark resolution and make a commit.
fatal: Exiting because of an unresolved conflict.

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$
```

8.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ cat README.txt
This is the zxc example from the Git tutorial
(changed is original)
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$
```

9.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ git pull
error: Pulling is not possible because you have unmerged files.
hint: Fix them up in the work tree, and then use 'git add/rm <file>'
hint: as appropriate to mark resolution and make a commit.
fatal: Exiting because of an unresolved conflict.

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ |
```

10.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxcursed (master)
$ git branch --track style origin/style
branch 'style' set up to track 'origin/style'.

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxcursed (master)
$
```

11.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop
$ git clone --bare zxc zxc.git
Cloning into bare repository 'zxc.git'...
done.


shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop
$ |
```

12.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop
$ cd zxc

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ git remote add shared ../nefor.git
```

13.

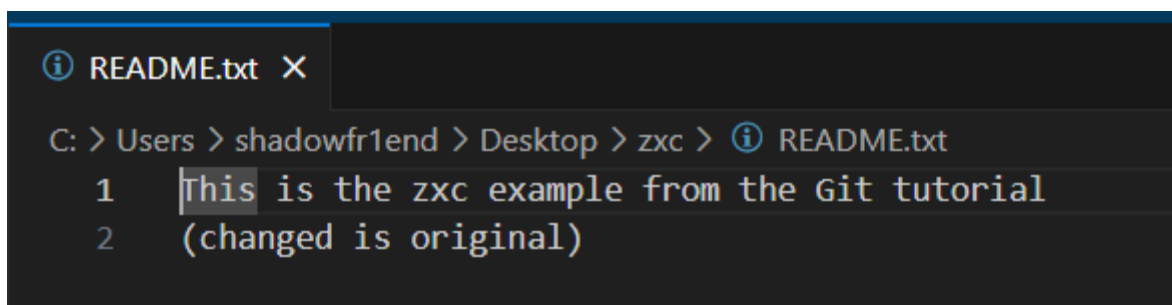

```

(i) README.txt X
C: > Users > shadowfr1end > Desktop > zxc > (i) README.txt
1  This is the zxc example from the Git tutorial
2  (changed is original)
```

14.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ git add README.txt

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ git commit -m "Added shared comment to README"
U      lib/zxc.html
error: Committing is not possible because you have unmerged files.
hint: Fix them up in the work tree, and then use 'git add/rm <file>'
hint: as appropriate to mark resolution and make a commit.
fatal: Exiting because of an unresolved conflict.

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$
```

15.

Все последующие пункты у меня выдавало ошибки, я не знаю как их исправить(

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ git push shared master
fatal: '../nefor.git' does not appear to be a git repository
fatal: Could not read from remote repository.

Please make sure you have the correct access rights
and the repository exists.

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ cd

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~
$ cd desktop

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop
$ git checkout master]
fatal: not a git repository (or any of the parent directories): .git

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop
$ cd zxc

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ git checkout master
lib/zxc.html: needs merge
error: you need to resolve your current index first

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ cd

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~
$ cd desktop

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop
$ cd zxcursed

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxcursed (master)
$ git push shared master
fatal: 'shared' does not appear to be a git repository
fatal: Could not read from remote repository.

Please make sure you have the correct access rights
and the repository exists.

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxcursed (master)
$
```

Работа с Git

1.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxcursed (master)
$ cd ../zxc

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ |
```

2.

```
C: > Users > shadowfr1end > Desktop > zxc > ⓘ README.txt
1   This is the zxc example from the Git tutorial
2   ((changed is original))
```

3.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ git commit -m "Changed README in original repo"
U       lib/zxc.html
error: Committing is not possible because you have unmerged files.
hint: Fix them up in the work tree, and then use 'git add/rm <file>'
hint: as appropriate to mark resolution and make a commit.
fatal: Exiting because of an unresolved conflict.
```

4.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ cd ../zxc

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ git fetch

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$
```

5.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ git hist --all
fatal: unrecognized argument: -pretty=format:%h

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ |
```

6.


```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ cat README.txt
This is the zxc example from the Git tutorial
(changed is original)
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$
```

7.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ git merge origin/master
error: Merging is not possible because you have unmerged files.
hint: Fix them up in the work tree, and then use 'git add/rm <file>'
hint: as appropriate to mark resolution and make a commit.
fatal: Exiting because of an unresolved conflict.

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$
```

8.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ cat README.txt
This is the zxc example from the Git tutorial
(changed is original)
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$
```

9.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ git pull
error: Pulling is not possible because you have unmerged files.
hint: Fix them up in the work tree, and then use 'git add/rm <file>'
hint: as appropriate to mark resolution and make a commit.
fatal: Exiting because of an unresolved conflict.

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ |
```

10.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxcursed (master)
$ git branch --track style origin/style
branch 'style' set up to track 'origin/style'.

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxcursed (master)
$
```

11.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop
$ git clone --bare zxc zxc.git
Cloning into bare repository 'zxc.git'...
done.


shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop
$ |
```

12.


```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop
$ cd zxc

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ git remote add shared ../nefor.git
```

13.

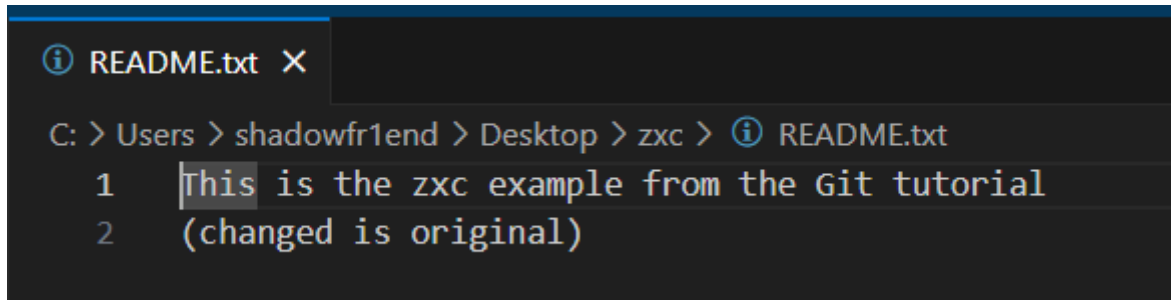

① README.txt X

C: > Users > shadowfr1end > Desktop > zxc > ① README.txt

```
1 This is the zxc example from the Git tutorial
2 (changed is original)
```

14.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ git add README.txt

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ git commit -m "Added shared comment to README"
U      lib/zxc.html
error: Committing is not possible because you have unmerged files.
hint: Fix them up in the work tree, and then use 'git add/rm <file>'
hint: as appropriate to mark resolution and make a commit.
fatal: Exiting because of an unresolved conflict.

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$
```

15.

Все последующие пункты у меня выдавало ошибки, я не знаю как их исправить(

```

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ git push shared master
fatal: '../nefor.git' does not appear to be a git repository
fatal: Could not read from remote repository.

Please make sure you have the correct access rights
and the repository exists.

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ cd

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~
$ cd desktop

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop
$ git checkout master]
fatal: not a git repository (or any of the parent directories): .git

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop
$ cd zxc

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ git checkout master
lib/zxc.html: needs merge
error: you need to resolve your current index first

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ cd

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~
$ cd desktop

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop
$ cd zxcursed

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxcursed (master)
$ git push shared master
fatal: 'shared' does not appear to be a git repository
fatal: Could not read from remote repository.

Please make sure you have the correct access rights
and the repository exists.

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxcursed (master)
$ |

```

Работа с Git

1.

```

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxcursed (master)
$ git clone https://github.com/schacon/ticgit
Cloning into 'ticgit'...
remote: Enumerating objects: 1857, done.
remote: Total 1857 (delta 0), reused 0 (delta 0), pack-reused 1857 (from 1)
Receiving objects: 100% (1857/1857), 334.06 KiB | 652.00 KiB/s, done.
Resolving deltas: 100% (837/837), done.

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxcursed (master)
$ |

```

2.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxcursed/ticgit (master)
$ git remote -v
origin https://github.com/schacon/ticgit (fetch)
origin https://github.com/schacon/ticgit (push)
```

3.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxcursed/ticgit (master)
$ git remote add pb https://github.com/paulbone/ticgit

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxcursed/ticgit (master)
$ git remote -v
git: 'remove' is not a git command. See 'git --help'.

The most similar command is
    remote

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxcursed/ticgit (master)
$ git remote -v
origin https://github.com/schacon/ticgit (fetch)
origin https://github.com/schacon/ticgit (push)
pb     https://github.com/paulbone/ticgit (fetch)
pb     https://github.com/paulbone/ticgit (push)


shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxcursed/ticgit (master)
$
```

5.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxcursed/ticgit (master)
$ git fetch ~/desktop/zxcursed
remote: Enumerating objects: 11, done.
remote: Counting objects: 100% (11/11), done.
remote: Compressing objects: 100% (8/8), done.
remote: Total 11 (delta 2), reused 0 (delta 0), pack-reused 0 (from 0)
Unpacking objects: 100% (11/11), 865 bytes | 12.00 KiB/s, done.
From C:/Users/shadowfrlend/desktop/zxcursed
 * branch          HEAD      -> FETCH_HEAD

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxcursed/ticgit (master)
$
```

6.

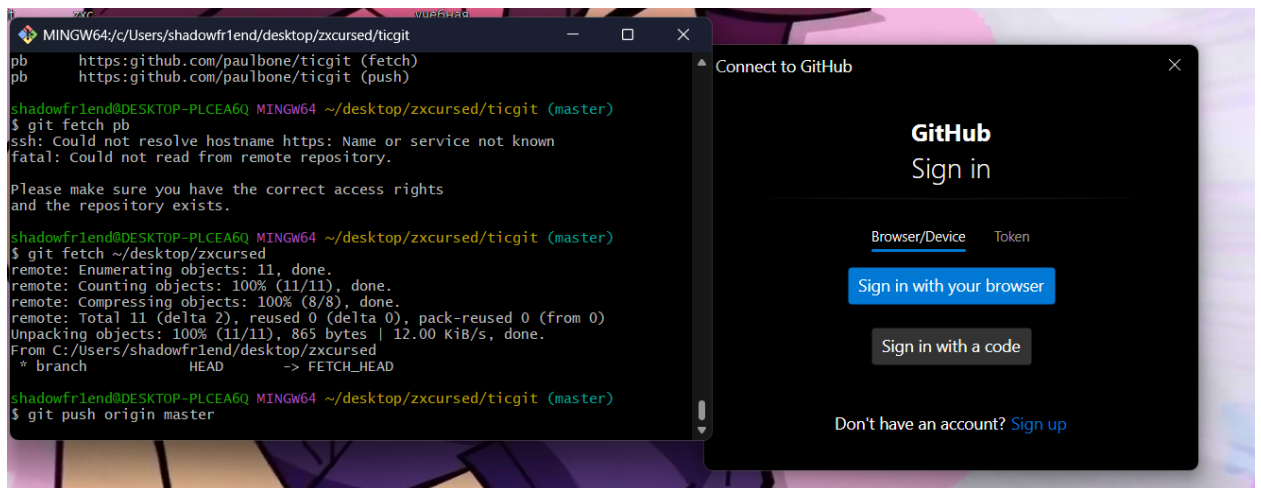

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxcursed/ticgit (master)
$ git push origin master
info: please complete authentication in your browser...
remote: Permission to schacon/ticgit.git denied to swagonocitel.
fatal: unable to access 'https://github.com/schacon/ticgit/': The requested URL returned error: 403

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxcursed/ticgit (master)
$

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxcursed/ticgit (master)
$ |
```

7.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxcursed/ticgit (master)
$ git remote show origin
* remote origin
Fetch URL: https://github.com/schacon/ticgit
Push URL: https://github.com/schacon/ticgit
HEAD branch: master
Remote branches:
  master tracked
  ticgit tracked
Local branch configured for 'git pull':
  master merges with remote master
Local ref configured for 'git push':
  master pushes to master (up to date)

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxcursed/ticgit (master)
$ |
```

8.

```
shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxcursed/ticgit (master)
$ git remote rename pb paul

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxcursed/ticgit (master)
$ git remote
origin
paul

shadowfr1end@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxcursed/ticgit (master)
$
```

9.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxcursed/ticgit (master)
$ git remote remove paul

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxcursed/ticgit (master)
$ git remote
origin

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxcursed/ticgit (master)
$ |
```

10.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxcursed/ticgit (master)
$ git tag
```

11.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ git tag -a v2.1 -m "My verison 2.1"
```

12.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ git tag
v2.1
ver1
ver1-beta

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$
```

13.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ git tag v2.1-lw

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ git tag
v2.1
v2.1-lw
ver1
ver1-beta

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ |
```

14.

```
$ git show v2.1-lw
commit 29ff77e48ca8eab02aa5e10dc923e88bb97300a9 (HEAD, tag: v2.1-lw, tag: v2.1)
Author: Igorek <mr.rogut@mail.ru>
Date: Sat Jun 7 20:59:04 2025 +0300

    Update zxc.html

diff --git a/lib/zxc.html b/lib/zxc.html
index 18acc6b..0750061 100644
--- a/lib/zxc.html
+++ b/lib/zxc.html
@@ -4,7 +4,6 @@
     <link rel="stylesheet" type="text/css" media="all" href="style.css">
   </head>
   <body>
-    <h1>tra la la la </h1>
-    <h2>Second line </h2>
+    <iframe src="lib/zxc.html" width="200" height="200"></iframe>
   </body>
</html>
\ No newline at end of file

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ |
```

15.

```
shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ git log --pretty=oneline
29ff77e48ca8eab02aa5e10dc923e88bb97300a9 (HEAD, tag: v2.1-lw, tag: v2.1) Update zxc.html
64752b4038fd0dd970c030cbb96dc28029575e6 zxc.html uses style.css
47b82a6935f6417cf1ece9e2953484f901133bf1 Added zxc.html
52012dcdf13195792984d3320aff722523d8dc20 Moved helo.html to lib
e55abd1263fe379e96fc3afc99db2e04431260 Add an author/email comment
e75a525dd93c170245d71ea59c95030554df7680 (tag: ver1-beta, tag: ver1, master) Add HTML header
8a424e574fe7131b62cb0f37d0246f22f2a5262a Added h2 tag xd
0ee81cc826f8bb371777f348a82ab6bc1a376022 Changes for a and b
a5692daed713990e72e06eadb2ac87040a5add51 First Commit

shadowfrlend@DESKTOP-PLCEA6Q MINGW64 ~/desktop/zxc (style|REBASE 6/6)
$ |
```

16.

Как и в прошлых заданиях, я столкнулся с ошибками, которые не смог решить и все последующие пункты которые я выполнял, сыпали меня ошибками