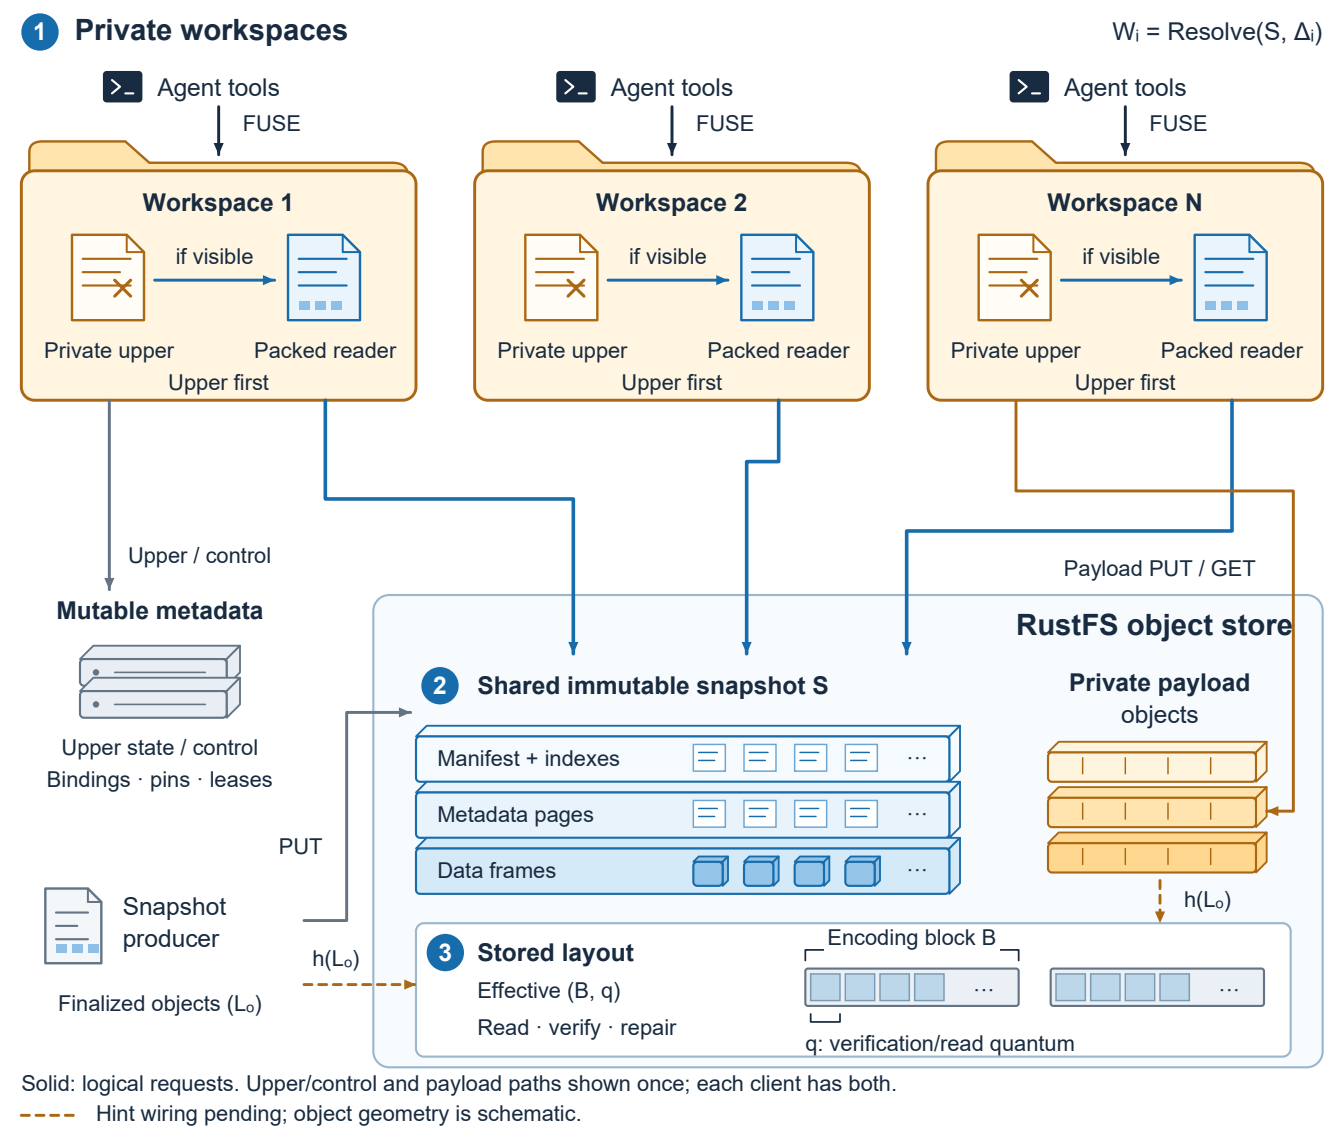

1 Private workspaces
$W_i = Resolve(S, \Delta_i)$
Agent tools
FUSE
Workspace 1
if visible
Private upper
Packed reader
Upper first
Agent tools
FUSE
Workspace 2
if visible
Private upper
Packed reader
Upper first
Agent tools
FUSE
Workspace N
if visible
Private upper
Packed reader
Upper first
Upper / control
Payload PUT / GET
Mutable metadata
Upper state / control
Bindings · pins · leases
RustFS object store
2 Shared immutable snapshot S
Manifest + indexes
Metadata pages
Data frames
Private payload objects
PUT
Snapshot producer
Finalized objects (L_o)
$h(L_o)$
$h(L_o)$
3 Stored layout
Effective (B, q)
Read · verify · repair
Encoding block B
q: verification/read quantum
Solid: logical requests. Upper/control and payload paths shown once; each client has both.
Hint wiring pending; object geometry is schematic.