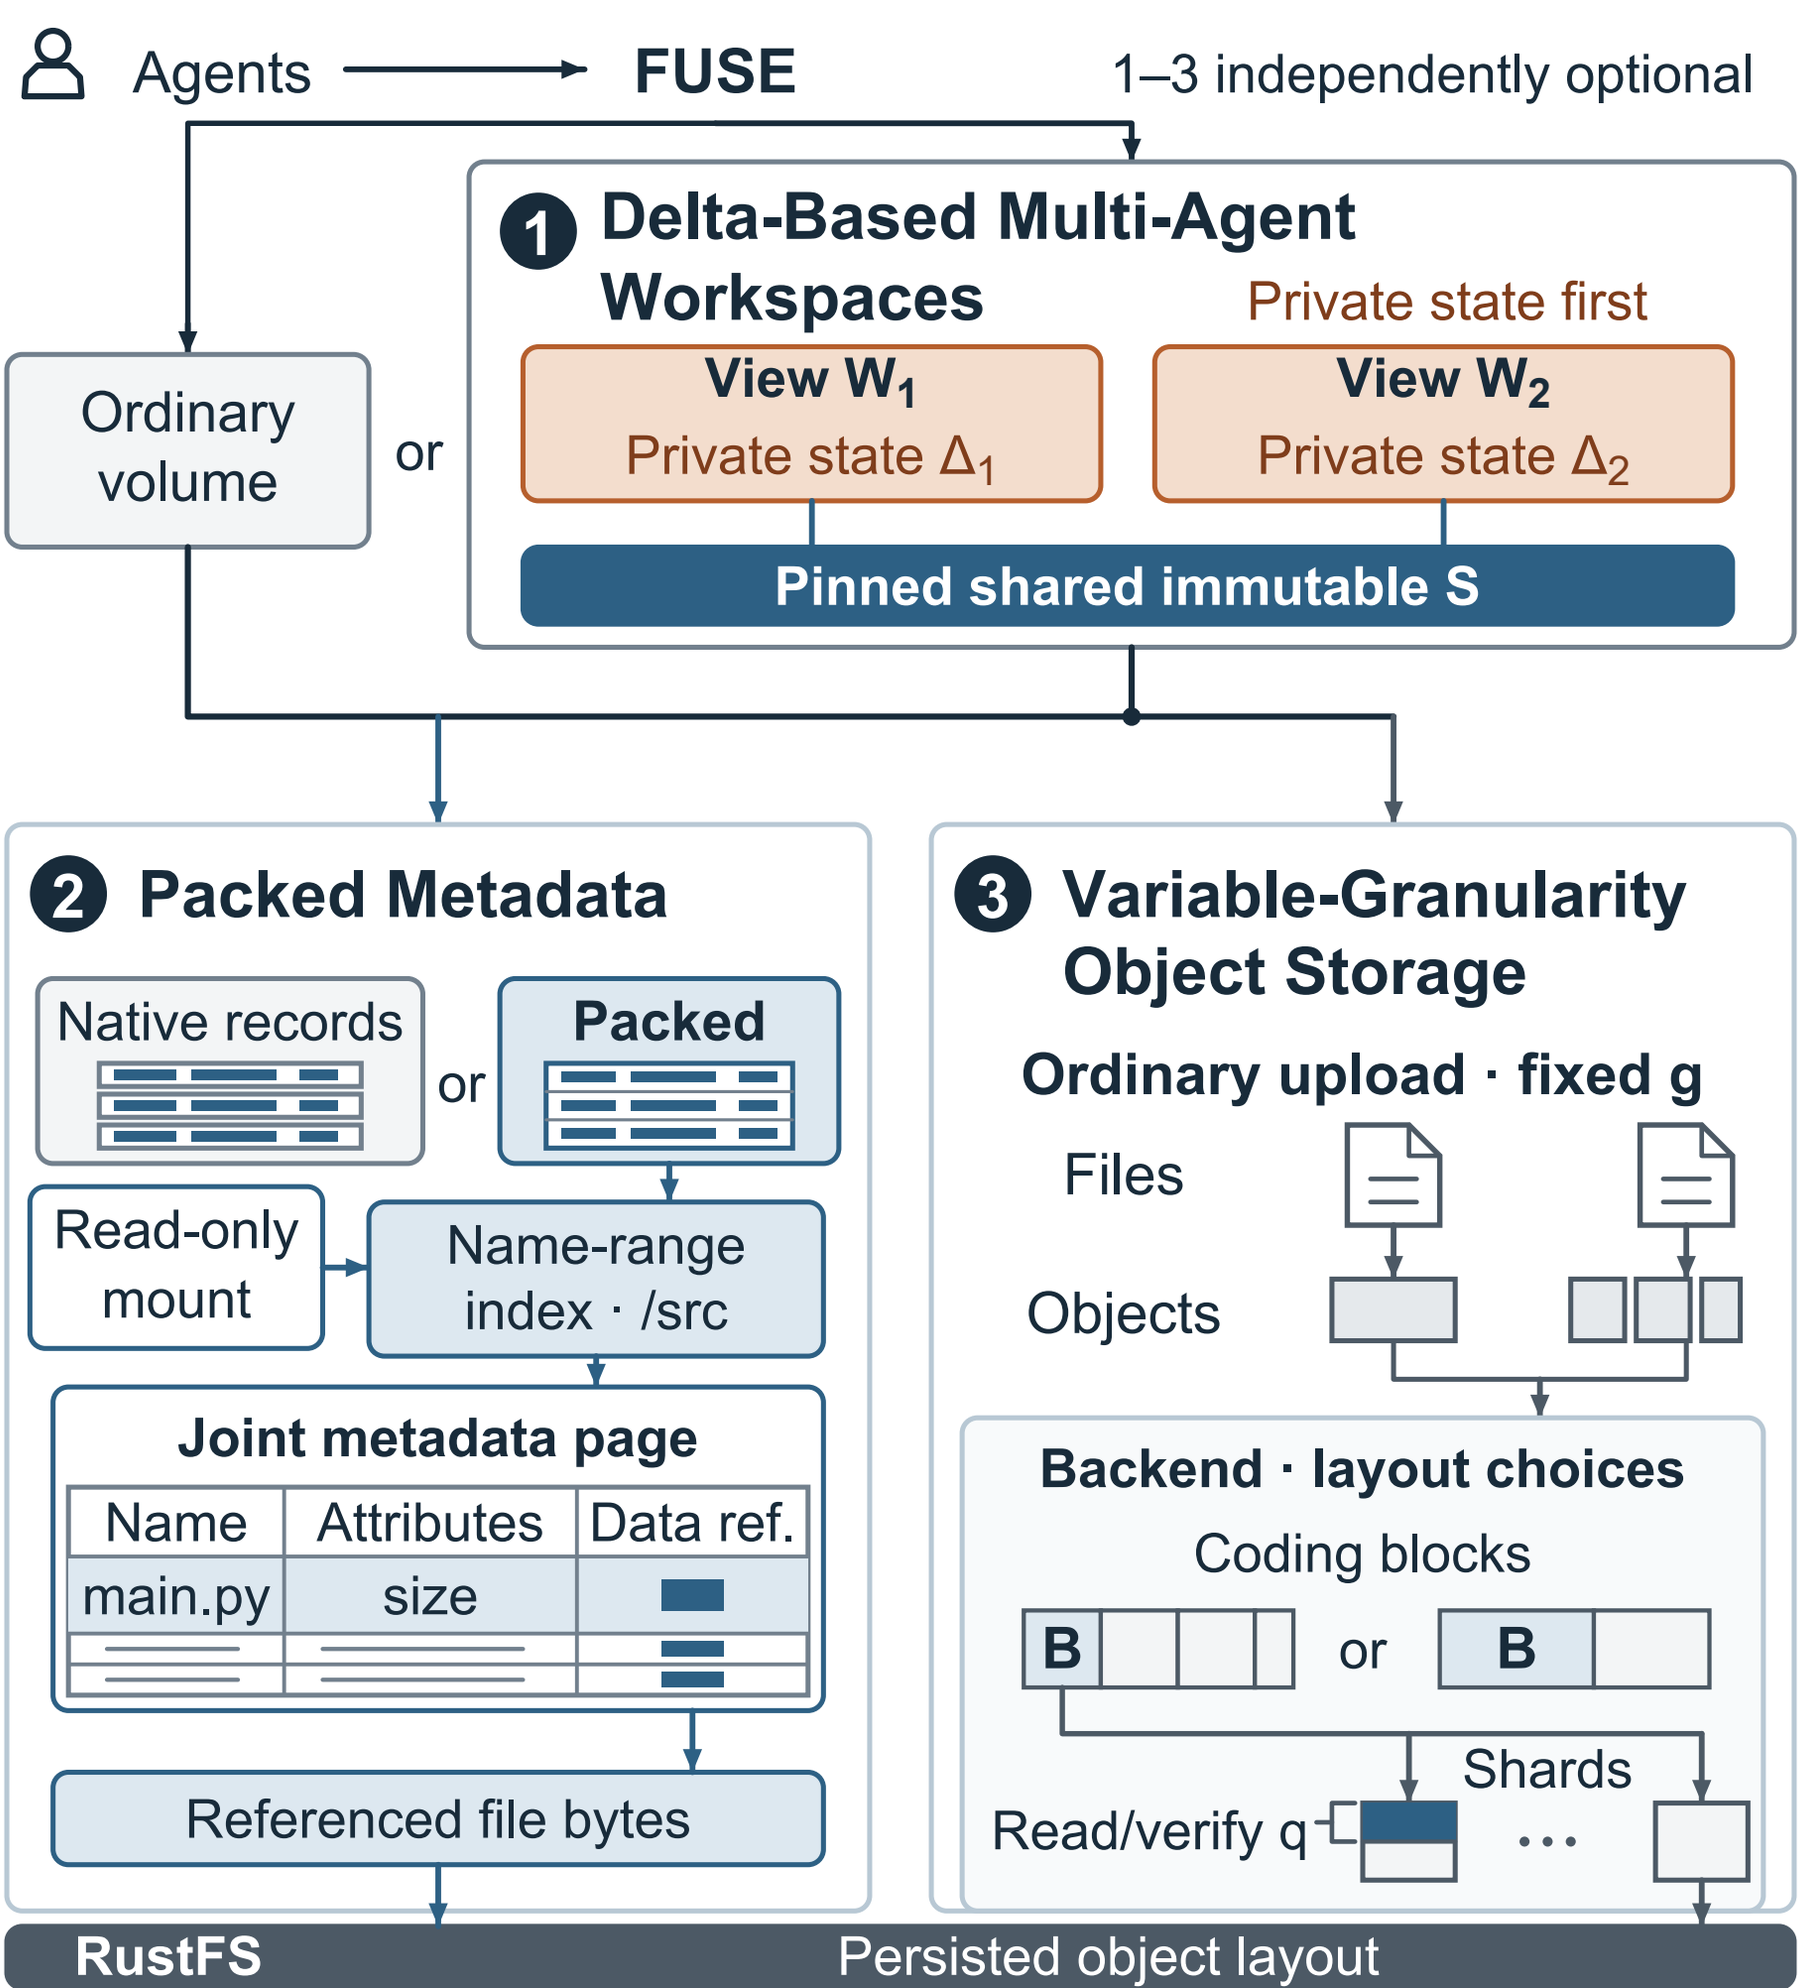

Agents
FUSE
1–3 independently optional
Ordinary volume
or
1 Delta-Based Multi-Agent Workspaces
Private state first
View W_1
Private state Δ_1
View W_2
Private state Δ_2
Pinned shared immutable S
2 Packed Metadata
Native records
or
Packed
Read-only mount
Name-range index · /src
Joint metadata page
Name
Attributes
Data ref.
main.py
size
Referenced file bytes
3 Variable-Granularity Object Storage
Ordinary upload · fixed g
Files
Objects
Backend · layout choices
Coding blocks
B
or
B
Shards
Read/verify q
RustFS
Persisted object layout