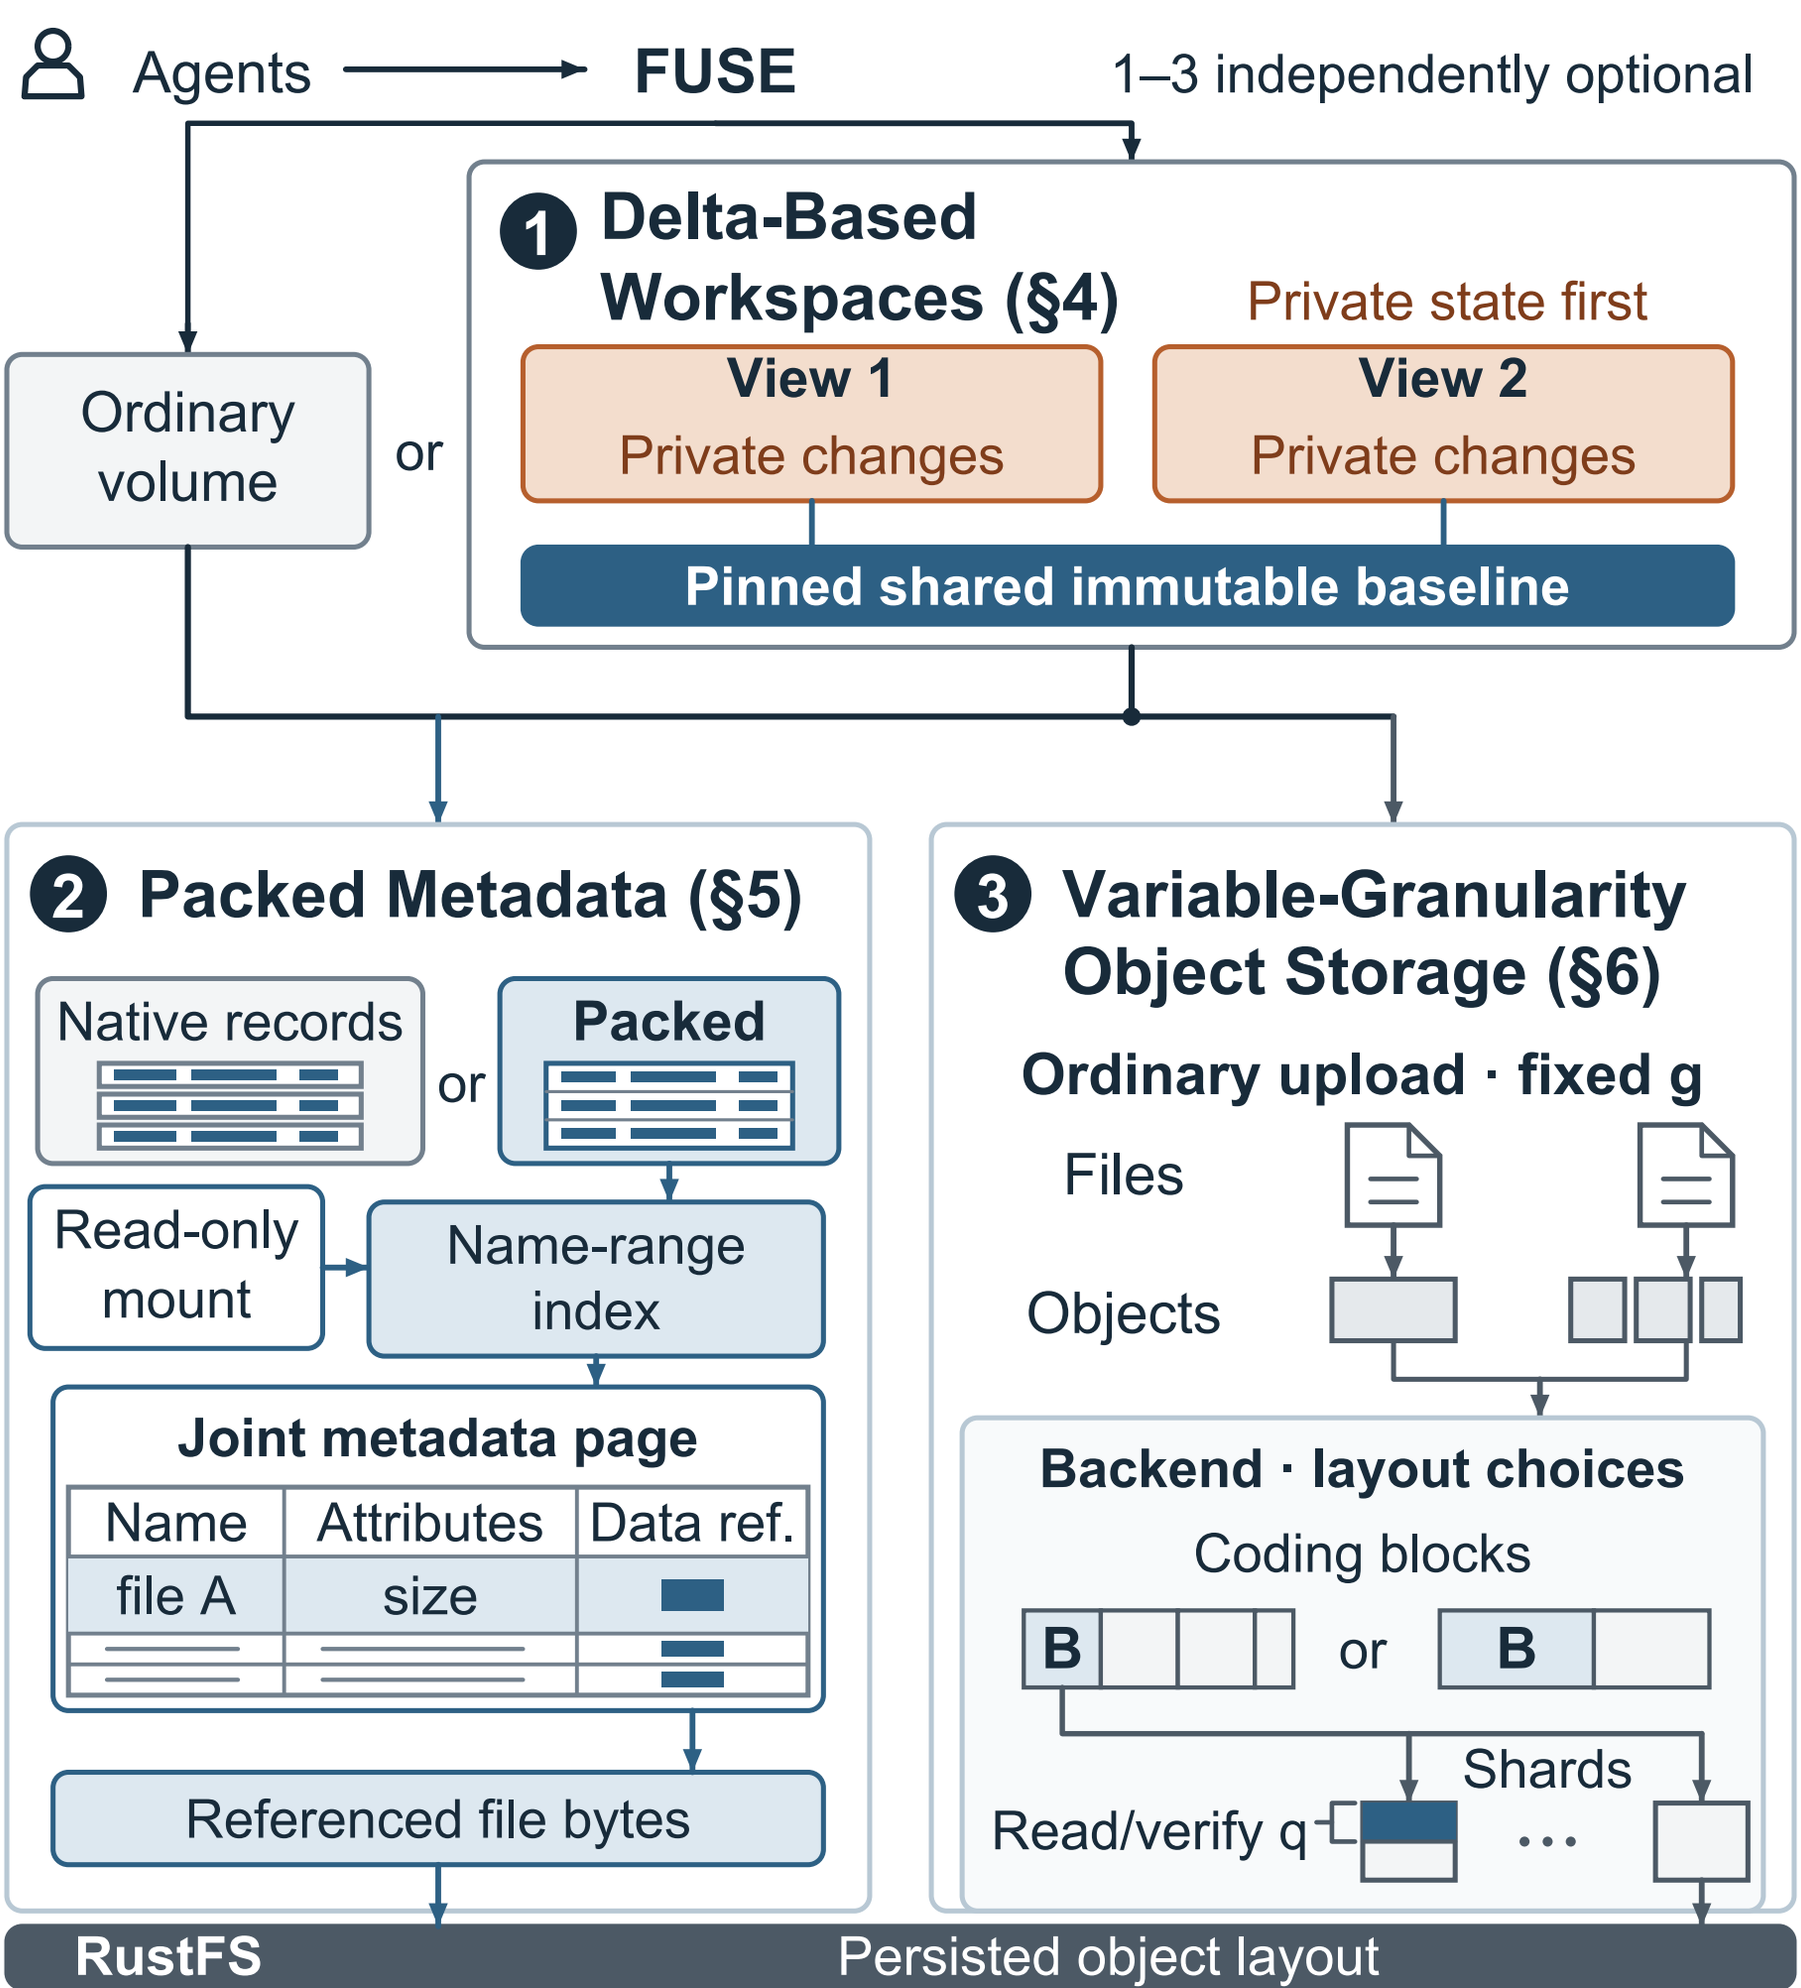

Agents
FUSE
1–3 independently optional
Ordinary volume
or
1 Delta-Based Workspaces (§4)
Private state first
View 1
Private changes
View 2
Private changes
Pinned shared immutable baseline
2 Packed Metadata (§5)
Native records
or
Packed
Read-only mount
Name-range index
Joint metadata page
Name
Attributes
Data ref.
file A
size
Referenced file bytes
3 Variable-Granularity Object Storage (§6)
Ordinary upload · fixed g
Files
Objects
Backend · layout choices
Coding blocks
B
or
B
Shards
Read/verify q
RustFS
Persisted object layout