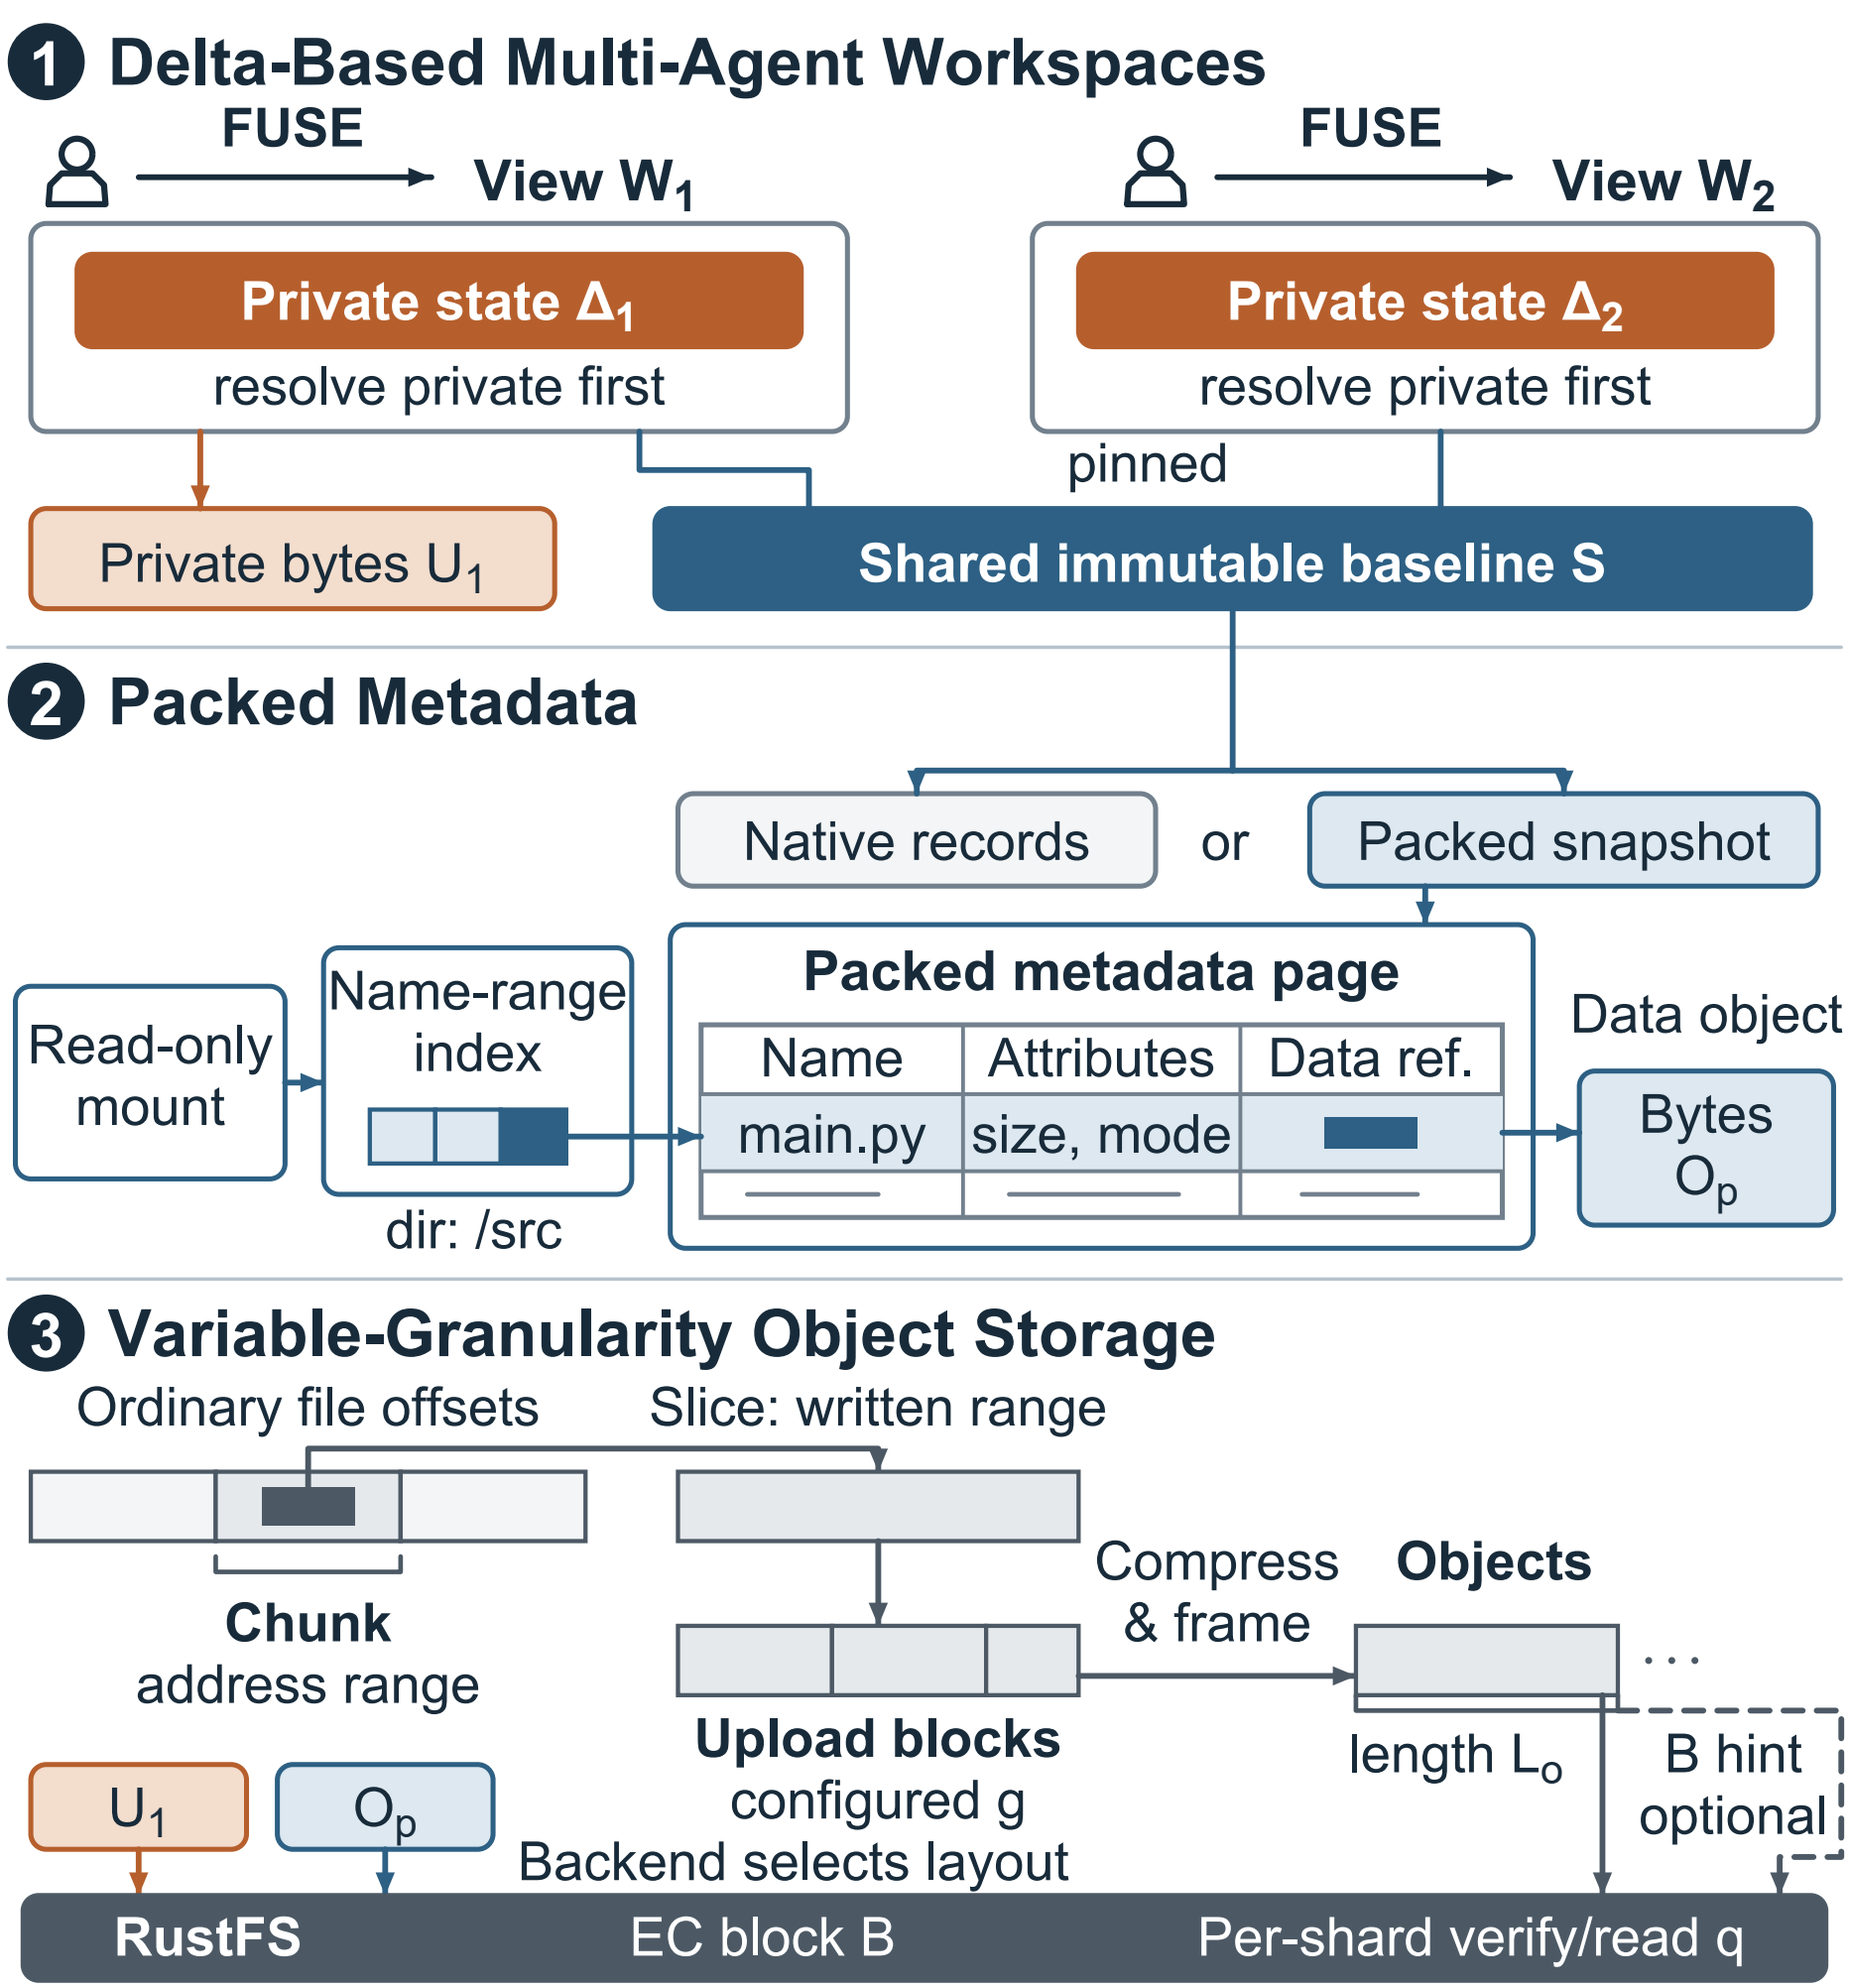

1 Delta-Based Multi-Agent Workspaces
FUSE
View W1
FUSE
View W2
Private state Δ1
resolve private first
Private state Δ2
resolve private first
pinned
Private bytes U1
Shared immutable baseline S
2 Packed Metadata
Native records
or
Packed snapshot
Read-only mount
Name-range index
dir: /src
Packed metadata page
Name
Attributes
Data ref.
main.py
size, mode
Data object
Bytes Op
3 Variable-Granularity Object Storage
Ordinary file offsets
Slice: written range
Chunk
address range
Compress & frame
Objects
Upload blocks
configured g
Backend selects layout
length Lo
B hint optional
U1
Op
RustFS
EC block B
Per-shard verify/read q