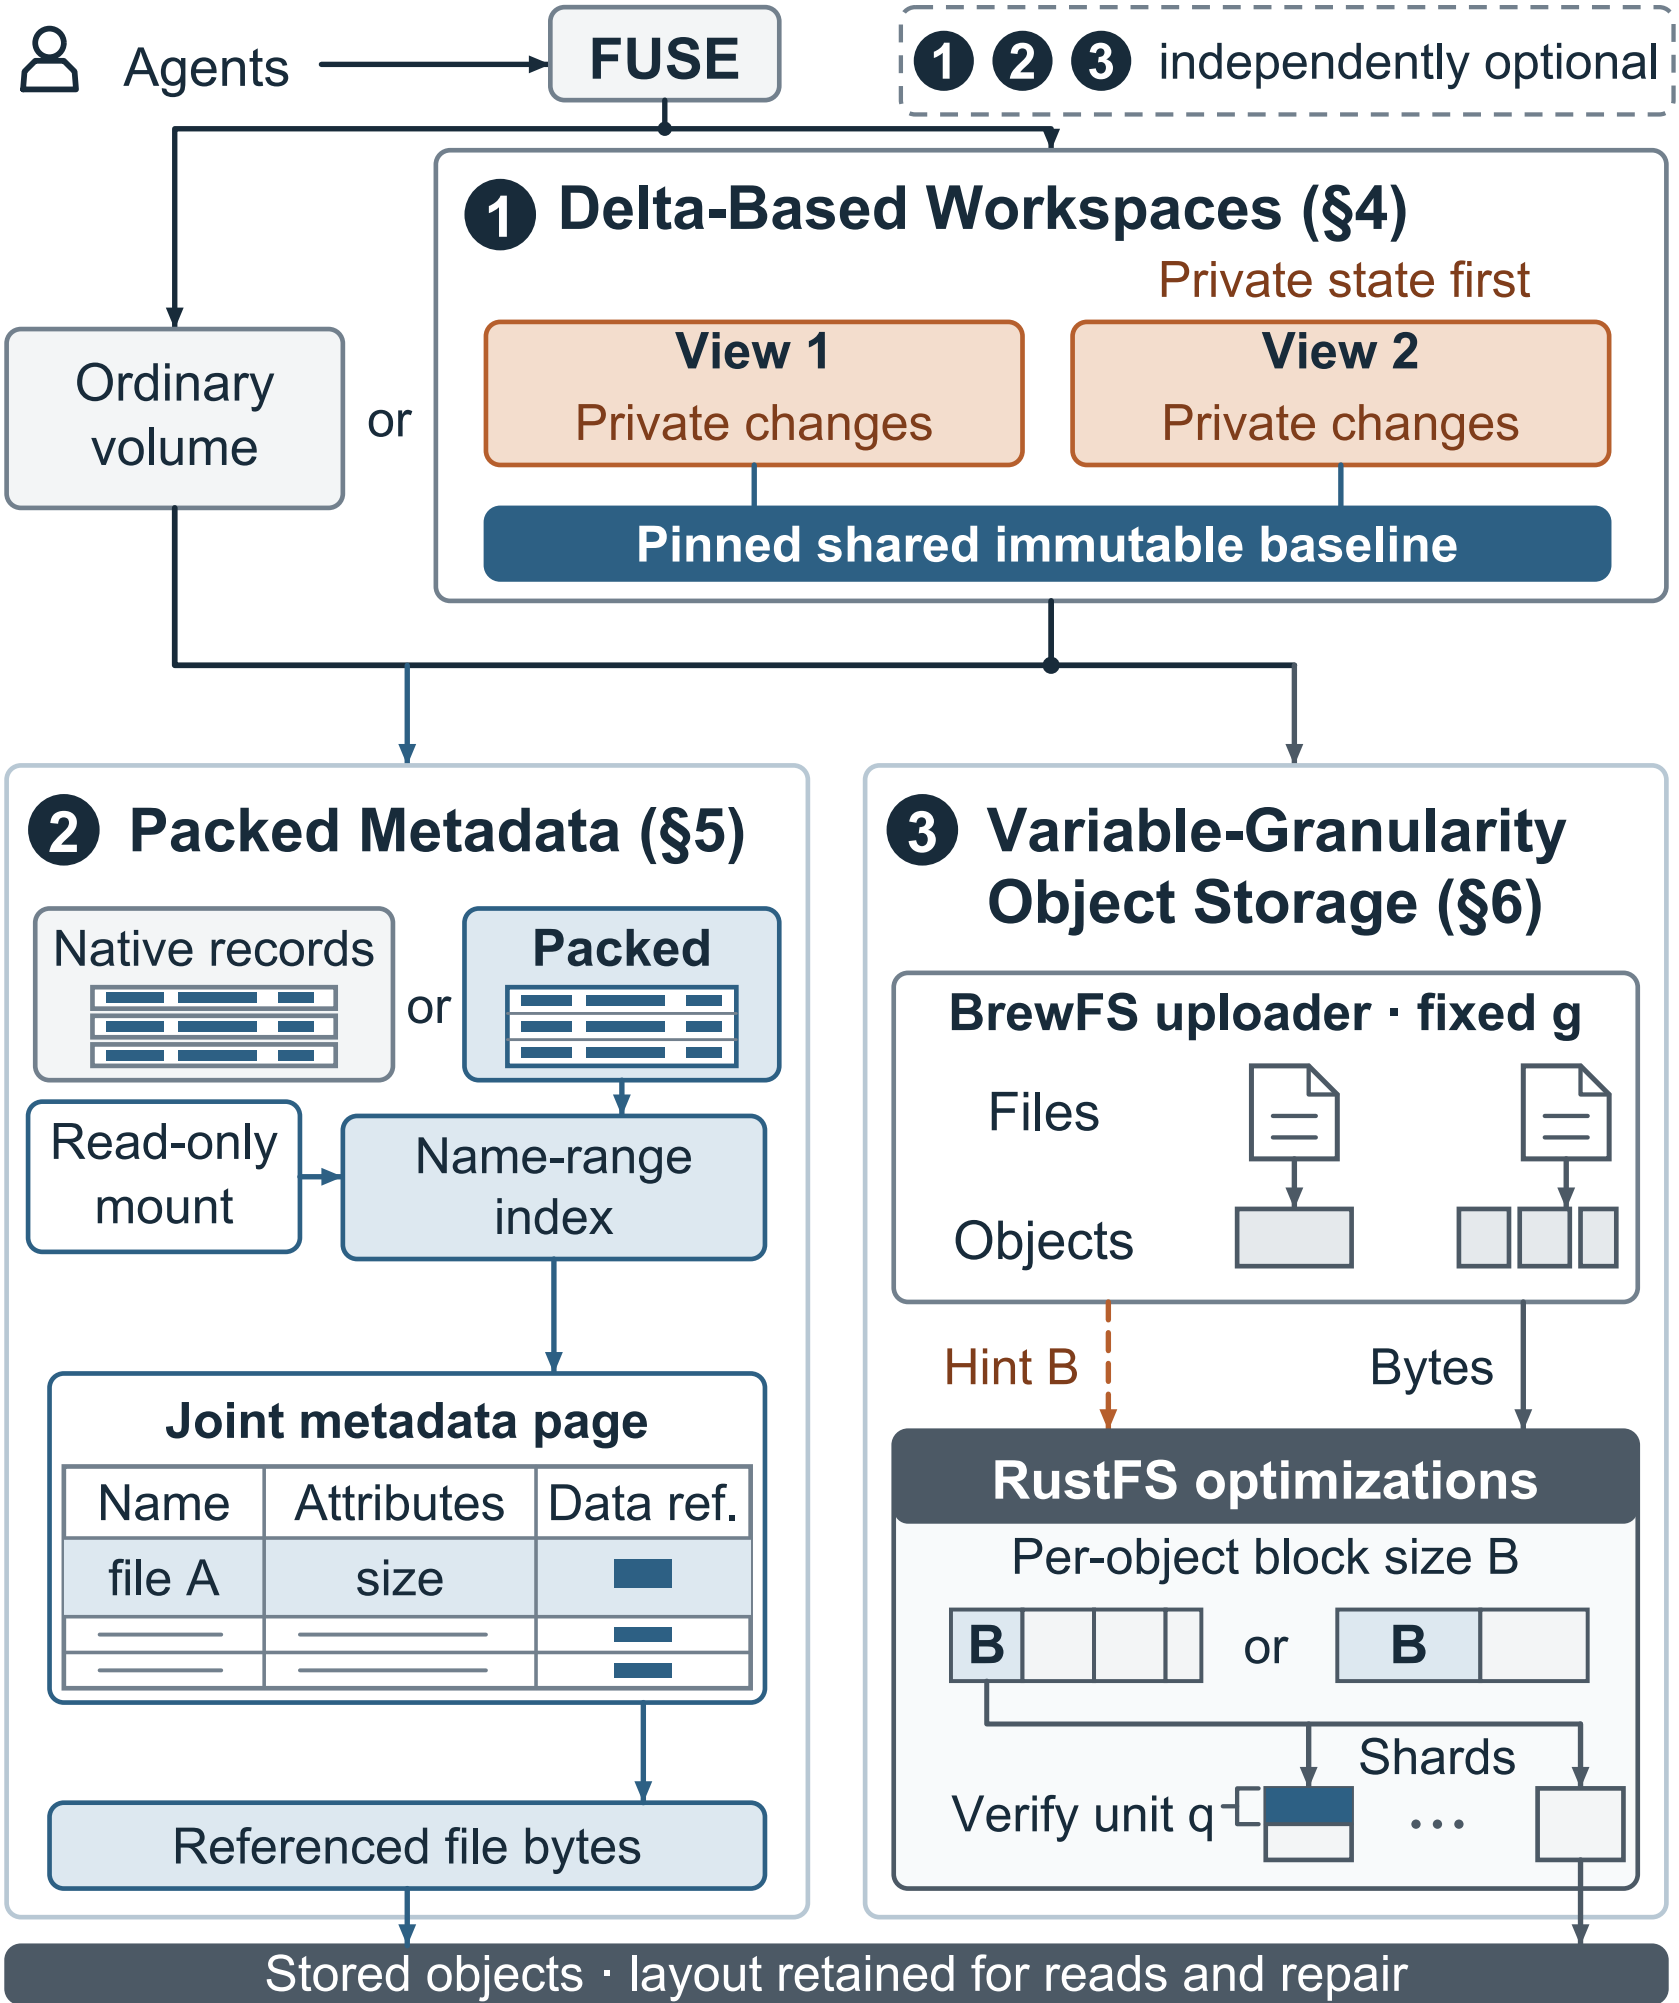

Agents
FUSE
1 2 3 independently optional
1 Delta-Based Workspaces (§4)
Private state first
Ordinary volume
or
View 1
Private changes
View 2
Private changes
Pinned shared immutable baseline
2 Packed Metadata (§5)
Native records
or
Packed
Read-only mount
Name-range index
Joint metadata page
Name
Attributes
Data ref.
file A
size
Referenced file bytes
3 Variable-Granularity Object Storage (§6)
BrewFS uploader · fixed g
Files
Objects
Hint B
Bytes
RustFS optimizations
Per-object block size B
B
or
B
Shards
Verify unit q
...
Stored objects · layout retained for reads and repair