


CREAR VISTAS

1.-Crear una vista con el nombre y la dirección de los institutos de Sagunto y Puerto llámala instituts_Sagunto.

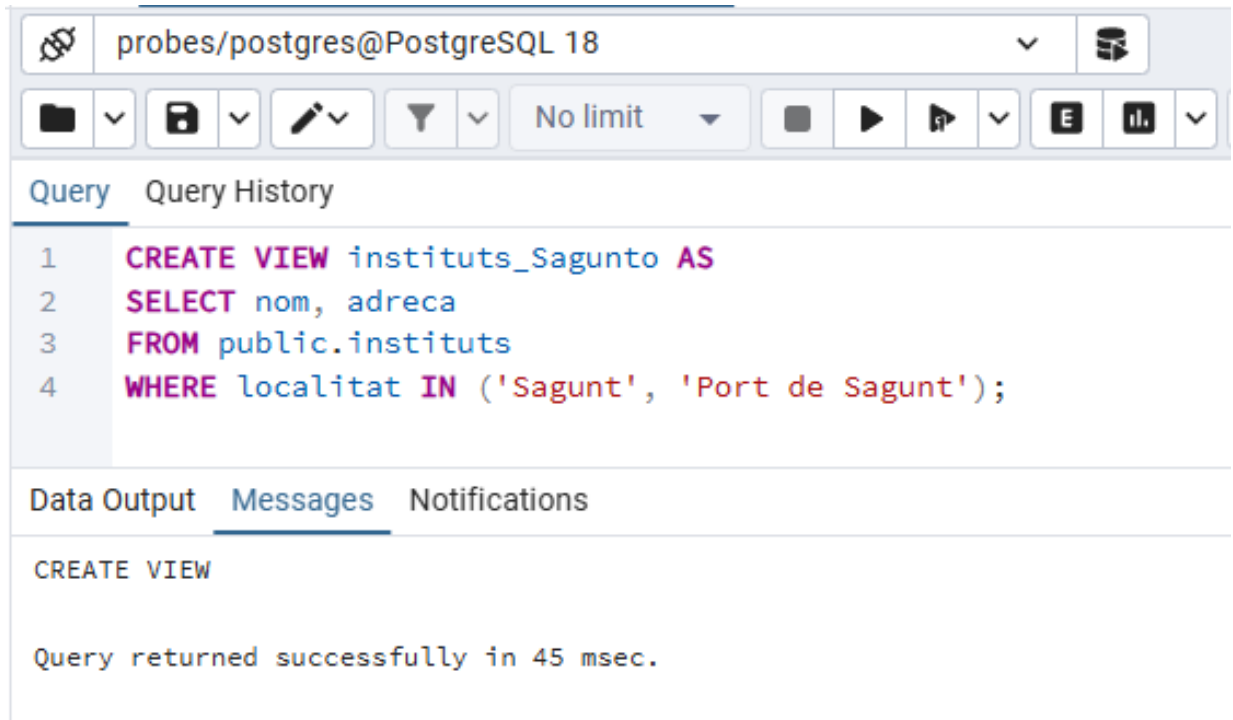

The screenshot shows a PostgreSQL query editor interface. The top bar indicates the connection is 'probes/postgres@PostgreSQL 18'. Below the toolbar, the 'Query' tab is active, displaying the following SQL code:

```
1 CREATE VIEW instituts_Sagunto AS
2 SELECT nom, adreca
3 FROM public.instituts
4 WHERE localitat IN ('Sagunt', 'Port de Sagunt');
```

Below the query editor, the 'Messages' tab is active, showing the execution result:

```
CREATE VIEW

Query returned successfully in 45 msec.
```

2.-Crea una vista materializada con el nombre y la dirección de los institutos de Sagunto y Puerto y llámala insti_Sagunto. Marca with Datos.



The screenshot shows a PostgreSQL query editor interface. The top bar indicates the connection is 'probes/postgres@PostgreSQL 18'. Below the toolbar, the 'Query' tab is active, displaying the following SQL code:

```
1 CREATE MATERIALIZED VIEW insti_Sagunto AS
2 SELECT nom, adreca
3 FROM public.instituts
4 WHERE localitat IN ('Sagunt', 'Port de Sagunt')
5 WITH DATA;
```

Below the query editor, the 'Messages' tab is active, showing the execution result:

```
SELECT 5

Query returned successfully in 35 msec.
```

3.- Realiza una select de cada vista

Query Query History

```
1 -- Select de la vista normal
2 SELECT * FROM instituts_Sagunto;
3
4 -- Select de la vista materializada
5 SELECT * FROM insti_Sagunto;
```

Data Output Messages Notifications

Showing rows: 1 to 5 Page No: 1

	nom character varying (60)	adreca character varying (100)
1	INSTITUT DE EDUCACIO SECUNDARIA CLOT DEL MORO	CLOT DEL MORO
2	INSTITUT DE EDUCACIO SECUNDARIA EDUARDO MERELLO	PERIODISTA AZZATI
3	INSTITUT DE EDUCACIO SECUNDARIA CAMP DE MORVE...	ABOGADO FAUSTO CARUANA
4	INSTITUT DE EDUCACIO SECUNDARIA MARIA MOLINER	DOLORES IBARRURI LA PASIONA...
5	INSTITUT DE EDUCACIO SECUNDARIA JORGE JUAN	ABOGADO FAUSTO CARUANA

4.- Actualiza la tabla institutos y al INSTITUT EDUCACIO SECUNDARIA CLOT DEL MORO ponle de nombre IES CLOT DEL MORO.

SQL x probes/postgres@... x public.insti_sagunt... x probes/postgres@PostgreSQL 18 x public.i

probes/postgres@PostgreSQL 18

No limit

Query Query History

```
1 UPDATE public.instituts
2 SET nom = 'IES CLOT DEL MORO'
3 WHERE nom = 'INSTITUT DE EDUCACIO SECUNDARIA CLOT DEL MORO';
4
```

Data Output Messages Notifications

UPDATE 1

Query returned successfully in 34 msec.

5.- Realiza una select sobre la vista instituts_sagunto y comprueba si ha cambiado.

SQL x probes/postgres@... x public.insti_sagunt... x public.instituts_sagunto/probes/postgres@PostgreSQL 18 x

public.instituts_sagunto/probes/postgres@PostgreSQL 18

No limit

Query Query History

```
1 SELECT * FROM public.instituts_sagunto
2
```

Data Output Messages Notifications

Showing rows: 1 to 5 Page No: 1 of 1

	nom character varying (60)	adreca character varying (100)
1	INSTITUT DE EDUCACIO SECUNDARIA EDUARDO MERELLO	PERIODISTA AZZATI
2	INSTITUT DE EDUCACIO SECUNDARIA CAMP DE MORVE...	ABOGADO FAUSTO CARUANA
3	INSTITUT DE EDUCACIO SECUNDARIA MARIA MOLINER	DOLORES IBARRURI LA PASIONA...
4	INSTITUT DE EDUCACIO SECUNDARIA JORGE JUAN	ABOGADO FAUSTO CARUANA
5	IES CLOT DEL MORO	CLOT DEL MORO

6.- Realiza una select sobre la vista materializada y ¿qué ha pasado?

SQL x probes/postgres@PostgreSQL 18* x public.insti_sagunt... x public.instituts_sa... x

probes/postgres@PostgreSQL 18

Query Query History

```
1 SELECT * FROM insti_sagunto;
```

Data Output Messages Notifications

Showing rows: 1 to 5 Page No: 1

	nom character varying (60)	adreca character varying (100)
1	INSTITUT DE EDUCACIO SECUNDARIA CLOT DEL MORO	CLOT DEL MORO
2	INSTITUT DE EDUCACIO SECUNDARIA EDUARDO MERELLO	PERIODISTA AZZATI
3	INSTITUT DE EDUCACIO SECUNDARIA CAMP DE MORVE...	ABOGADO FAUSTO CARUANA
4	INSTITUT DE EDUCACIO SECUNDARIA MARIA MOLINER	DOLORES IBARRURI LA PASIONA...
5	INSTITUT DE EDUCACIO SECUNDARIA JORGE JUAN	ABOGADO FAUSTO CARUANA

Query Query History

```
1 REFRESH MATERIALIZED VIEW insti_Sagunto;
```

Data Output Messages Notifications

REFRESH MATERIALIZED VIEW

Query returned successfully in 59 msec.

Query Query History

```
1 SELECT * FROM public.insti_sagunto
2
```

Data Output Messages Notifications

Showing rows: 1 to 5 Page No

	nom character varying (60)	adreca character varying (100)
1	INSTITUT DE EDUCACIO SECUNDARIA EDUARDO MERELLO	PERIODISTA AZZATI
2	INSTITUT DE EDUCACIO SECUNDARIA CAMP DE MORVE...	ABOGADO FAUSTO CARUANA
3	INSTITUT DE EDUCACIO SECUNDARIA MARIA MOLINER	DOLORES IBARRURI LA PASIONA...
4	INSTITUT DE EDUCACIO SECUNDARIA JORGE JUAN	ABOGADO FAUSTO CARUANA
5	IES CLOT DEL MORO	CLOT DEL MORO

7.- Crea una vista de los datos de las poblaciones con más de 400 habitantes.

The screenshot shows a PostgreSQL query editor interface. The query editor has tabs for 'Query' and 'Query History'. The 'Query' tab is active, showing a SQL query to create a view. The query is as follows:

```
1 CREATE VIEW poblacions_grandes AS
2 SELECT *
3 FROM public.poblacions
4 WHERE poblacio > 400;
```

Below the query editor, there are tabs for 'Data Output', 'Messages', and 'Notifications'. The 'Messages' tab is active, showing the following message:

```
CREATE VIEW

Query returned successfully in 36 msec.
```

8.- ¿Cuántas poblaciones hay con más de 400 habitantes?

The screenshot shows a PostgreSQL query editor interface. The query editor has tabs for 'Query' and 'Query History'. The 'Query' tab is active, showing a SQL query to count the number of populations with more than 400 inhabitants. The query is as follows:

```
1 SELECT COUNT(*) AS Num FROM poblacions_grandes;
```

Below the query editor, there are tabs for 'Data Output', 'Messages', and 'Notifications'. The 'Data Output' tab is active, showing the following data:

	num bigint
1	22

9.- ¿Y con menos de 400 habitantes?

The screenshot shows a PostgreSQL query editor interface. The query editor has tabs for 'Query' and 'Query History'. The 'Query' tab is active, showing a SQL query to count the number of populations with fewer than 400 inhabitants. The query is as follows:

```
1 SELECT COUNT(*)
2 FROM public.poblacions
3 WHERE poblacio < 400;
```

Below the query editor, there are tabs for 'Data Output', 'Messages', and 'Notifications'. The 'Data Output' tab is active, showing the following data:

	count bigint
1	0