

Database Design Project

Oracle Baseball League Store Database

Project Scenario:

You are a small consulting company specializing in database development. You have just been awarded the contract to develop a data model for a database application system for a small retail store called Oracle Baseball League (OBL).

The Oracle Baseball League store serves the entire surrounding community selling baseball kit. The OBL has two types of customer, there are individuals who purchase items like balls, cleats, gloves, shirts, screen printed t-shirts, and shorts. Additionally customers can represent a team when they purchase uniforms and equipment on behalf of the team.

Teams and individual customers are free to purchase any item from the inventory list, but teams get a discount on the list price depending on the number of players. When a customer places an order we record the order items for that order in our database.

OBL has a team of three sales representatives that officially only call on teams but have been known to handle individual customer complaints.

Section 6 Lesson 4 Exercise 1: Data Manipulation Language

Use DML operations to manage database tables (S6L4 Objective 2)

In this exercise you will populate and work with the data that is stored in the database system tables.

Part 1 : Running a script to populate the tables.

You have to consider the order of the tables when populating them. A table that has a foreign key field cannot be populated before the related table with the primary key.

1. Use the table mapping document and list the order that you would use to populate the tables.
2. Open the “sports data.sql” and look at the order the data is being added there, does your list match? This file can be found in the Section 6 Lesson 4 interaction (sports data.zip) and must first be extracted.
3. Run the “sports data.sql” script in APEX to populate your tables
4. Check that no errors occurred when you ran the script.

Part 2- Inserting rows to the system

1. Add a new team to the system

id	name	Number_of_players	discount
t004	Jets	10	5

2. Add a new Customer with the following details to the system

ctr number	email	First name	Last name	Phone number	Current balance	Loyalty card number	tem id	sre id
c02001	brianrog@hootech.com	Brian	Rogers	01654564898	-5	lc4587		

3. This information violates the check constraint that the current balance must not be less than zero. Change the current balance to 50 and rerun the query.

Database Design Project

Oracle Baseball League Store Database

Project Scenario:

You are a small consulting company specializing in database development. You have just been awarded the contract to develop a data model for a database application system for a small retail store called Oracle Baseball League (OBL).

The Oracle Baseball League store serves the entire surrounding community selling baseball kit. The OBL has two types of customer, there are individuals who purchase items like balls, cleats, gloves, shirts, screen printed t-shirts, and shorts. Additionally customers can represent a team when they purchase uniforms and equipment on behalf of the team.

Teams and individual customers are free to purchase any item from the inventory list, but teams get a discount on the list price depending on the number of players. When a customer places an order we record the order items for that order in our database.

OBL has a team of three sales representatives that officially only call on teams but have been known to handle individual customer complaints.

Section 6 Lesson 4 Exercise 2: Data Manipulation Language

Use DML operations to manage database tables (S6L4 Objective 2)

In this exercise you will populate and work with the data that is stored in the database system.

Part 1- Updating rows to the system

1. Run the following query to view the content of the price_history table:

```
SELECT start_date, TO_CHAR (start_time, 'HH24:MI:SS'), price, end_date, TO_CHAR  
(end_time, 'HH24:MI:SS')  
FROM price_history;
```

2. Obl is going to update the price of the premium bat so you will need to write a query that will close off the current price by adding the system date values to the end_date and end_time fields. To run this query you will need to both match the item number and identify that the end date is null. This ensures that you are updating the latest price.
3. Rerun the select statement on the price_history table to ensure that the statement has been executed.
4. Insert a new row that will use the current date and time to set the new price of the premium bat to be 99.99.
5. Rerun the select statement on the price_history table to ensure that the statement has been executed.

Part 2: Deleting rows from the system

1. Bob Thornberry has contacted Obl to ask that the 83 Barrhill Drive address be removed from the system as he can no longer receive parcels at this address. Write a SQL statement that will remove this address from the system.
2. Run a select statement on the customers_addresses table to ensure that the statement has been executed.

SQL 2 (DML1-Part 1)

Part 4 :

1. inventory - list
2. items
3. price - history
4. sales - representative
5. sales - rep - addresses
6. teams
7. customers
8. customers - addresses
9. orders
10. ordered - items

ii) Yes, the order is matching

iii)

The screenshot displays the Microsoft Access interface. The top toolbar includes icons for opening files, saving, undo, redo, and other standard functions. Below the toolbar, there are two tabs: "Worksheet" and "Query Builder". The "Query Builder" tab is active, showing a SQL query in the design grid.

```
INSERT INTO ordered_items (quantity_ordered, quantity_shipped, odr_id, itm_number)
VALUES(5, 5, 'or0101250', 'im01101044');

INSERT INTO ordered_items (quantity_ordered, quantity_shipped, odr_id, itm_number)
VALUES(5, 5, 'or0101250', 'im01101046');

INSERT INTO ordered_items (quantity_ordered, quantity_shipped, odr_id, itm_number)
VALUES(5, 5, 'or0101350', 'im01101044');

INSERT INTO ordered_items (quantity_ordered, quantity_shipped, odr_id, itm_number)
VALUES(18, 18, 'or0101425', 'im01101047');

INSERT INTO ordered_items (quantity_ordered, quantity_shipped, odr_id, itm_number)
VALUES(10, 10, 'or0101681', 'im01101047');

INSERT INTO ordered_items (quantity_ordered, quantity_shipped, odr_id, itm_number)
VALUES(1, 1, 'or0101750', 'im01101048');
```


Below the query editor, the "Script Output" window shows the results of executing the query. It indicates that the task was completed in 0.584 seconds and lists six rows inserted:

- 1 row inserted.
- 1 row inserted.
- 1 row inserted.
- 1 row inserted.
- 1 row inserted.
- 1 row inserted.

The bottom status bar shows "Declaration:" followed by a blank space.

Part 2 :

1.

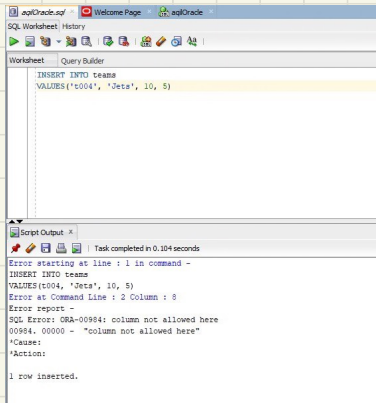

The screenshot shows the SQL Developer interface. The 'Query Builder' tab is active, displaying the following SQL statement:

```
INSERT INTO teams  
VALUES('c004', 'Deta', 10, 5)
```

The 'Script Output' window at the bottom shows the following error message:

```
Task completed in 0.104 seconds  
Error starting at line : 1 in command -  
INSERT INTO teams  
VALUES('c004', 'Deta', 10, 5)  
Error at Command line : 2 Column : 5  
Error report -  
SQL Error: ORA-00954: column not allowed here  
00954. 00000 - "column not allowed here"  
*Cause:  
*Action:  
1 row inserted.
```

2.

INSERT INTO customers

```
VALUES ('c02001', 'brianrog@hoootech.com', 'Brian', 'Rogers', '01654564899', -5,  
NULL, NULL, 'Ic 4597');
```

3.

INSERT INTO customers

```
VALUES ('c02001', 'brianrog@hoootech.com', 'Brian', 'Rogers', '01654564899', 50,  
NULL, NULL, 'Ic 4597');
```

SQL2 - (DML1 - Part 2)

Part 1

1)

START_DATE	TO_CHAR(START_TIME, 'HH24:MI:SS')	PRICE	END_DATE	TO_CHAR(END_TIME, 'HH24:MI')
25-NOV-16	09:00:00	14.99	25-JAN-17	17:00
25-JAN-17	17:01:00	8.99	25-JAN-17	19:00
26-JAN-17	09:00:00	15.99	-	-
12-FEB-17	12:30:00	7.99	-	-
25-APR-17	10:10:10	24.99	-	-
31-MAY-17	16:35:30	149	-	-
17-JUN-17	09:00:00	4.99	-	-

2)

```
UPDATE price_history  
SET end-date = SYSDATE  
    end-time = SYSTIMESTAMP  
WHERE itm-number = 'im01101048'  
AND end-date is NULL;
```

3)

	START_DATE	START_TIME	PRICE	END_DATE	END_TIME	ITM_NUMBER
1	17/06/2017	17/06/2016	4.99 (null)	(null)	(null)	im01101044
2	25/11/2016	25/11/2016	14.99 25/01/2017	25/01/2017	25/01/2017	im01101045
3	25/01/2017	25/01/2017	8.99 25/01/2017	25/01/2017	25/01/2017	im01101045
4	26/01/2017	26/01/2017	15.99 (null)	(null)	(null)	im01101045
5	12/02/2017	12/02/2017	7.99 (null)	(null)	(null)	im01101046
6	25/04/2017	25/04/2017	24.99 (null)	(null)	(null)	im01101047
7	31/05/2017	31/05/2017	149 10/11/2023	10/11/2023	10/11/2023	im01101048

4)

```
INSERT INTO price_history (start-time, price, itm-number)  
VALUES (SYSDATE, SYSTIMESTAMP, 99.99, 'im01101048');
```

5)

	START_DATE	START_TIME	PRICE	END_DATE	END_TIME	ITM_NUMBER
1	17/06/2017	17/06/2016	4.99 (null)	(null)	(null)	im01101044
2	25/11/2016	25/11/2016	14.99 25/01/2017	25/01/2017	25/01/2017	im01101045
3	25/01/2017	25/01/2017	8.99 25/01/2017	25/01/2017	25/01/2017	im01101045
4	26/01/2017	26/01/2017	15.99 (null)	(null)	(null)	im01101045
5	12/02/2017	12/02/2017	7.99 (null)	(null)	(null)	im01101046
6	25/04/2017	25/04/2017	24.99 (null)	(null)	(null)	im01101047
7	31/05/2017	31/05/2017	149 (null)	(null)	(null)	im01101048
8	10/11/2023	10/11/2023	99.99 (null)	(null)	(null)	im01101048

Part 2 :

1. DELETE FROM customers_addresses
WHERE address_line_1 = '83 Barnhill Drive';

2. SELECT * FROM customers_addresses;

ID	ADDRESS_LINE_1	ADDRESS_LINE_2	CITY	ZIP_CODE	CTR_NUMBER
1	ca0102 17	Gartsquare Road	Starford	Liverpool L689JHK	c00001
2	ca0103 54	Ropehill Crescent	Georgetown	Star ST45AGV	c00101
3	ca0104 36	Watercross Lane	(null)	Jump JF23YTH	c01986
4	ca0105 63	Acacia Drive	Skins	Liverpool L683JHR	c00001