Compile with: g++ -Wall –Werror main.cpp

Run with: ./a.out

```
=== Round 3 ===
Voter 0 is voting No
Voter 1 is voting Yes
Voter 2 is voting No
Voter 3 is voting No
No has won this round (3 No vs 1 Yes)

=== Round 4 ===
Voter 0 is voting No
Voter 1 is voting No
Voter 2 is voting Yes
Voter 3 is voting Yes
it is a tie

=== Round 5 ===
Voter 0 is voting Yes
Voter 1 is voting No
Voter 2 is voting Yes
Voter 3 is voting Yes
Yes has won this round (3 Yes vs 1 No)

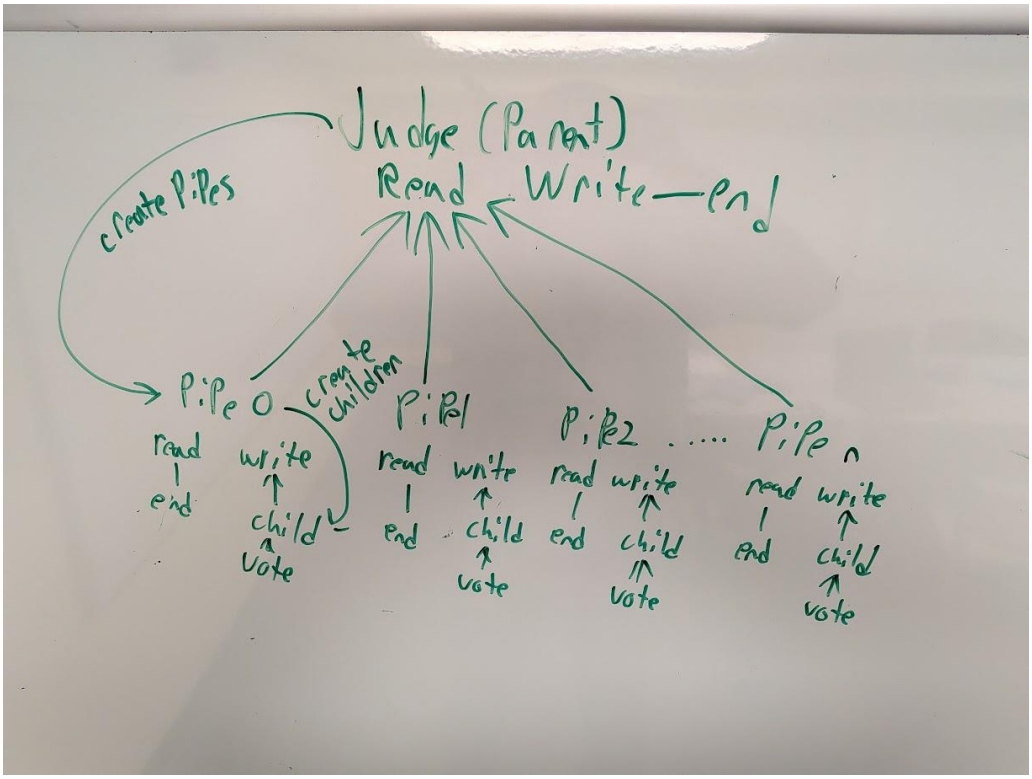
=== Round 6 ===
Voter 0 is voting No
Voter 1 is voting No
Voter 2 is voting No
Voter 3 is voting No
No has won this round (4 No vs 0 Yes)
```

```
Enter the number of rounds you would like to have: 4
Enter the number of voters: 4
Voter 0 is voting No
Voter 1 is voting Yes

Voter 2 is voting No
=== Round 1 ===
Voter 3 is voting Yes
it is a tie

=== Round 2 ===
Voter 0 is voting No
Voter 3 is voting Yes
Voter 1 is voting Yes
Voter 2 is voting No
it is a tie

=== Round 3 ===
Voter 0 is voting No
```


Judge (Parent)
Read
Write
End
create Pipes
Pipe 0
create children
Pipe 1
Pipe 2
.....
Pipe n
read
end
write
child
vote