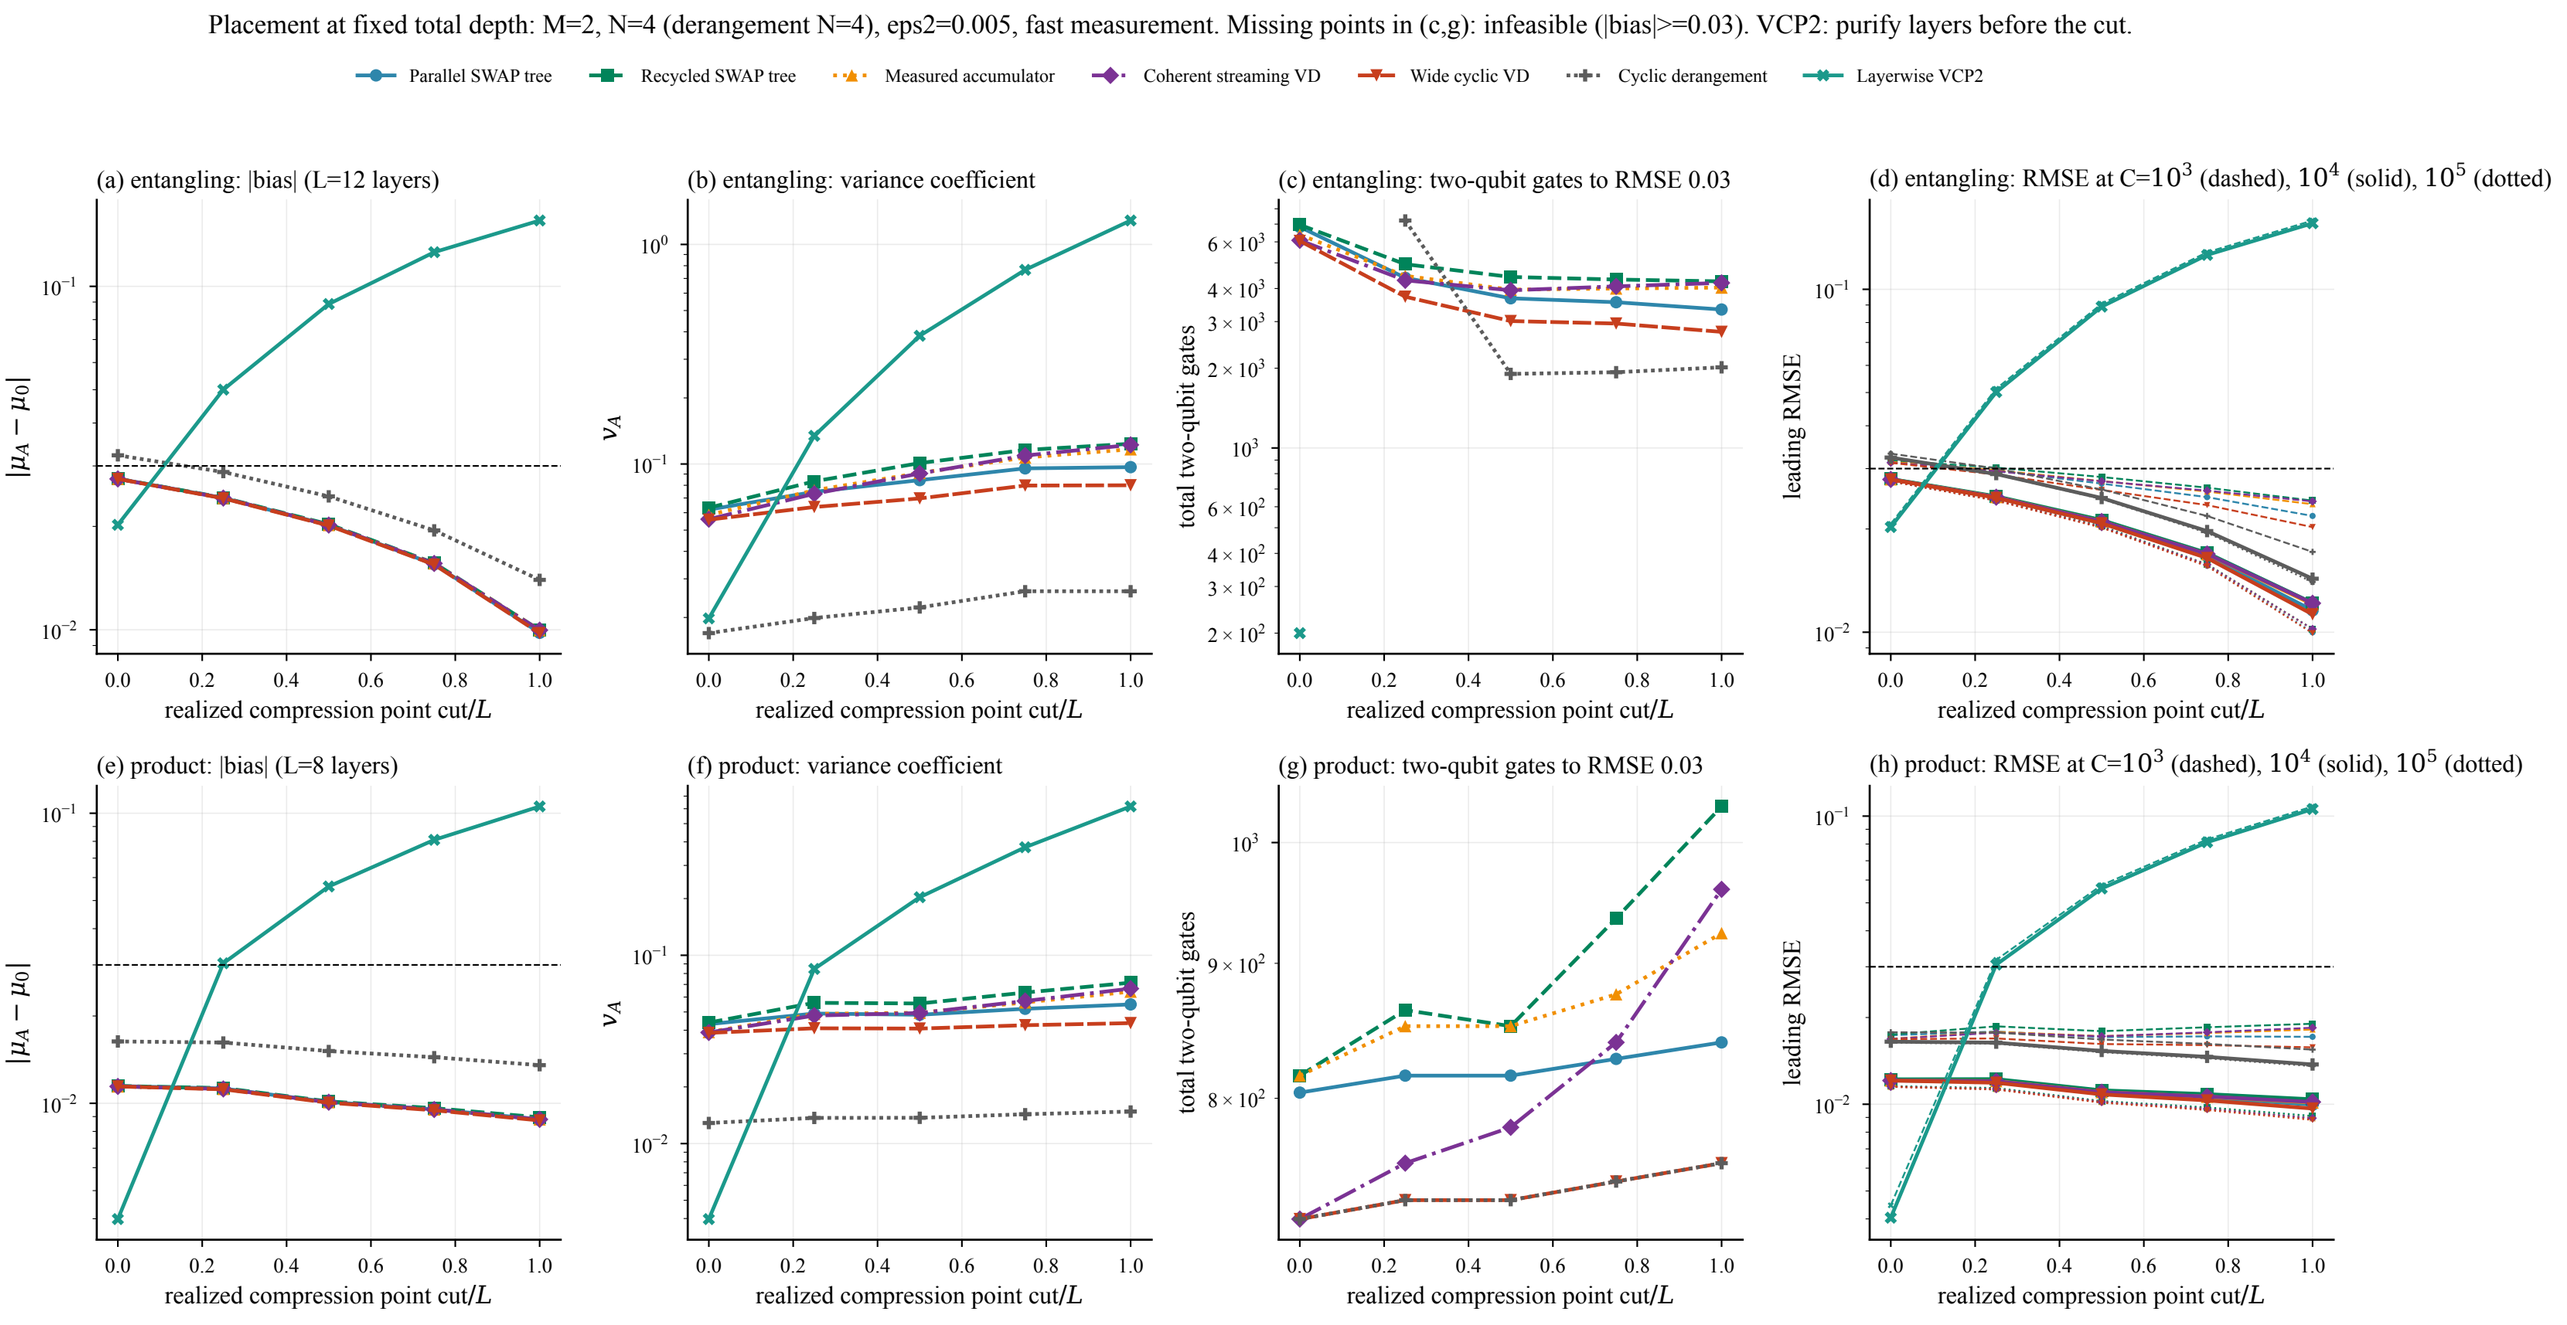

Placement at fixed total depth: M=2, N=4 (derangement N=4), eps2=0.005, fast measurement. Missing points in (c,g): infeasible (|bias|>=0.03). VCP2: purify layers before the cut.
Parallel SWAP tree
Recycled SWAP tree
Measured accumulator
Coherent streaming VD
Wide cyclic VD
Cyclic derangement
Layerwise VCP2
(a) entangling: |bias| (L=12 layers)
(b) entangling: variance coefficient
(c) entangling: two-qubit gates to RMSE 0.03
(d) entangling: RMSE at C=10^3 (dashed), 10^4 (solid), 10^5 (dotted)
(e) product: |bias| (L=8 layers)
(f) product: variance coefficient
(g) product: two-qubit gates to RMSE 0.03
(h) product: RMSE at C=10^3 (dashed), 10^4 (solid), 10^5 (dotted)
$|\mu_A - \mu_0|$
v_A
total two-qubit gates
leading RMSE
realized compression point cut/L