A: Datasheet

Algorithm: tevian_007

Developer: Tevian

Submission Date: 2021_10_12

Template size: 1032 bytes

Template time (2.5 percentile): 775 msec

Template time (median): 778 msec

Template time (97.5 percentile): 805 msec

Investigation:


Mugshot webcam ranking 17 (out of 269) -- FNIR(1600000, 0, 1) = 0.0093 vs. lowest 0.0057 from sensetime_006


Mugshot profile ranking 16 (out of 237) -- FNIR(1600000, 0, 1) = 0.0926 vs. lowest 0.0550 from sensetime_006

Identification:

Mugshot webcam ranking 14 (out of 267) -- FNIR(1600000, T, L+1) = 0.0217, FPIR=0.001000 vs. lowest 0.0122 from sensetime_003

Mugshot profile ranking 8 (out of 236) -- FNIR(1600000, T, L+1) = 0.3011, FPIR=0.001000 vs. lowest 0.1331 from cloudwalk_hr_000

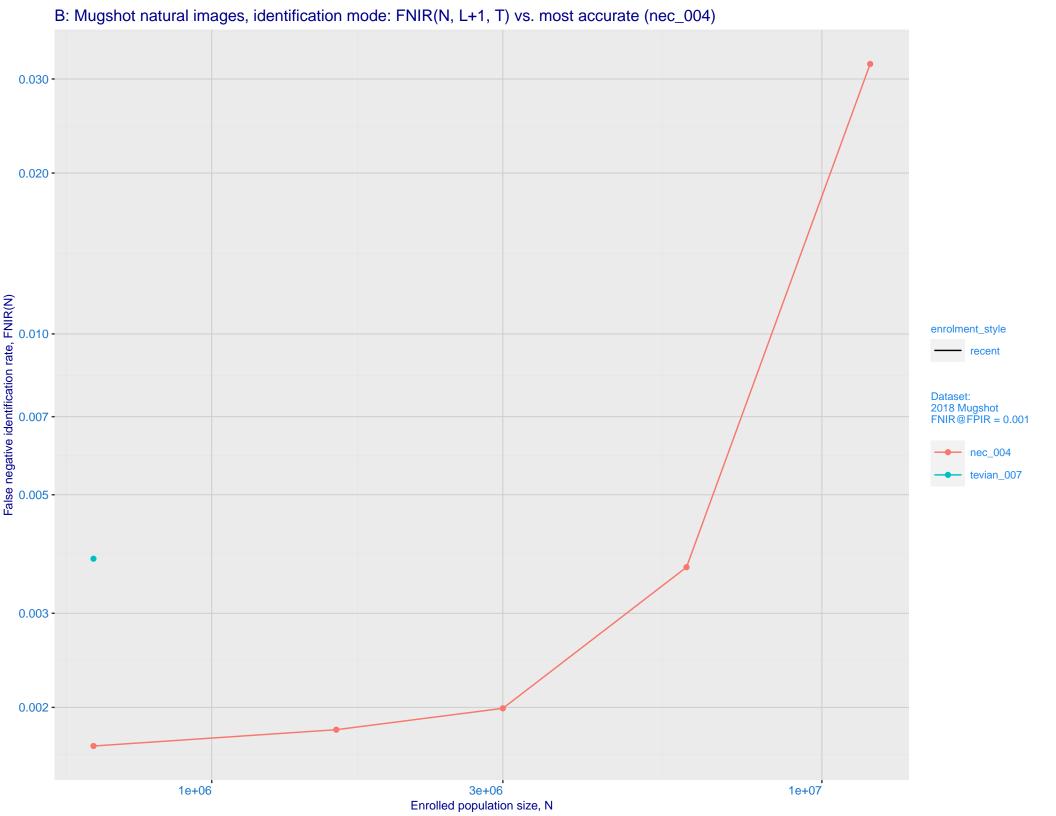

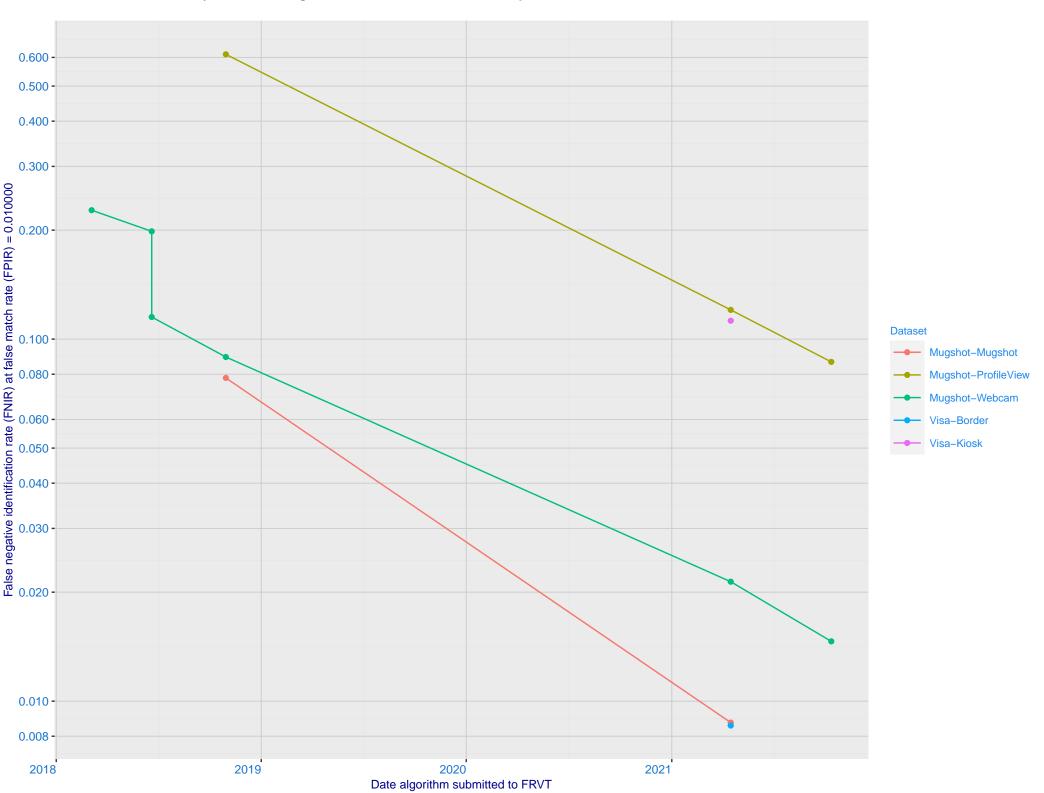


D: 1:N error tradeoff by dataset and enrollment type. N = 1600000 individuals Immigration Immigration Mugshot visa-border visa-kiosk natural 0.700 -0.500 -0.300 -0.200 -0.100 -False negative identification rate, FNIR(T) enrolment_style random-ONE-MATE recent-ONE-MATE 0.010 -0.007 -0.005 -0.003 -0.002 - $0.001 - \frac{1}{10^{2}} - \frac{1}{10^{2}$


False positive identification rate, FPIR(T)


E: Dependence of error rates on T by number enrolled identities, N, for Mugshot natural images

N — 00640000

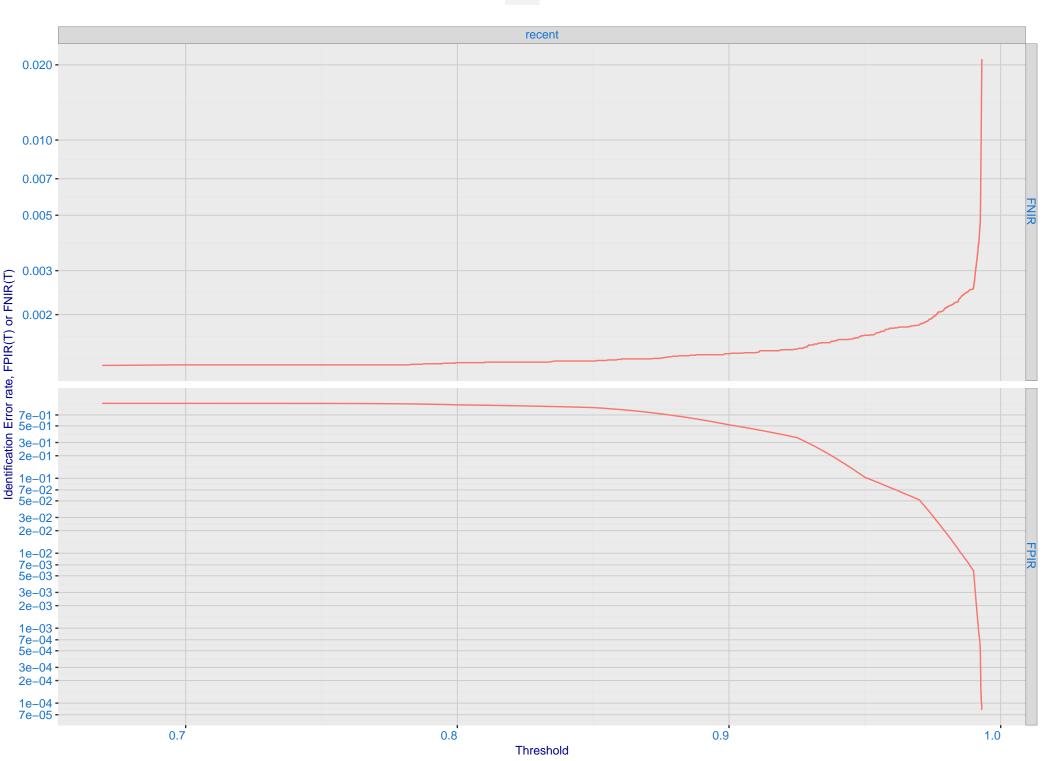


F: FPIR vs. Selectivity for mugshot images, N = 1600000 subjects enrolled with one recent mate 7e+01 -5e+01 -3e+01 -2e+01 -1e+01 -7e+00 -5e+00 -3e+00 -2e+00 -1e+00 -7e-01 -5e-01 -3e-01 -2e-01 -1e-01 -7e-02 -5e-02 -3e-02 -3e-02 -1e-02 -Enrolled images: recent N = 1600000 Mugshot webcam 7e-03 -5e-03 -3e-03 -2e-03 -1e-03 -7e-04 -5e-04 -3e-04 -2e-04 -1e-04 -7e-05 -5e-05 -3e-05 -2e-05 -1e-05 -1e-05 3e-05 1e-04 3e-04 1e-03 3e-03 1e-02 3e-02 1e-01 3e-01 False Positive Idenification Rate, FPIR(T)

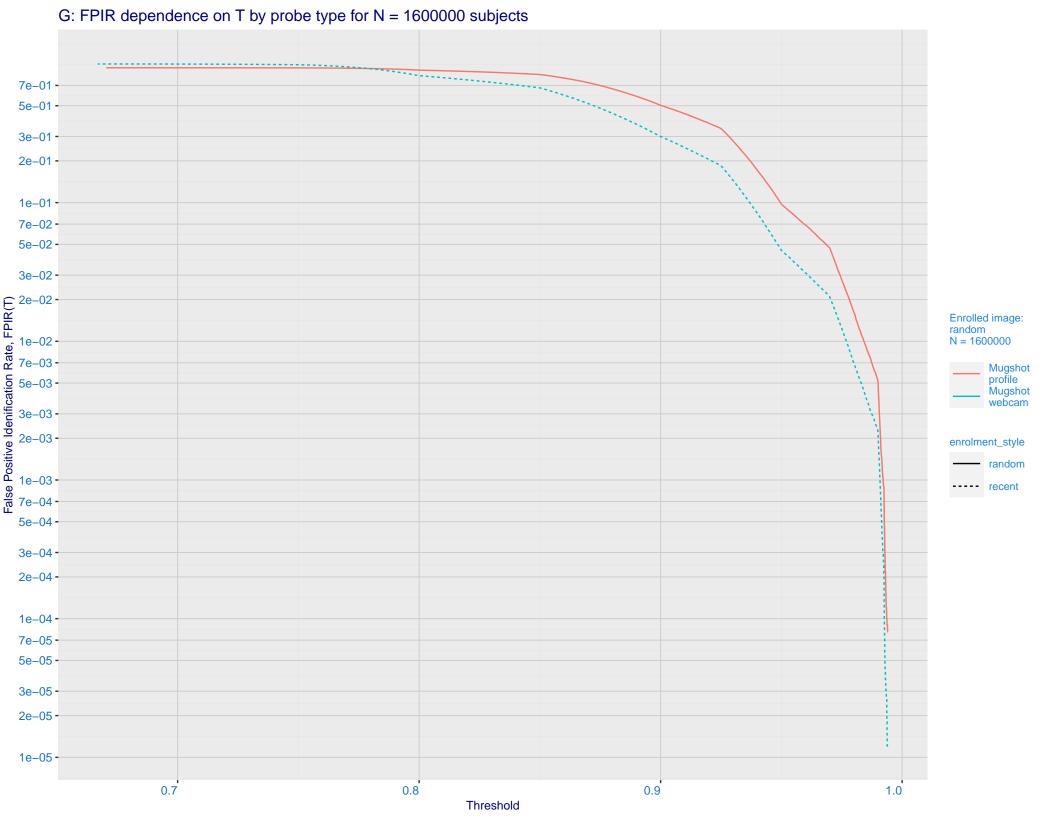


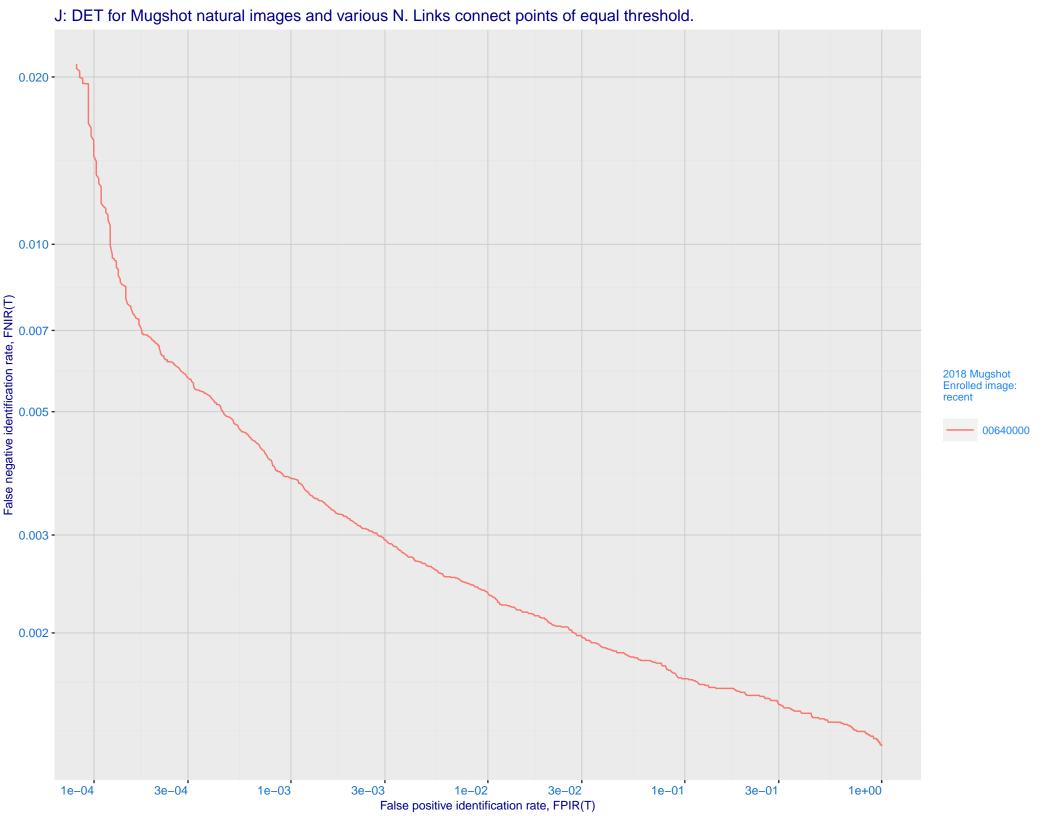

K: Investigational mode: FNIR(N, 1, 0) vs. most accurate (sensetime_006) Immigration **Immigration** visa-border visa-kiosk 0.070 -• 0.050 -0.030 -0.020 -0.010 -0.007 -0.005 -0.003 -Ealse negative identification rate, FNIR(N) - 0.000 enrolment_style random ---- recent Mugshot natural Mugshot webcam FNIR@Rank = 1 sensetime_006 tevian_007 0.020 -0.010 -0.007 -• 0.005 -0.003 -0.002 -0.001 -1e+06 3e+06 1e+07 1e+06 3e+06 1e+07 Enrolled population size, N

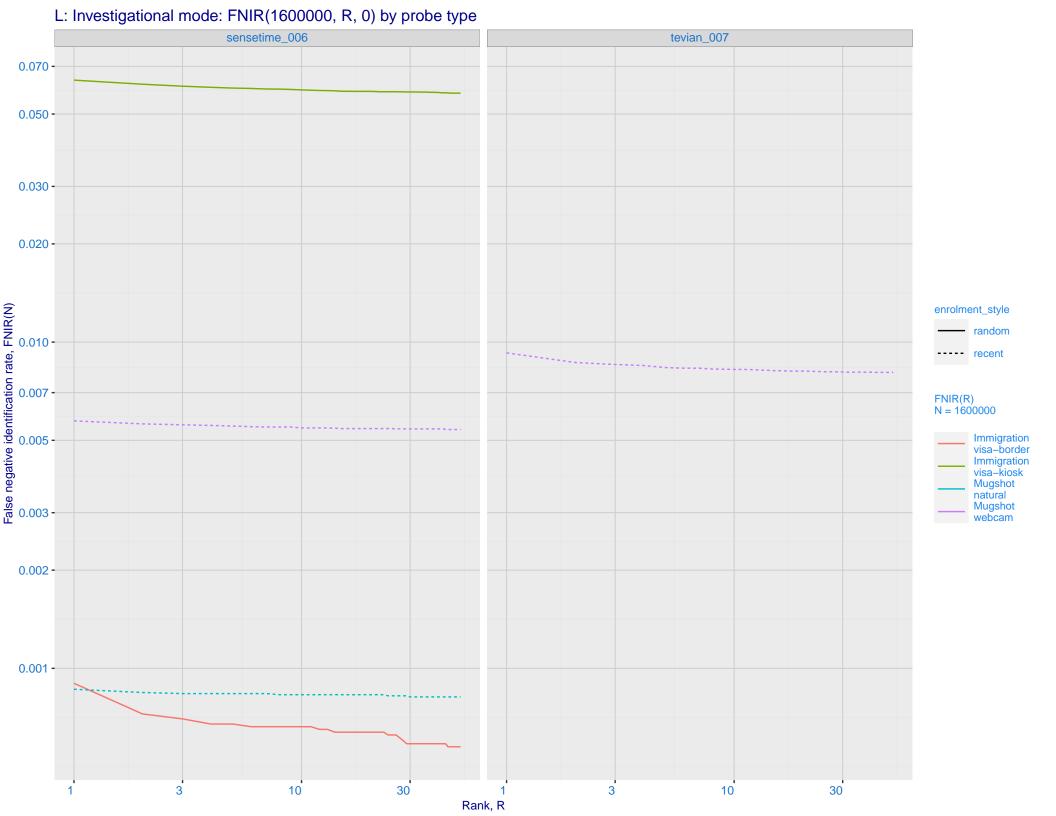

M: Template duration; search duration vs. N. The blue and pink ribbon covers 95 percent of observed measurements. The template generation time is independent of N. The log and power–law models are fit to the first two (N,T) observations

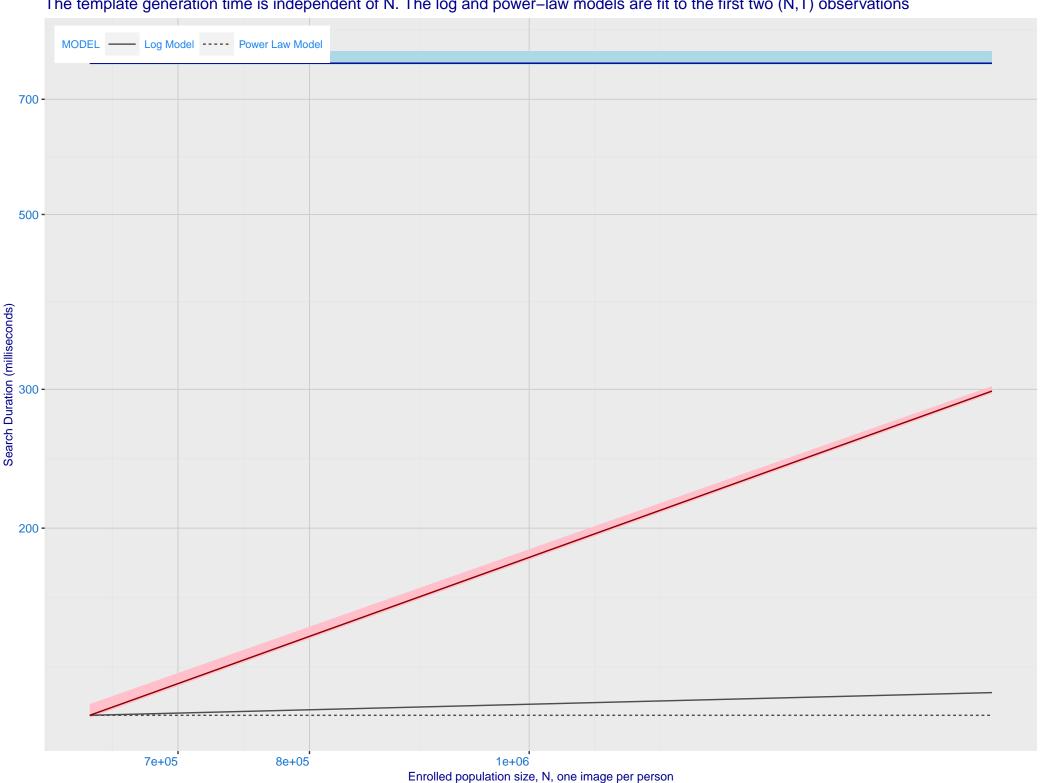

Q: Identification FNIR(N, T, L+1) and Investigational FNIR(N, 0, R) under ageing



