

A: Datasheet

Algorithm: realnetworks_005

Developer: Realnetworks Inc

Submission Date: 2021_06_23

Template size: 2056 bytes

Template time (2.5 percentile): 324 msec

Template time (median): 332 msec

Template time (97.5 percentile): 342 msec

Investigation:

Frontal mugshot ranking 50 (out of 288) -- FNIR(1600000, 0, 1) = 0.0023 vs. lowest 0.0009 from sensetime_006

Mugshot webcam ranking 45 (out of 250) -- FNIR(1600000, 0, 1) = 0.0132 vs. lowest 0.0057 from sensetime_006

Mugshot profile ranking 55 (out of 219) -- FNIR(1600000, 0, 1) = 0.4331 vs. lowest 0.0550 from sensetime_006

Immigration visa-border ranking 40 (out of 177) -- FNIR(1600000, 0, 1) = 0.0043 vs. lowest 0.0009 from sensetime_006

Immigration visa-kiosk ranking 40 (out of 174) -- FNIR(1600000, 0, 1) = 0.1019 vs. lowest 0.0568 from cloudwalk_hr_000

Identification:

Frontal mugshot ranking 63 (out of 288) -- FNIR(1600000, T, L+1) = 0.0275, FPIR=0.001000 vs. lowest 0.0018 from sensetime_004


Mugshot webcam ranking 56 (out of 248) -- FNIR(1600000, T, L+1) = 0.0744, FPIR=0.001000 vs. lowest 0.0122 from sensetime_003

Mugshot profile ranking 55 (out of 218) -- FNIR(1600000, T, L+1) = 0.9707, FPIR=0.001000 vs. lowest 0.1331 from cloudwalk_hr_000


Immigration visa-border ranking 49 (out of 176) -- FNIR(1600000, T, L+1) = 0.0366, FPIR=0.001000 vs. lowest 0.0039 from sensetime_006

Immigration visa-kiosk ranking 30 (out of 171) -- FNIR(1600000, T, L+1) = 0.2149, FPIR=0.001000 vs. lowest 0.0925 from sensetime_006


B: Mugshot natural images, identification mode: FNIR(N, L+1, T) vs. most accurate (nec_004)

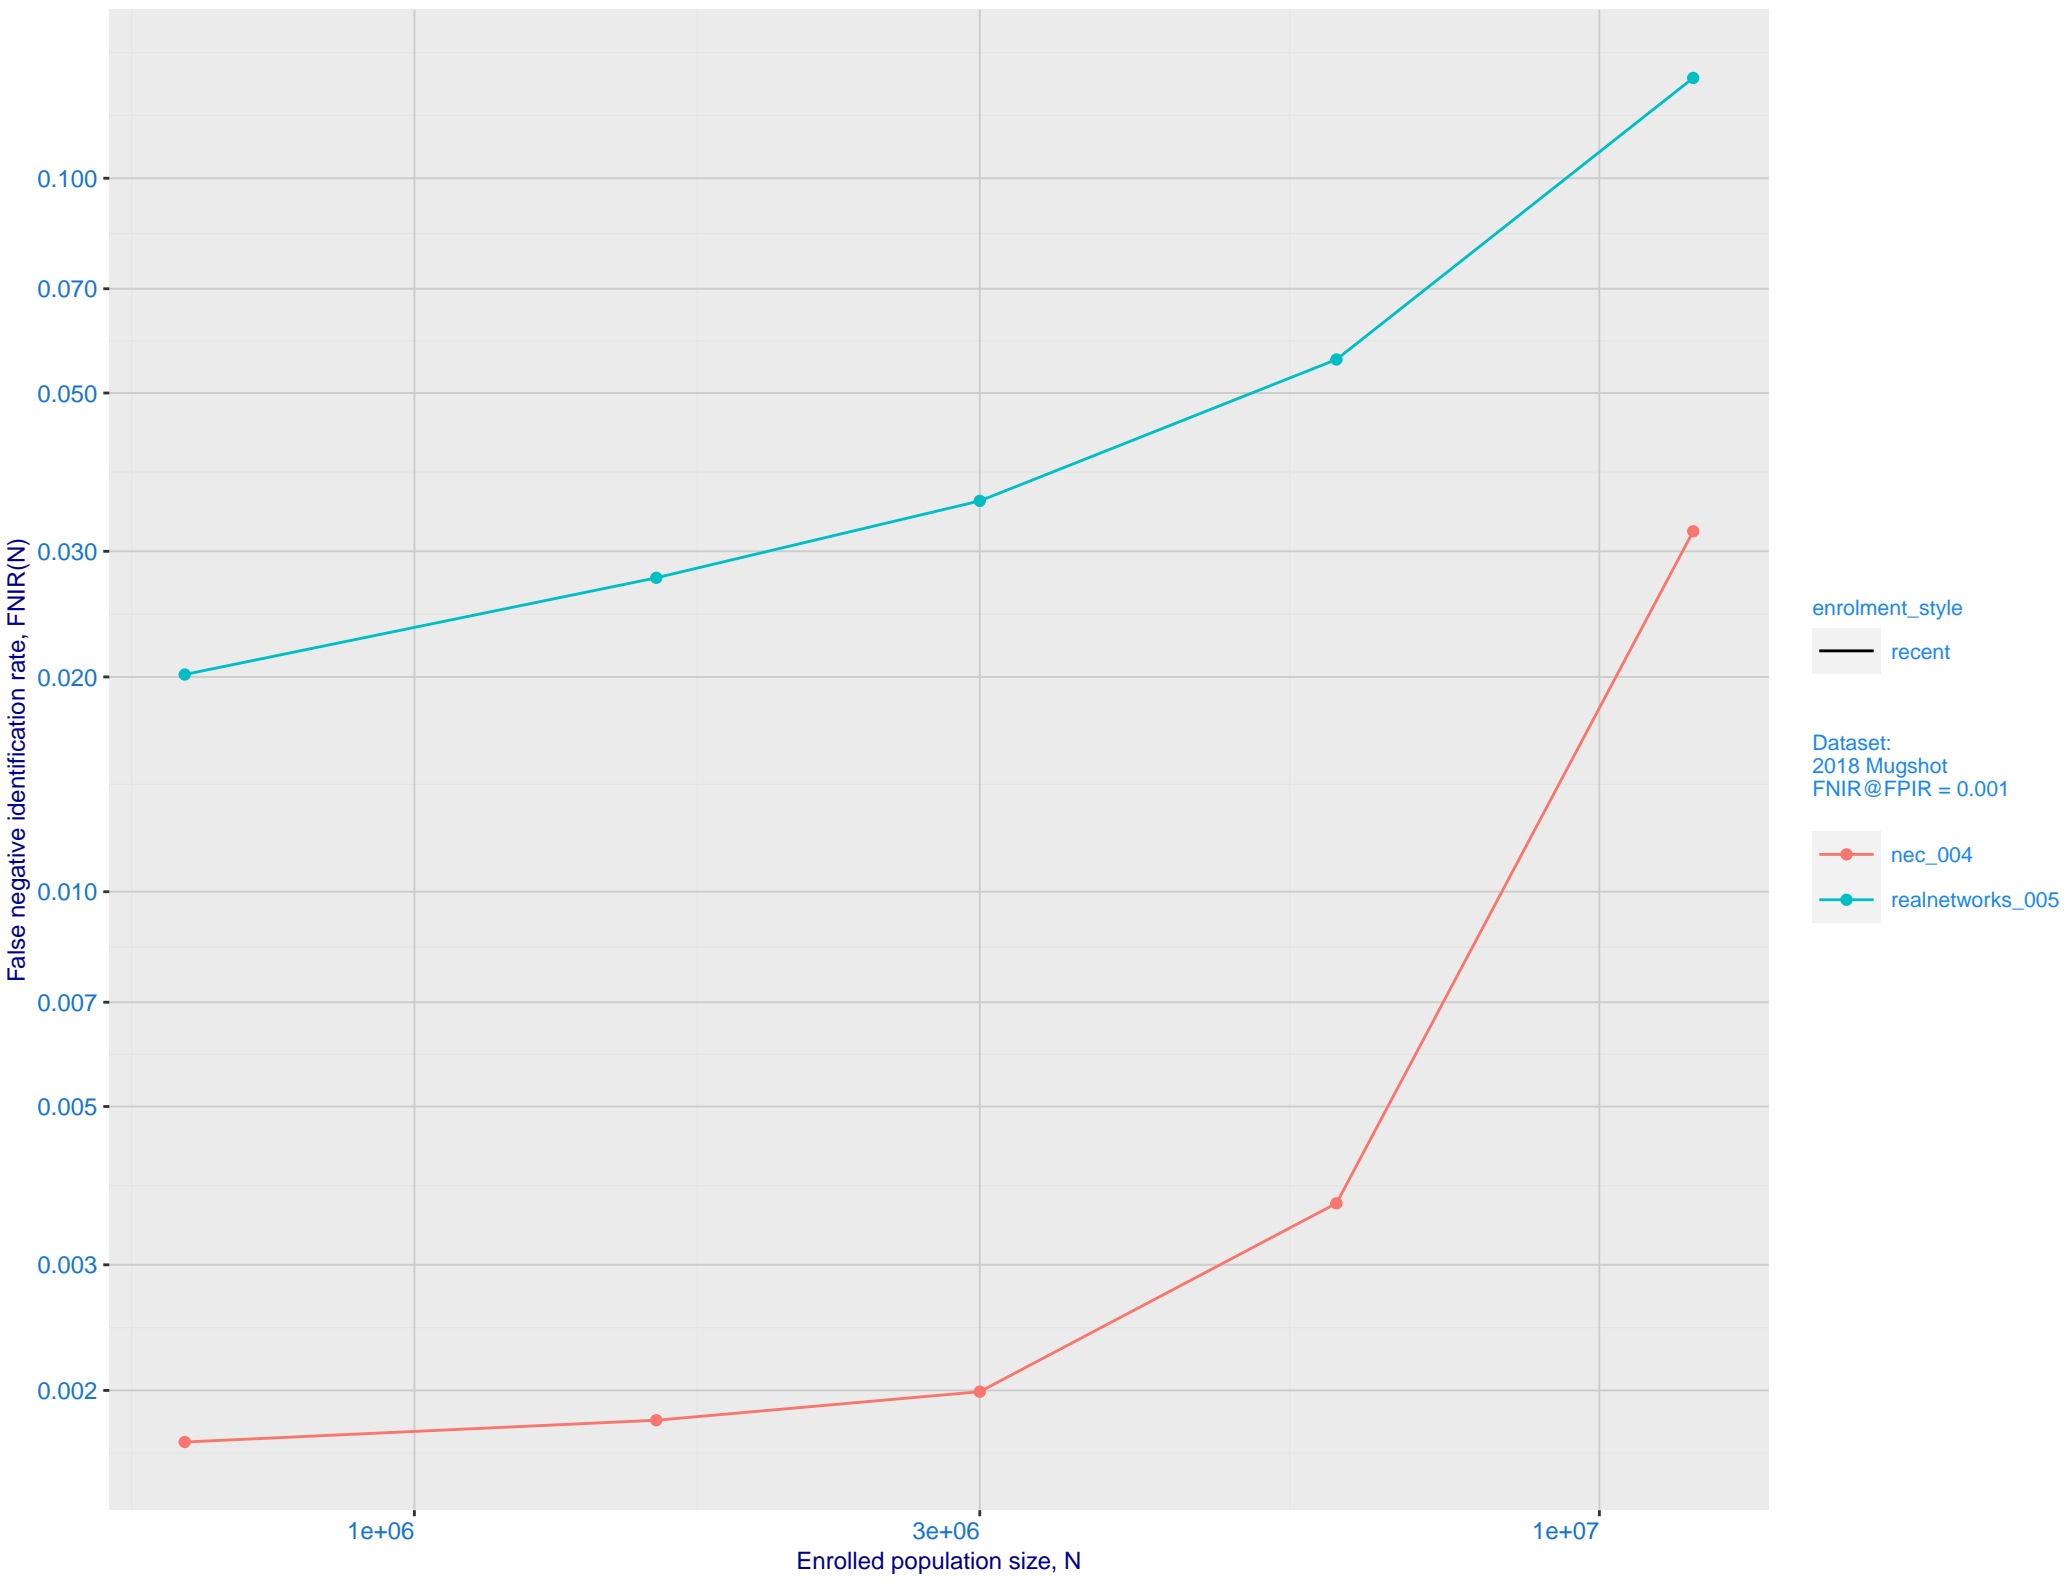


C: Evolution of accuracy for REALNETWORKS algorithms on three datasets 2018 – present

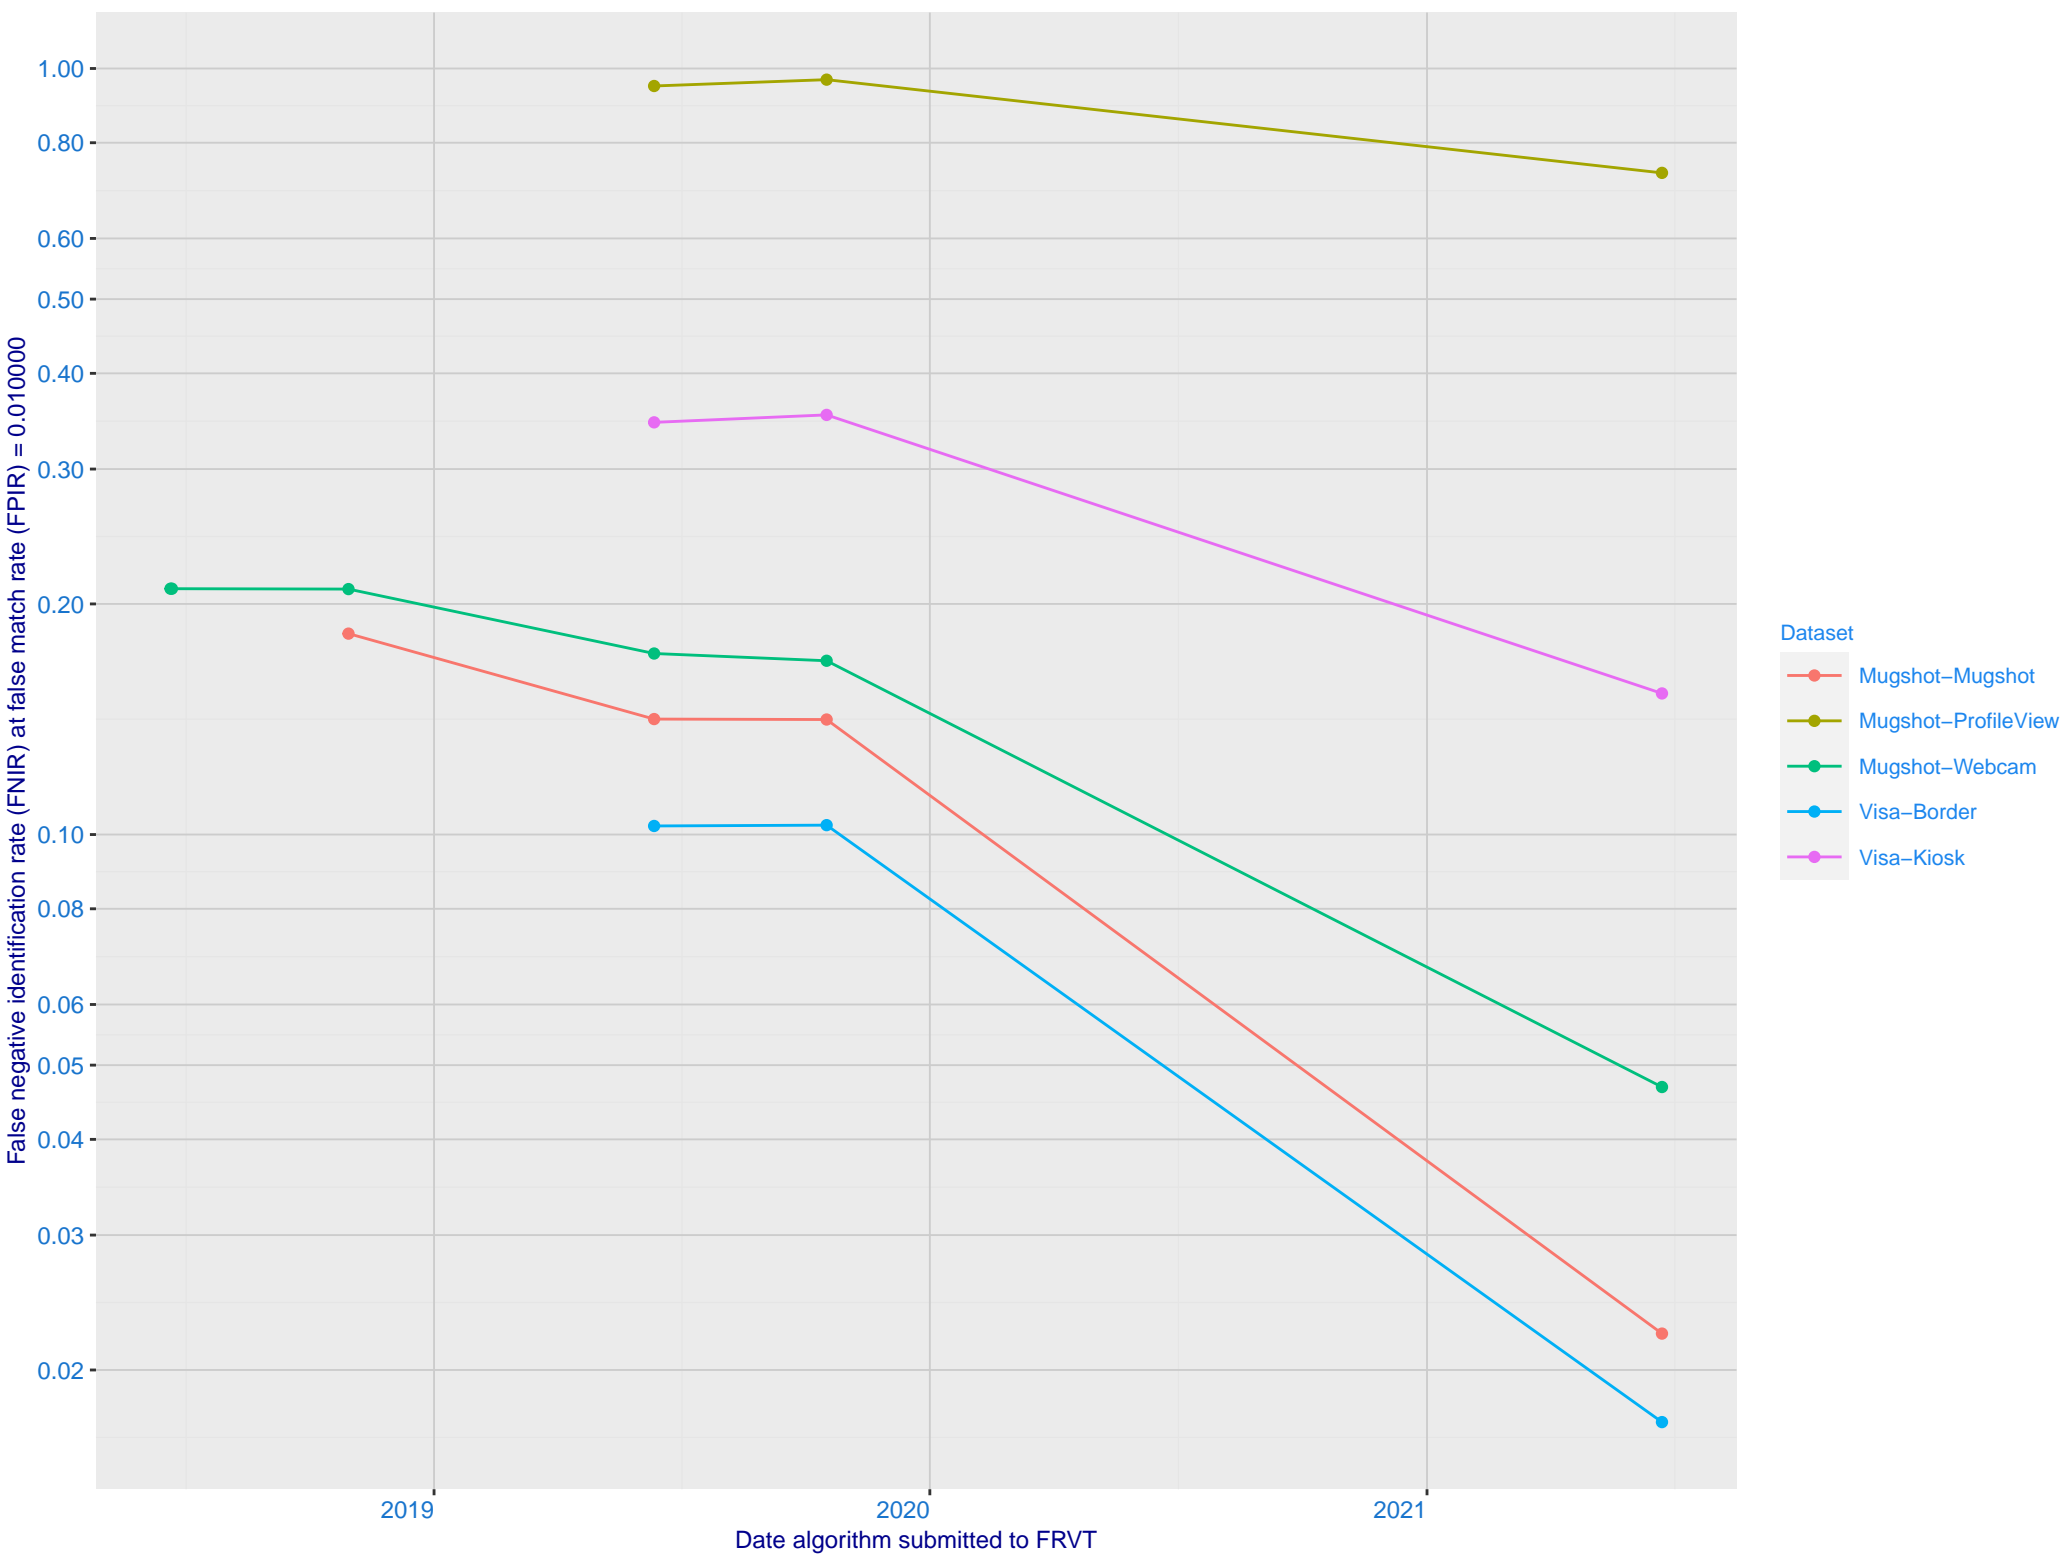


D: 1:N error tradeoff by dataset and enrollment type. N = 1600000 individuals

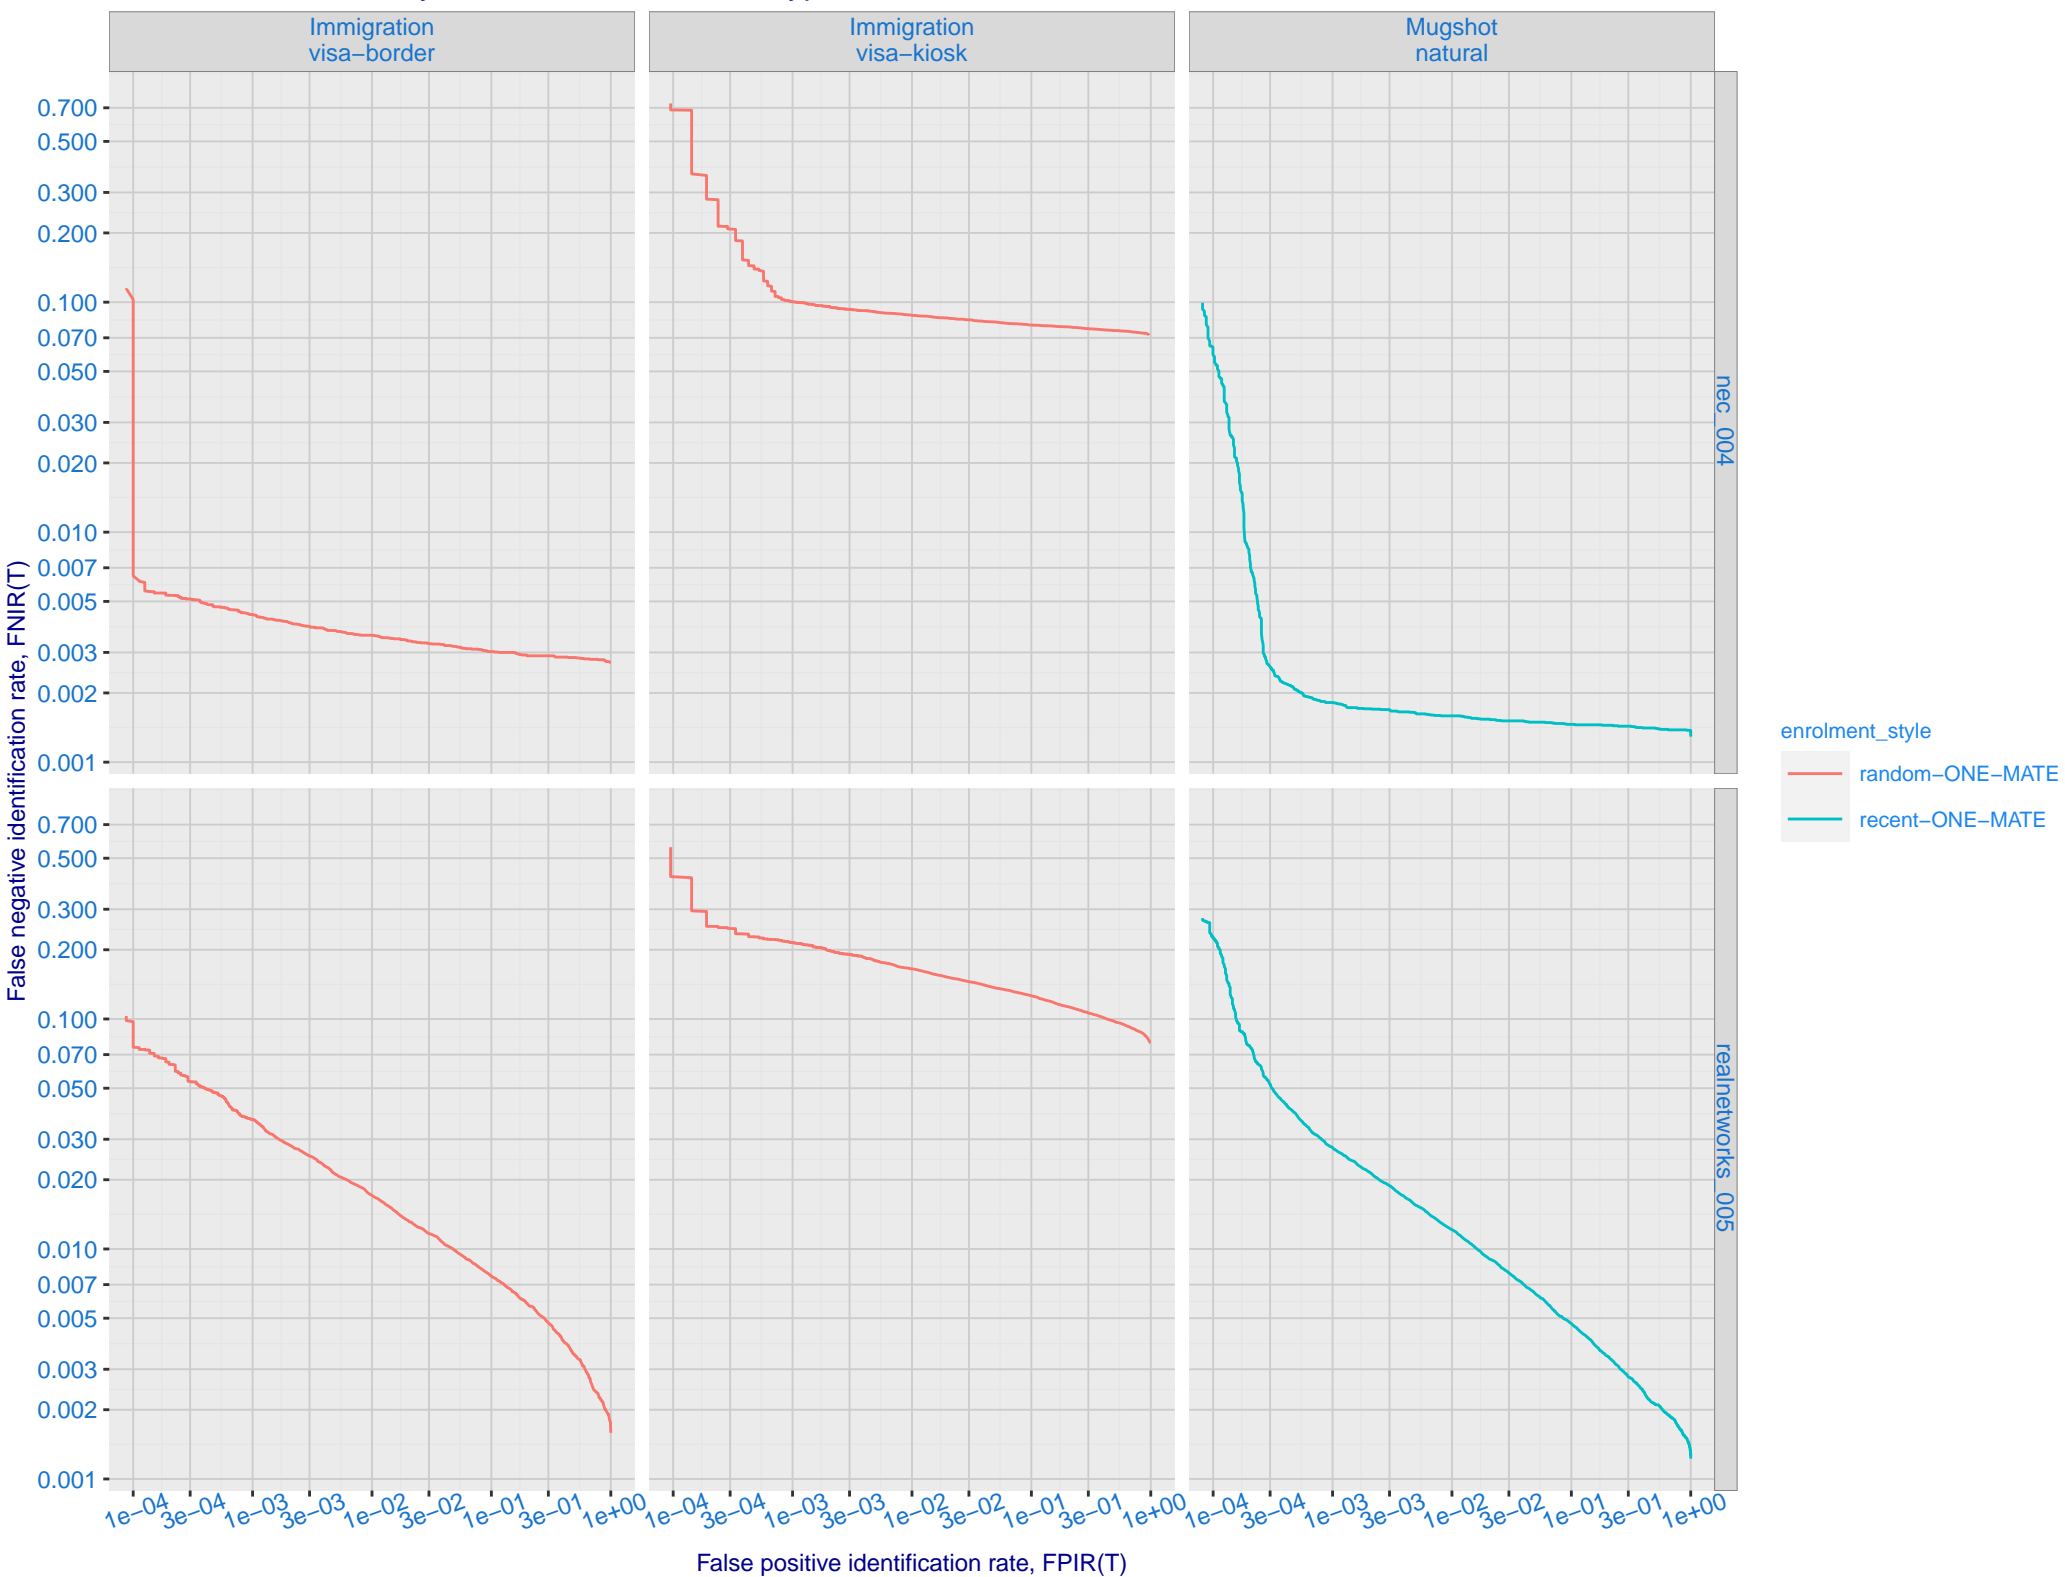

E: Dependence of error rates on T by number enrolled identities, N, for Mugshot natural images

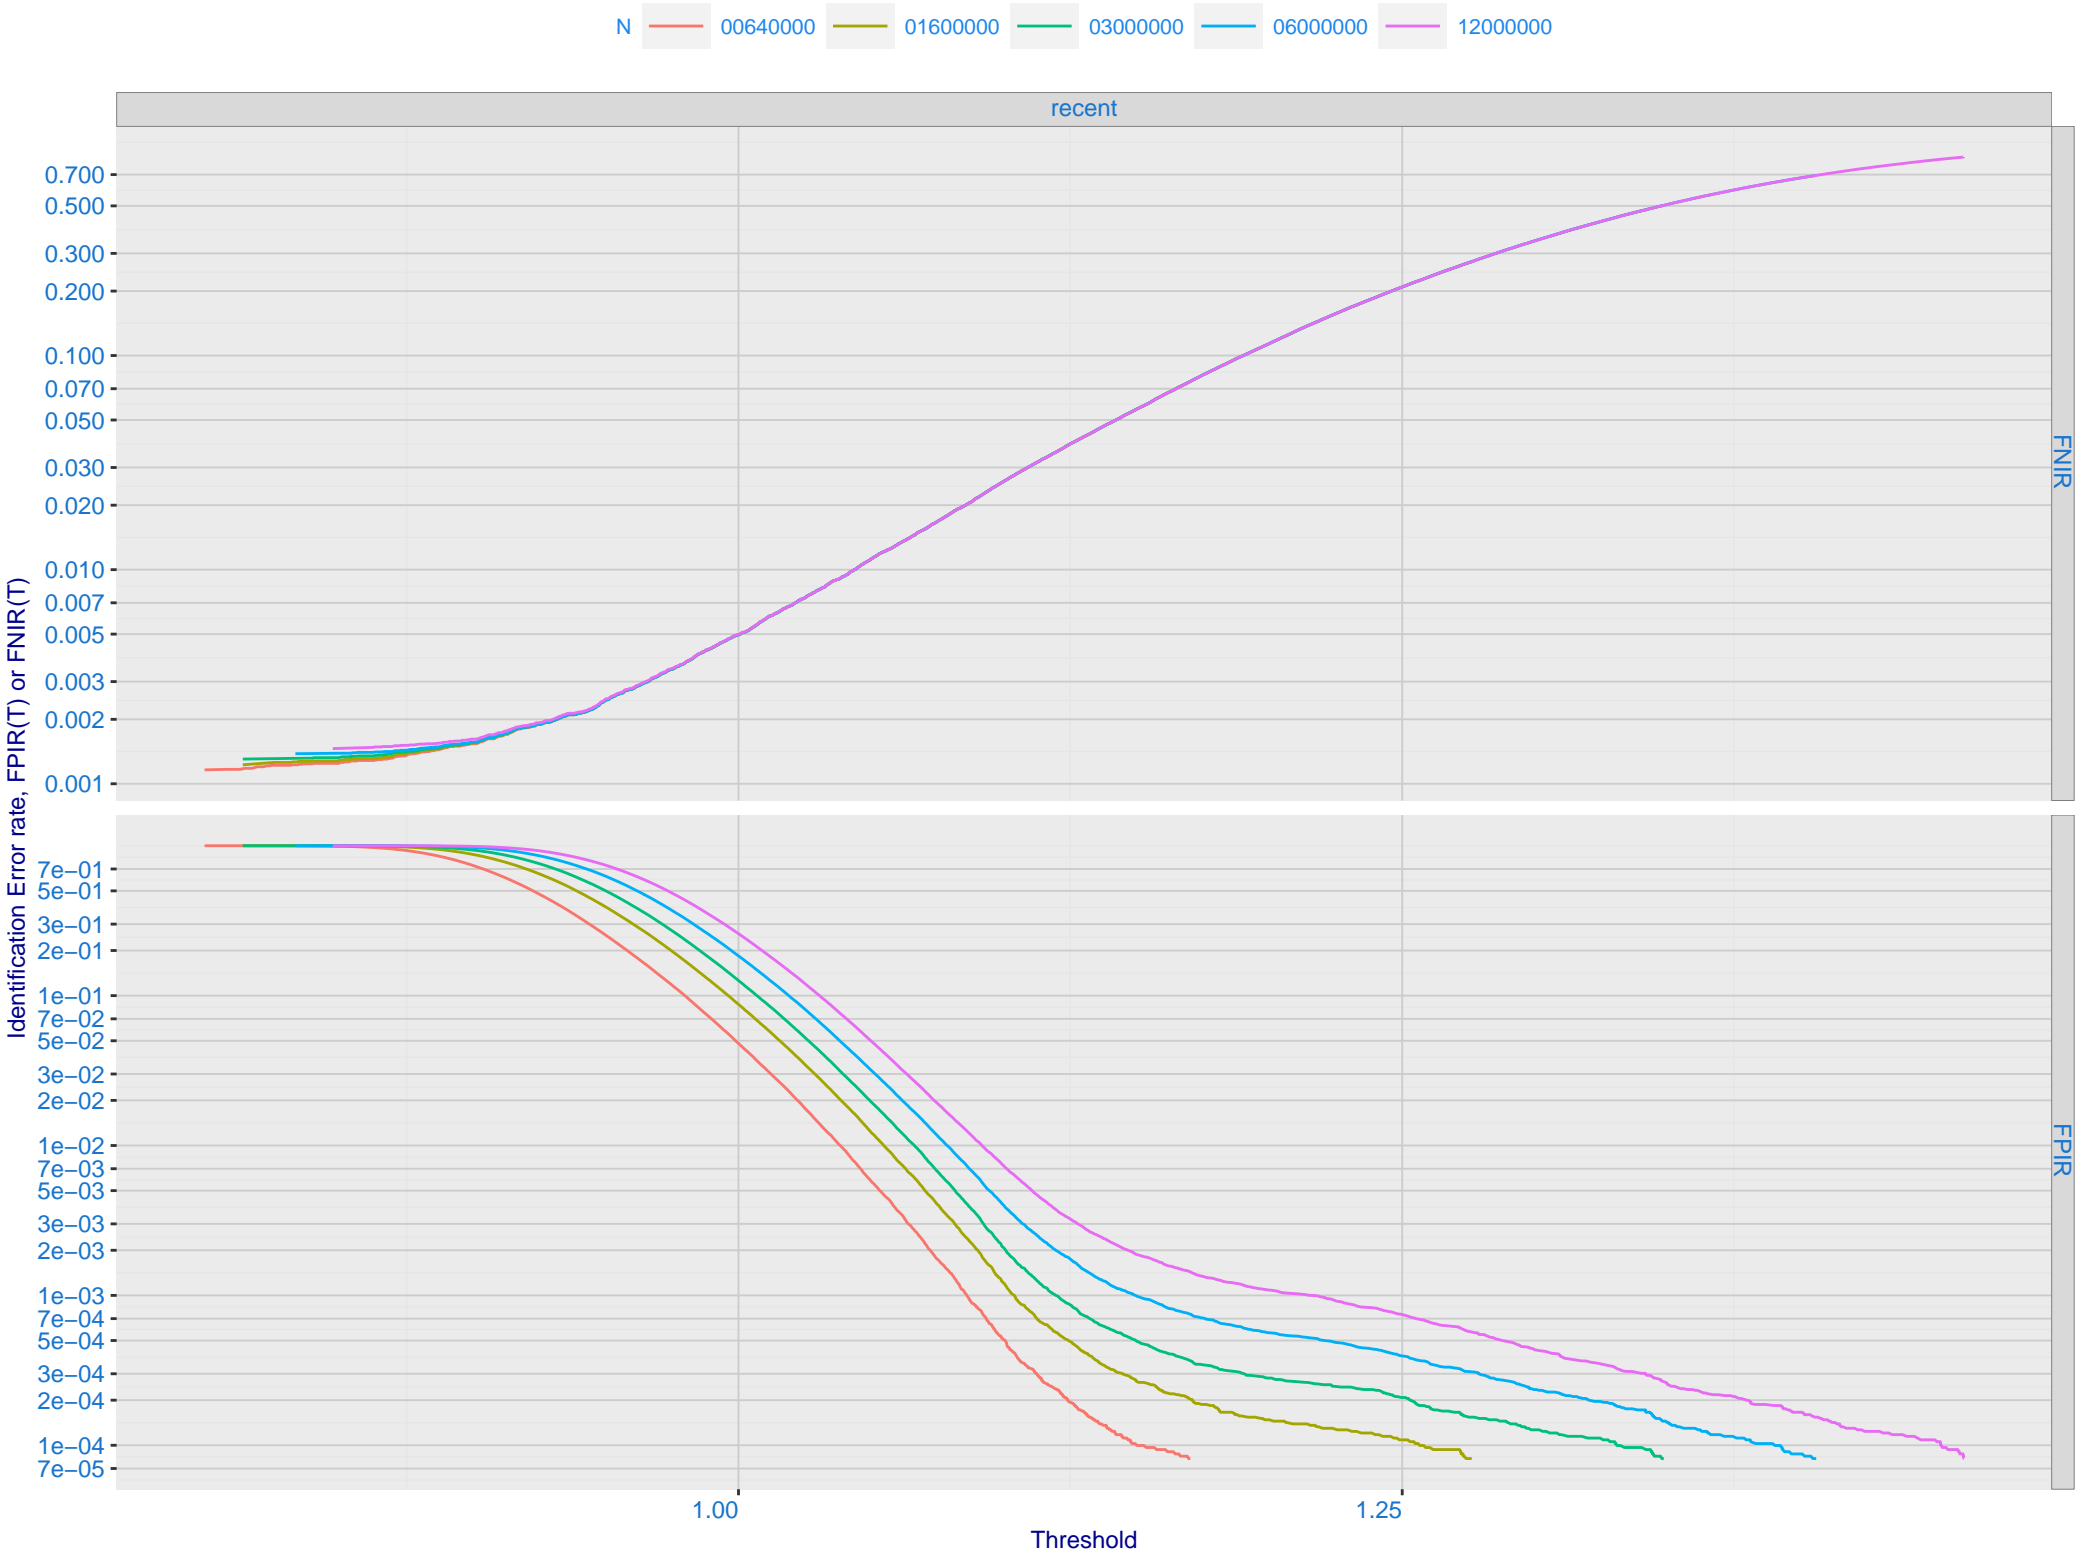

F: FPIR vs. Selectivity for mugshot images, N = 1600000 subjects enrolled with one recent mate

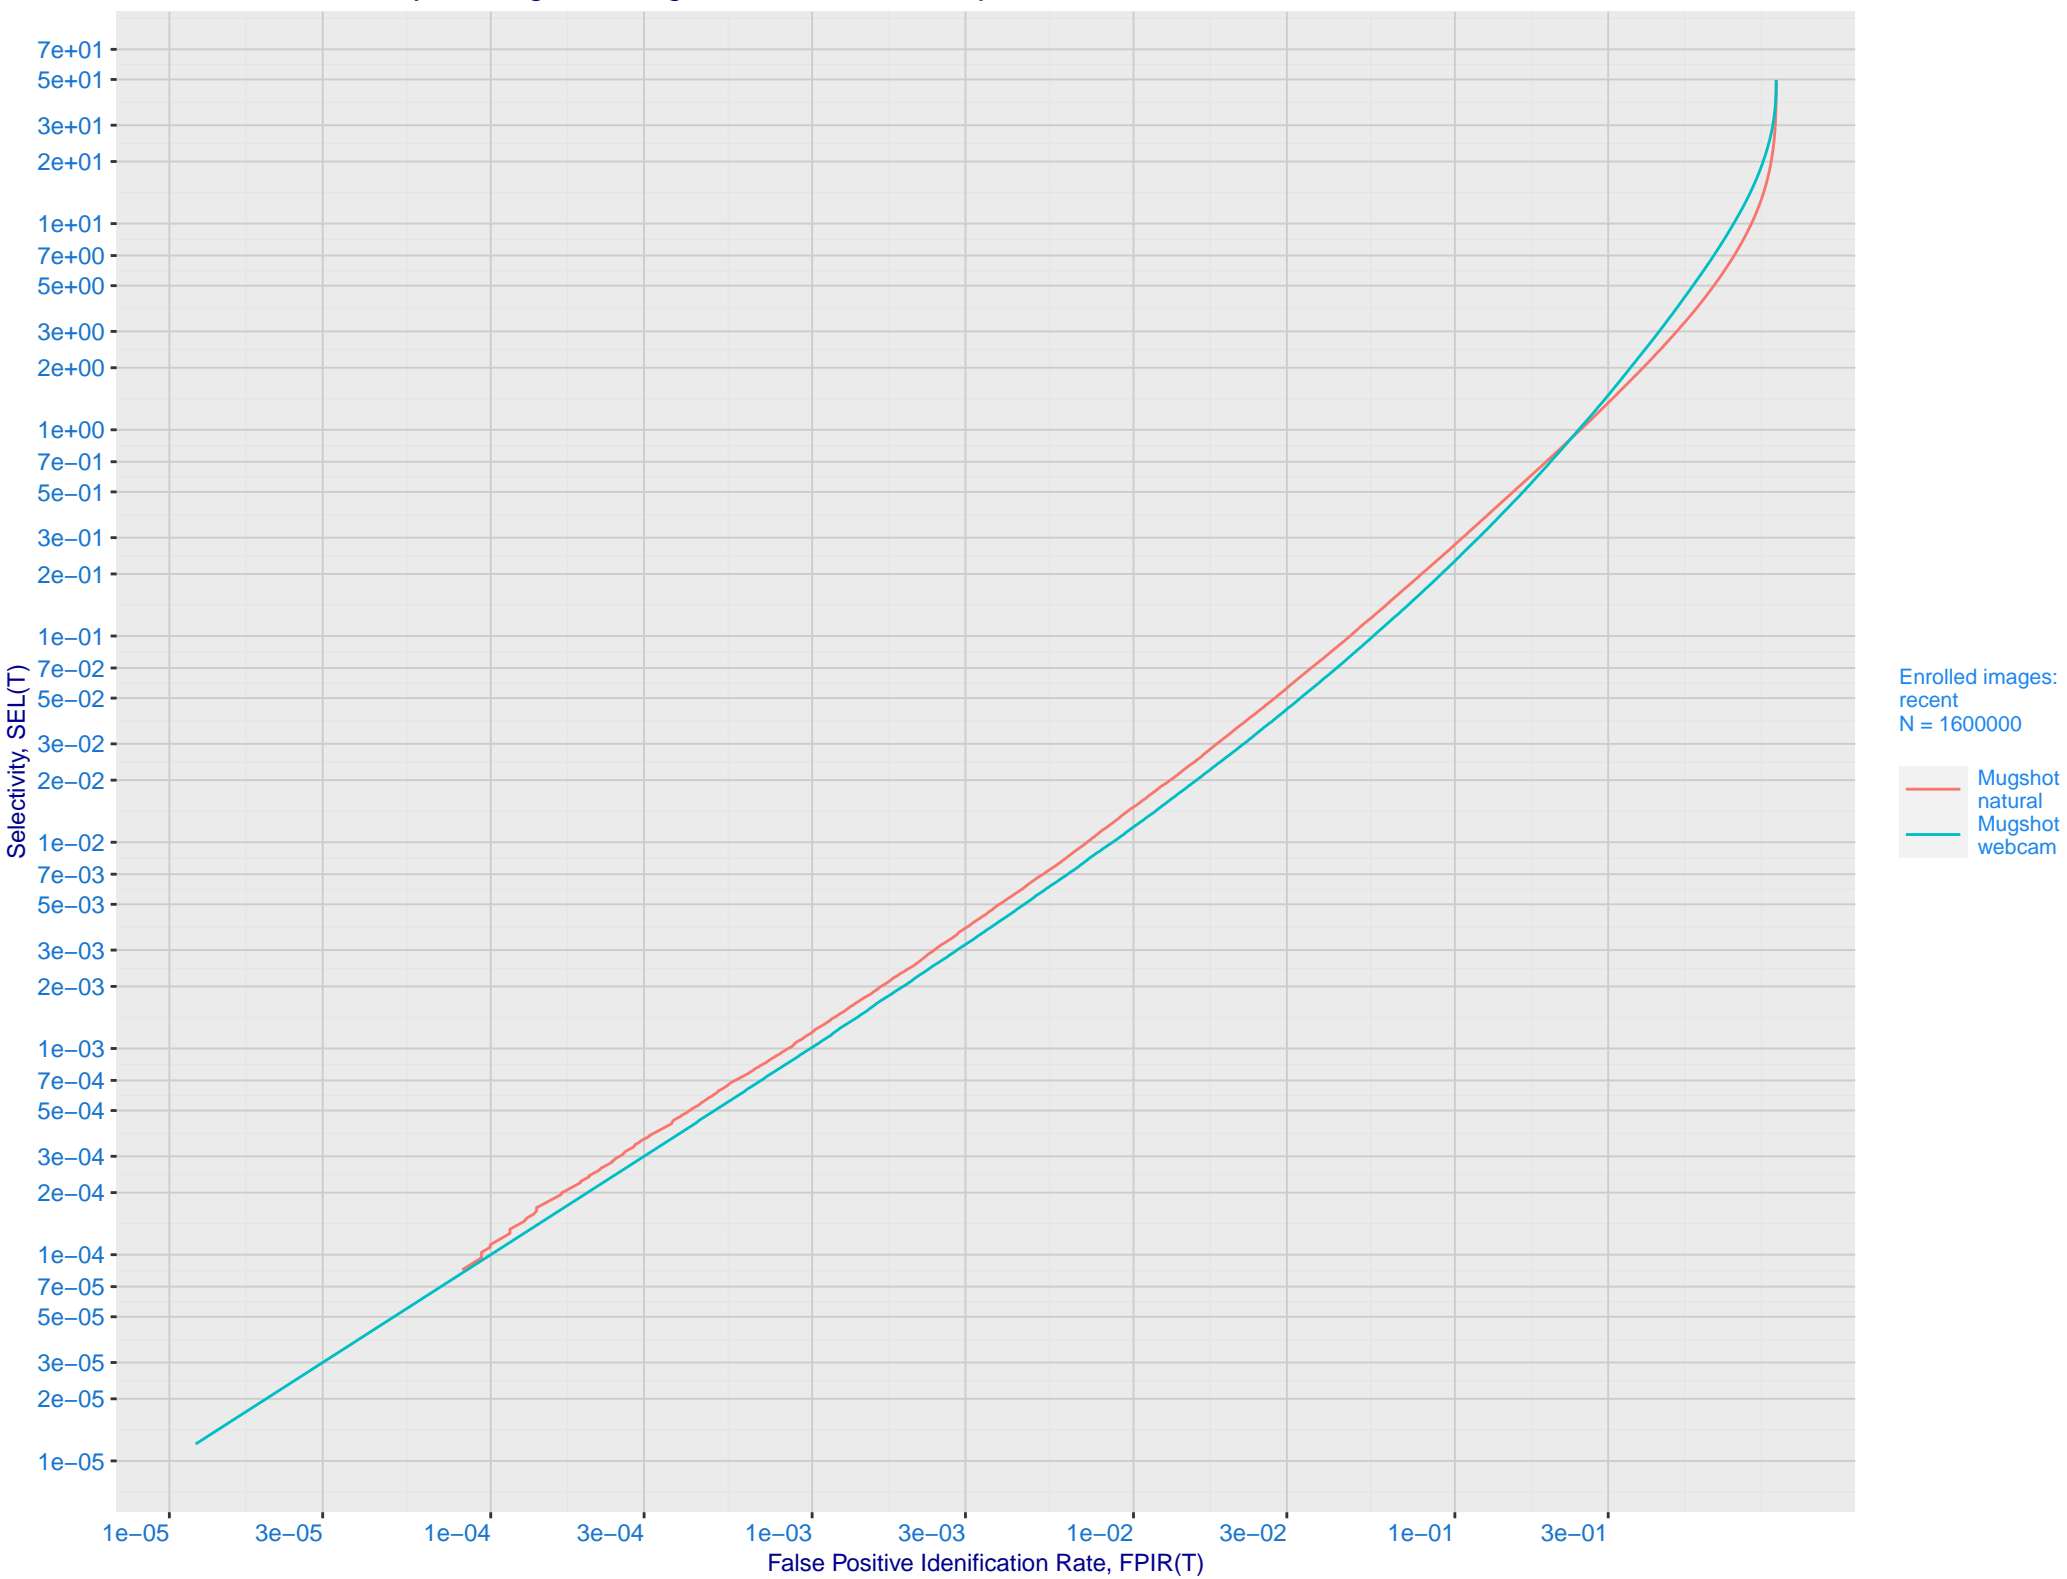


- Immigration visa-border
- Immigration visa-kiosk
- Mugshot natural
- Mugshot profile
- Mugshot webcam

enrolment_style

—	random
- - -	recent


H: Reduced length candidate lists for human review

Dataset is border–border with time–lapse [10,15] YRS with N = 1600000. Probes are 10–15 years later than enrollment image

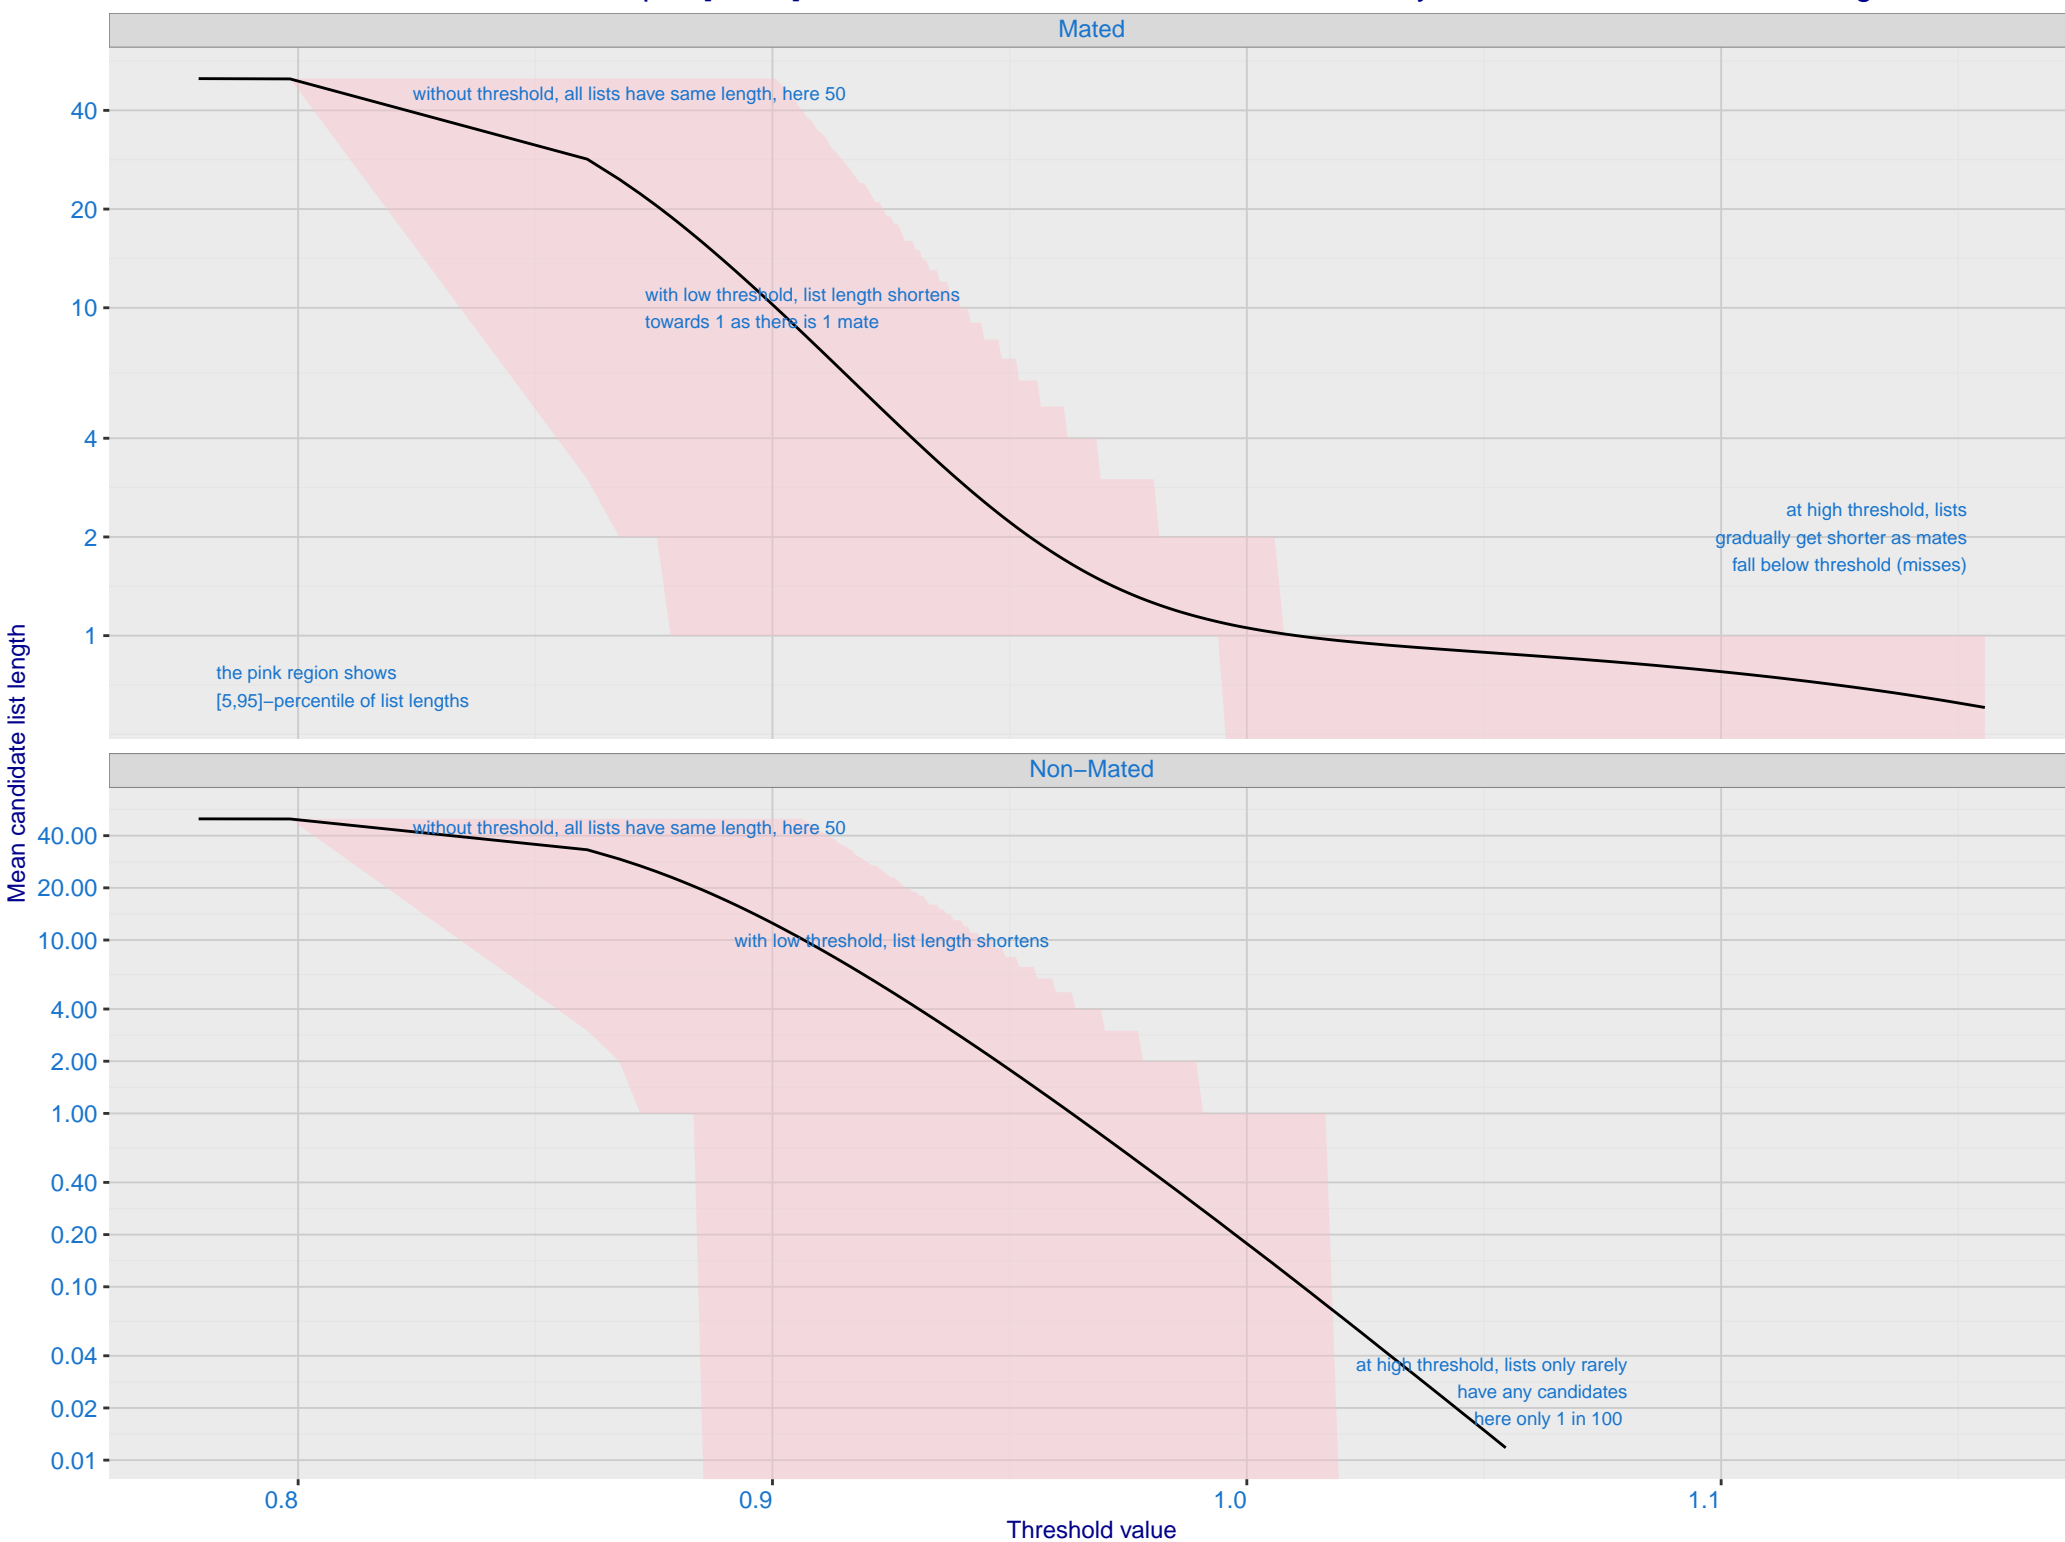


I: FNIR and FPIR dependence on threshold


Dataset is border-border with time-lapse [10,15] YRS with N = 1600000. Probes are 10-15 years later than enrollment image

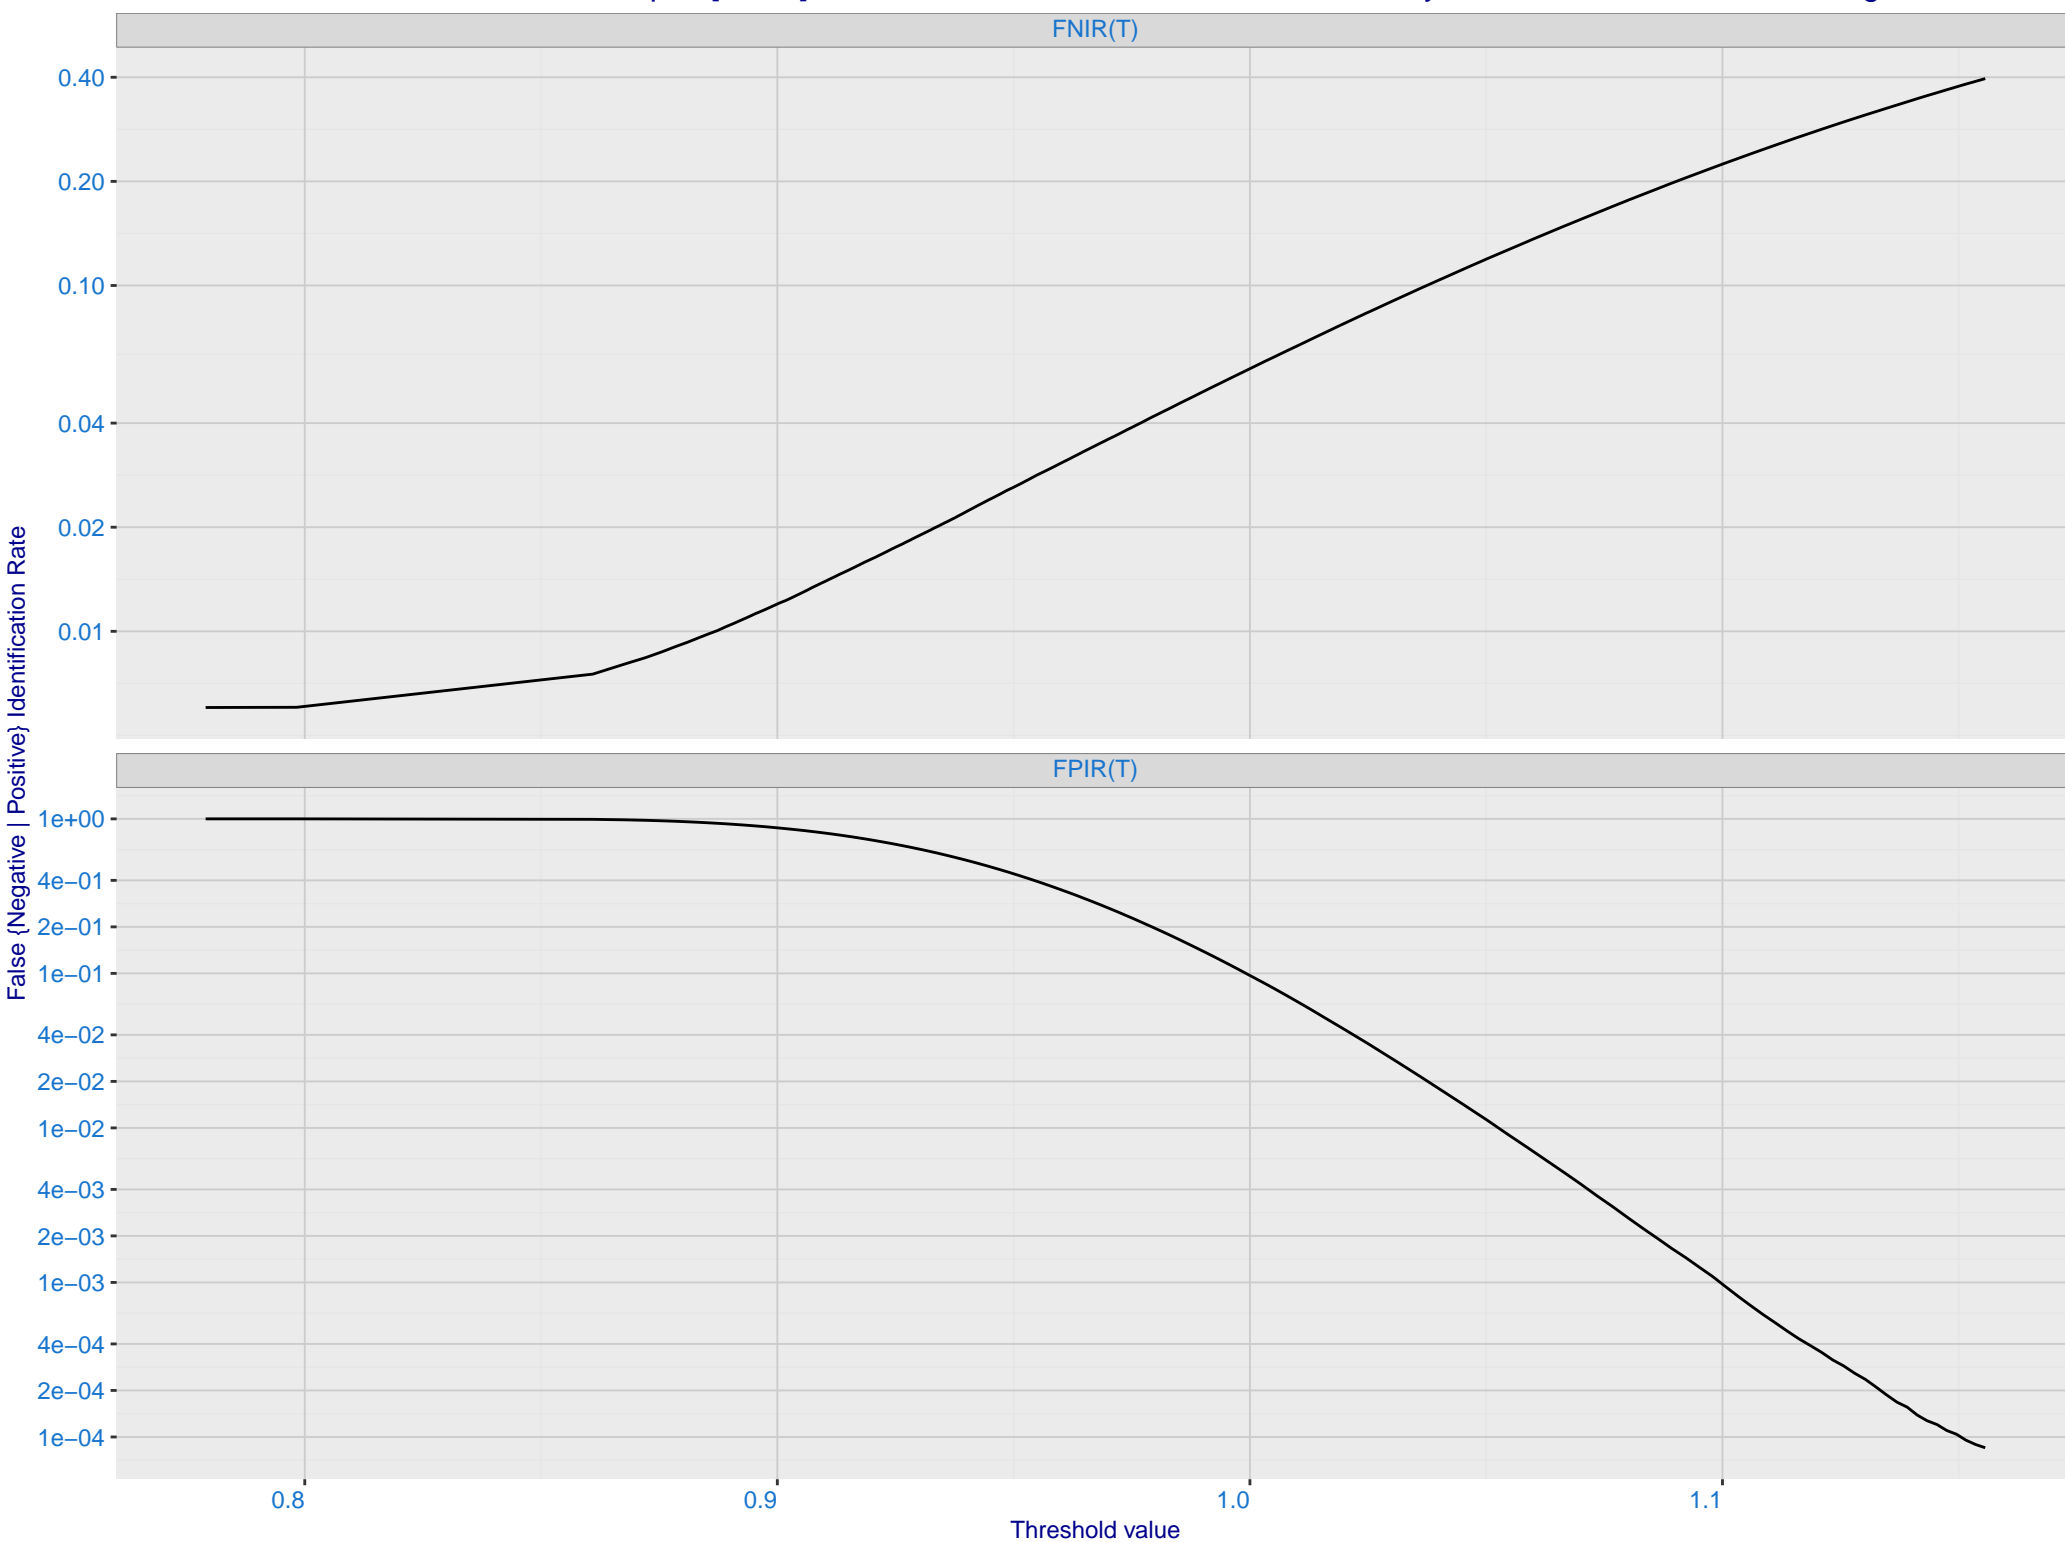


J: DET for Mugshot natural images and various N. Links connect points of equal threshold.

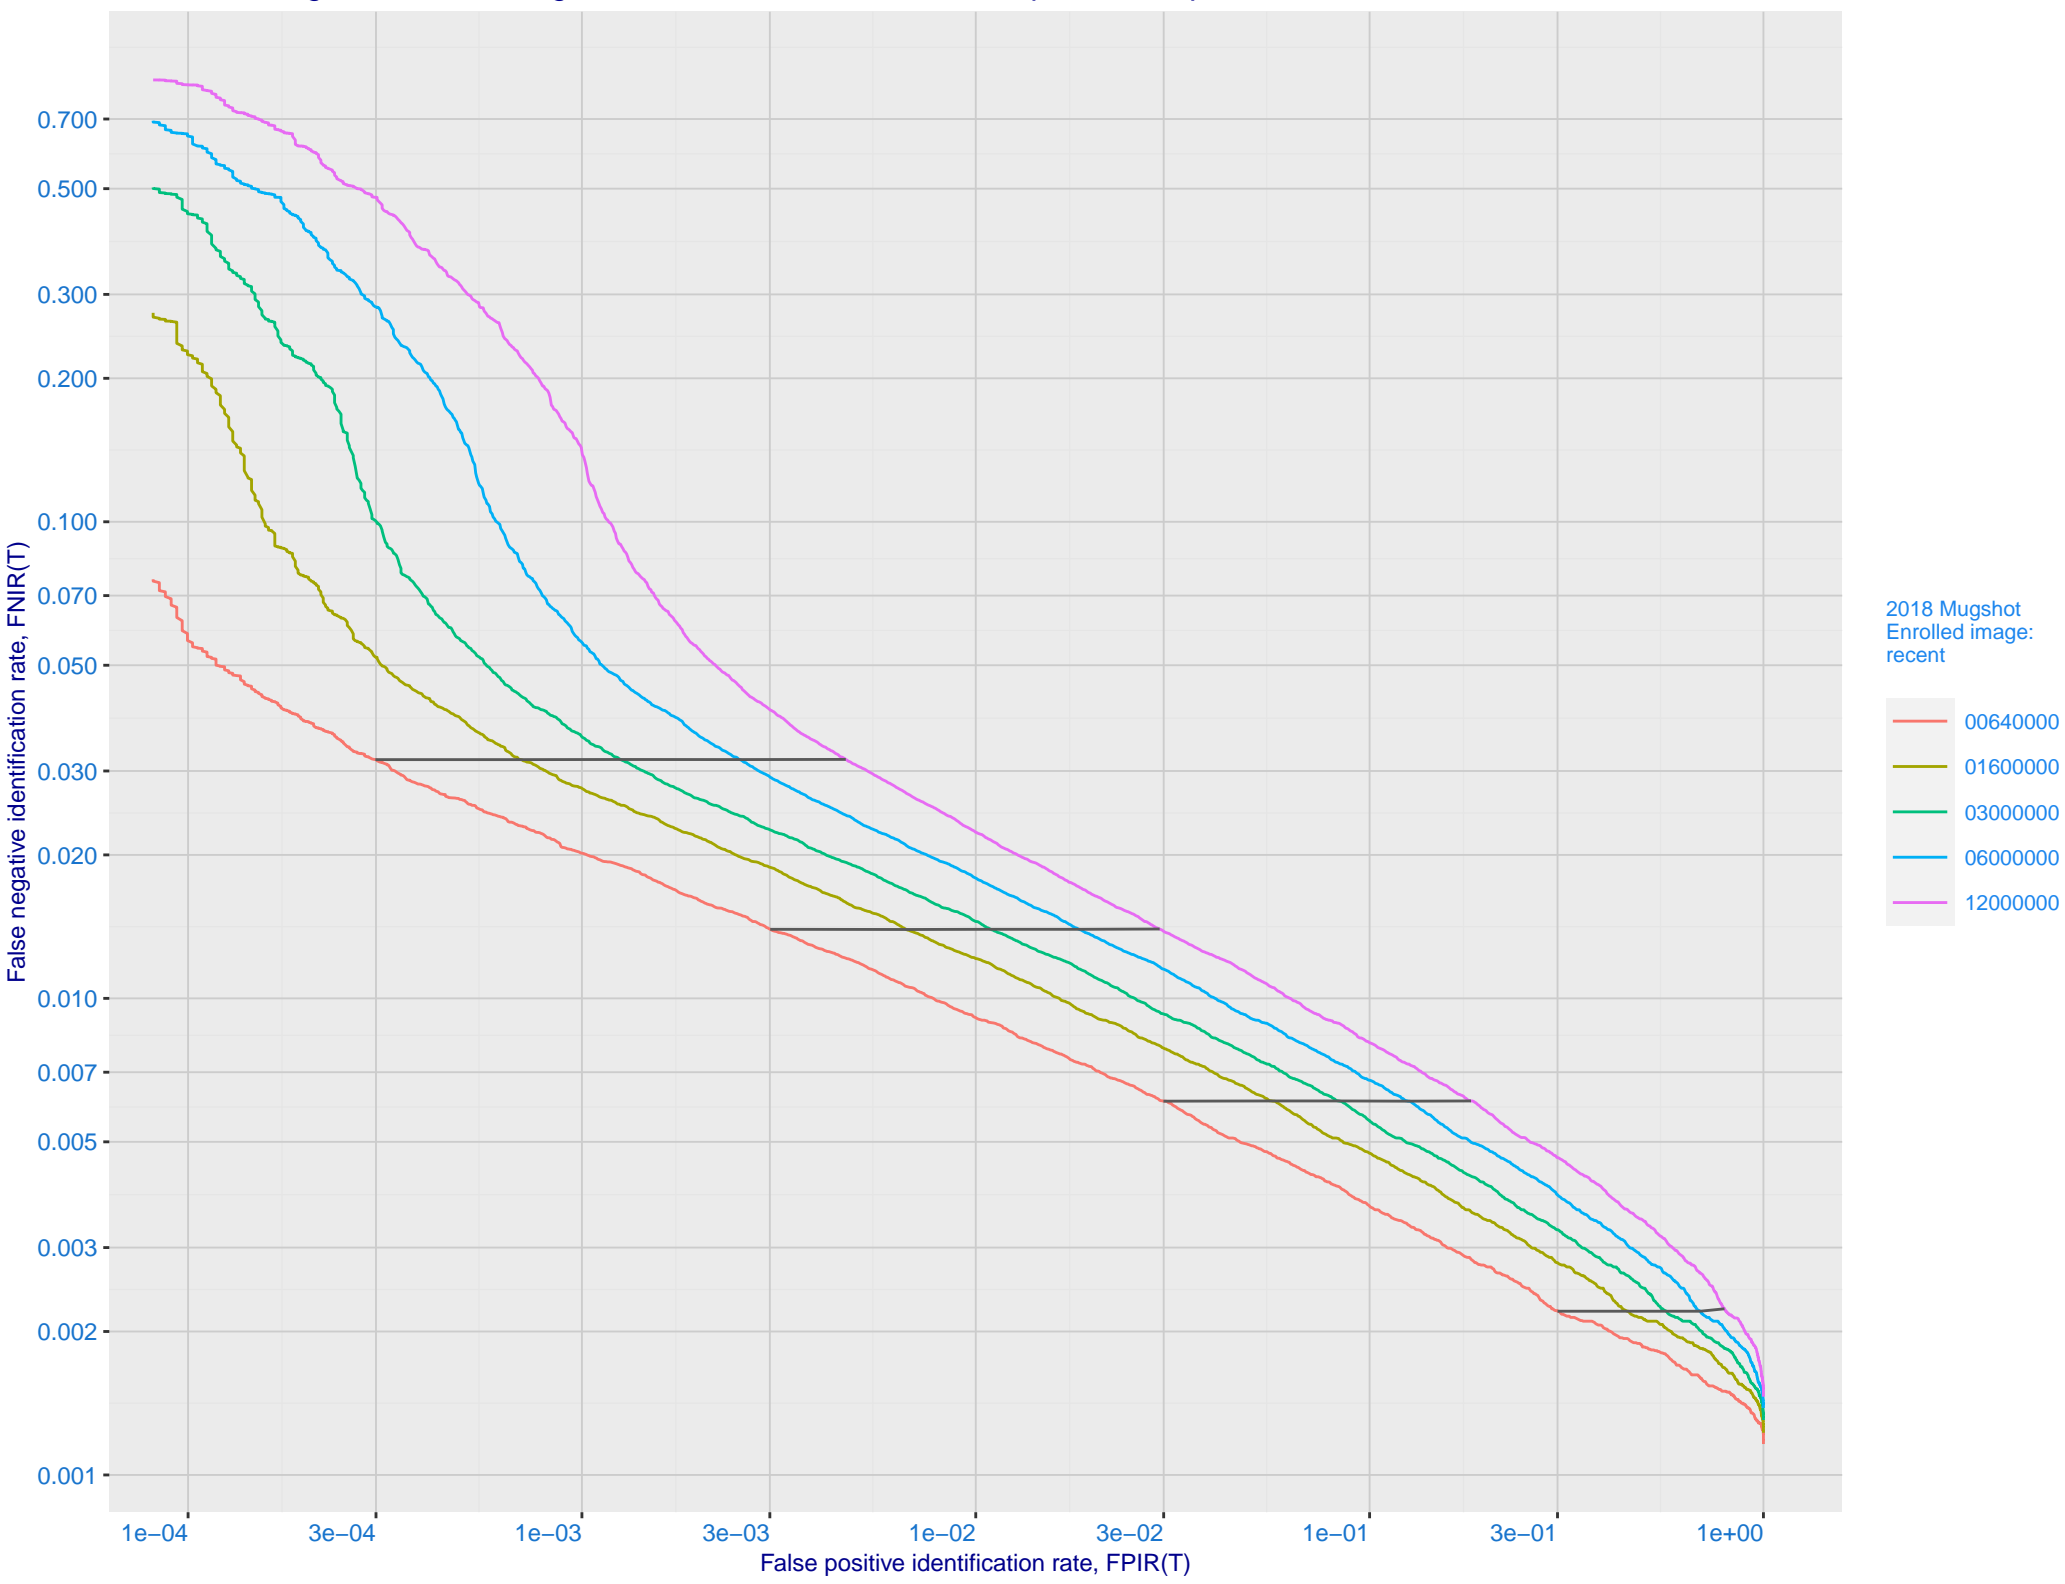


K: Investigational mode: FNIR(N, 1, 0) vs. most accurate (sensetime_006)

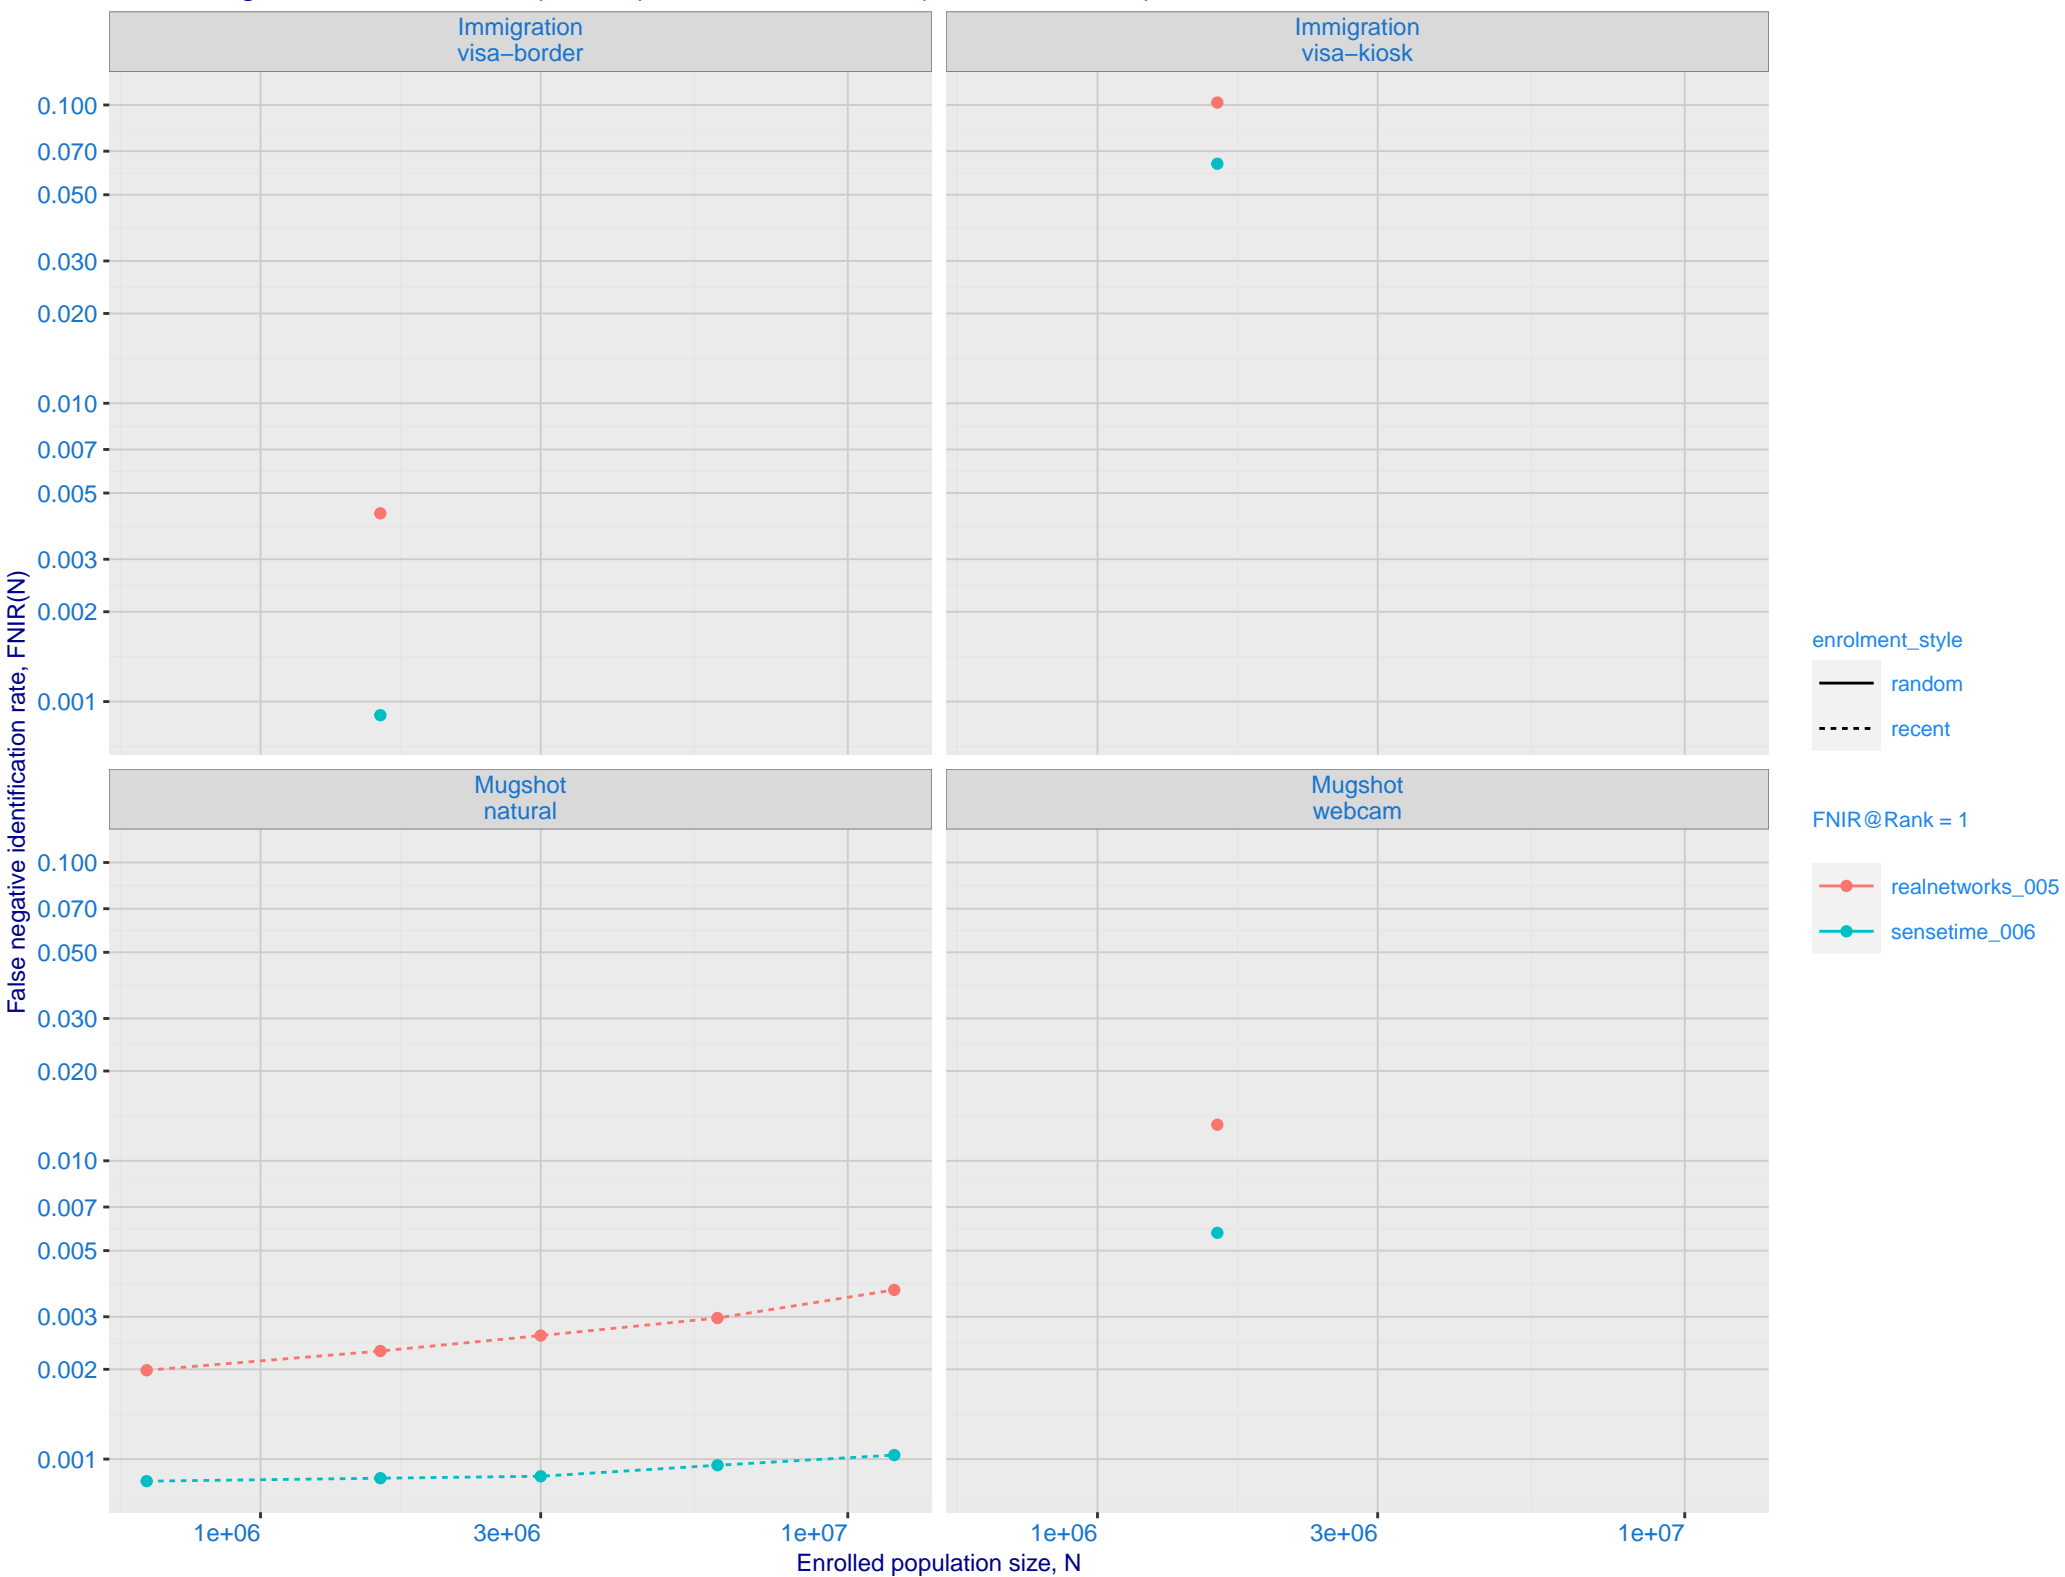

L: Investigational mode: FNIR(1600000, R, 0) by probe type

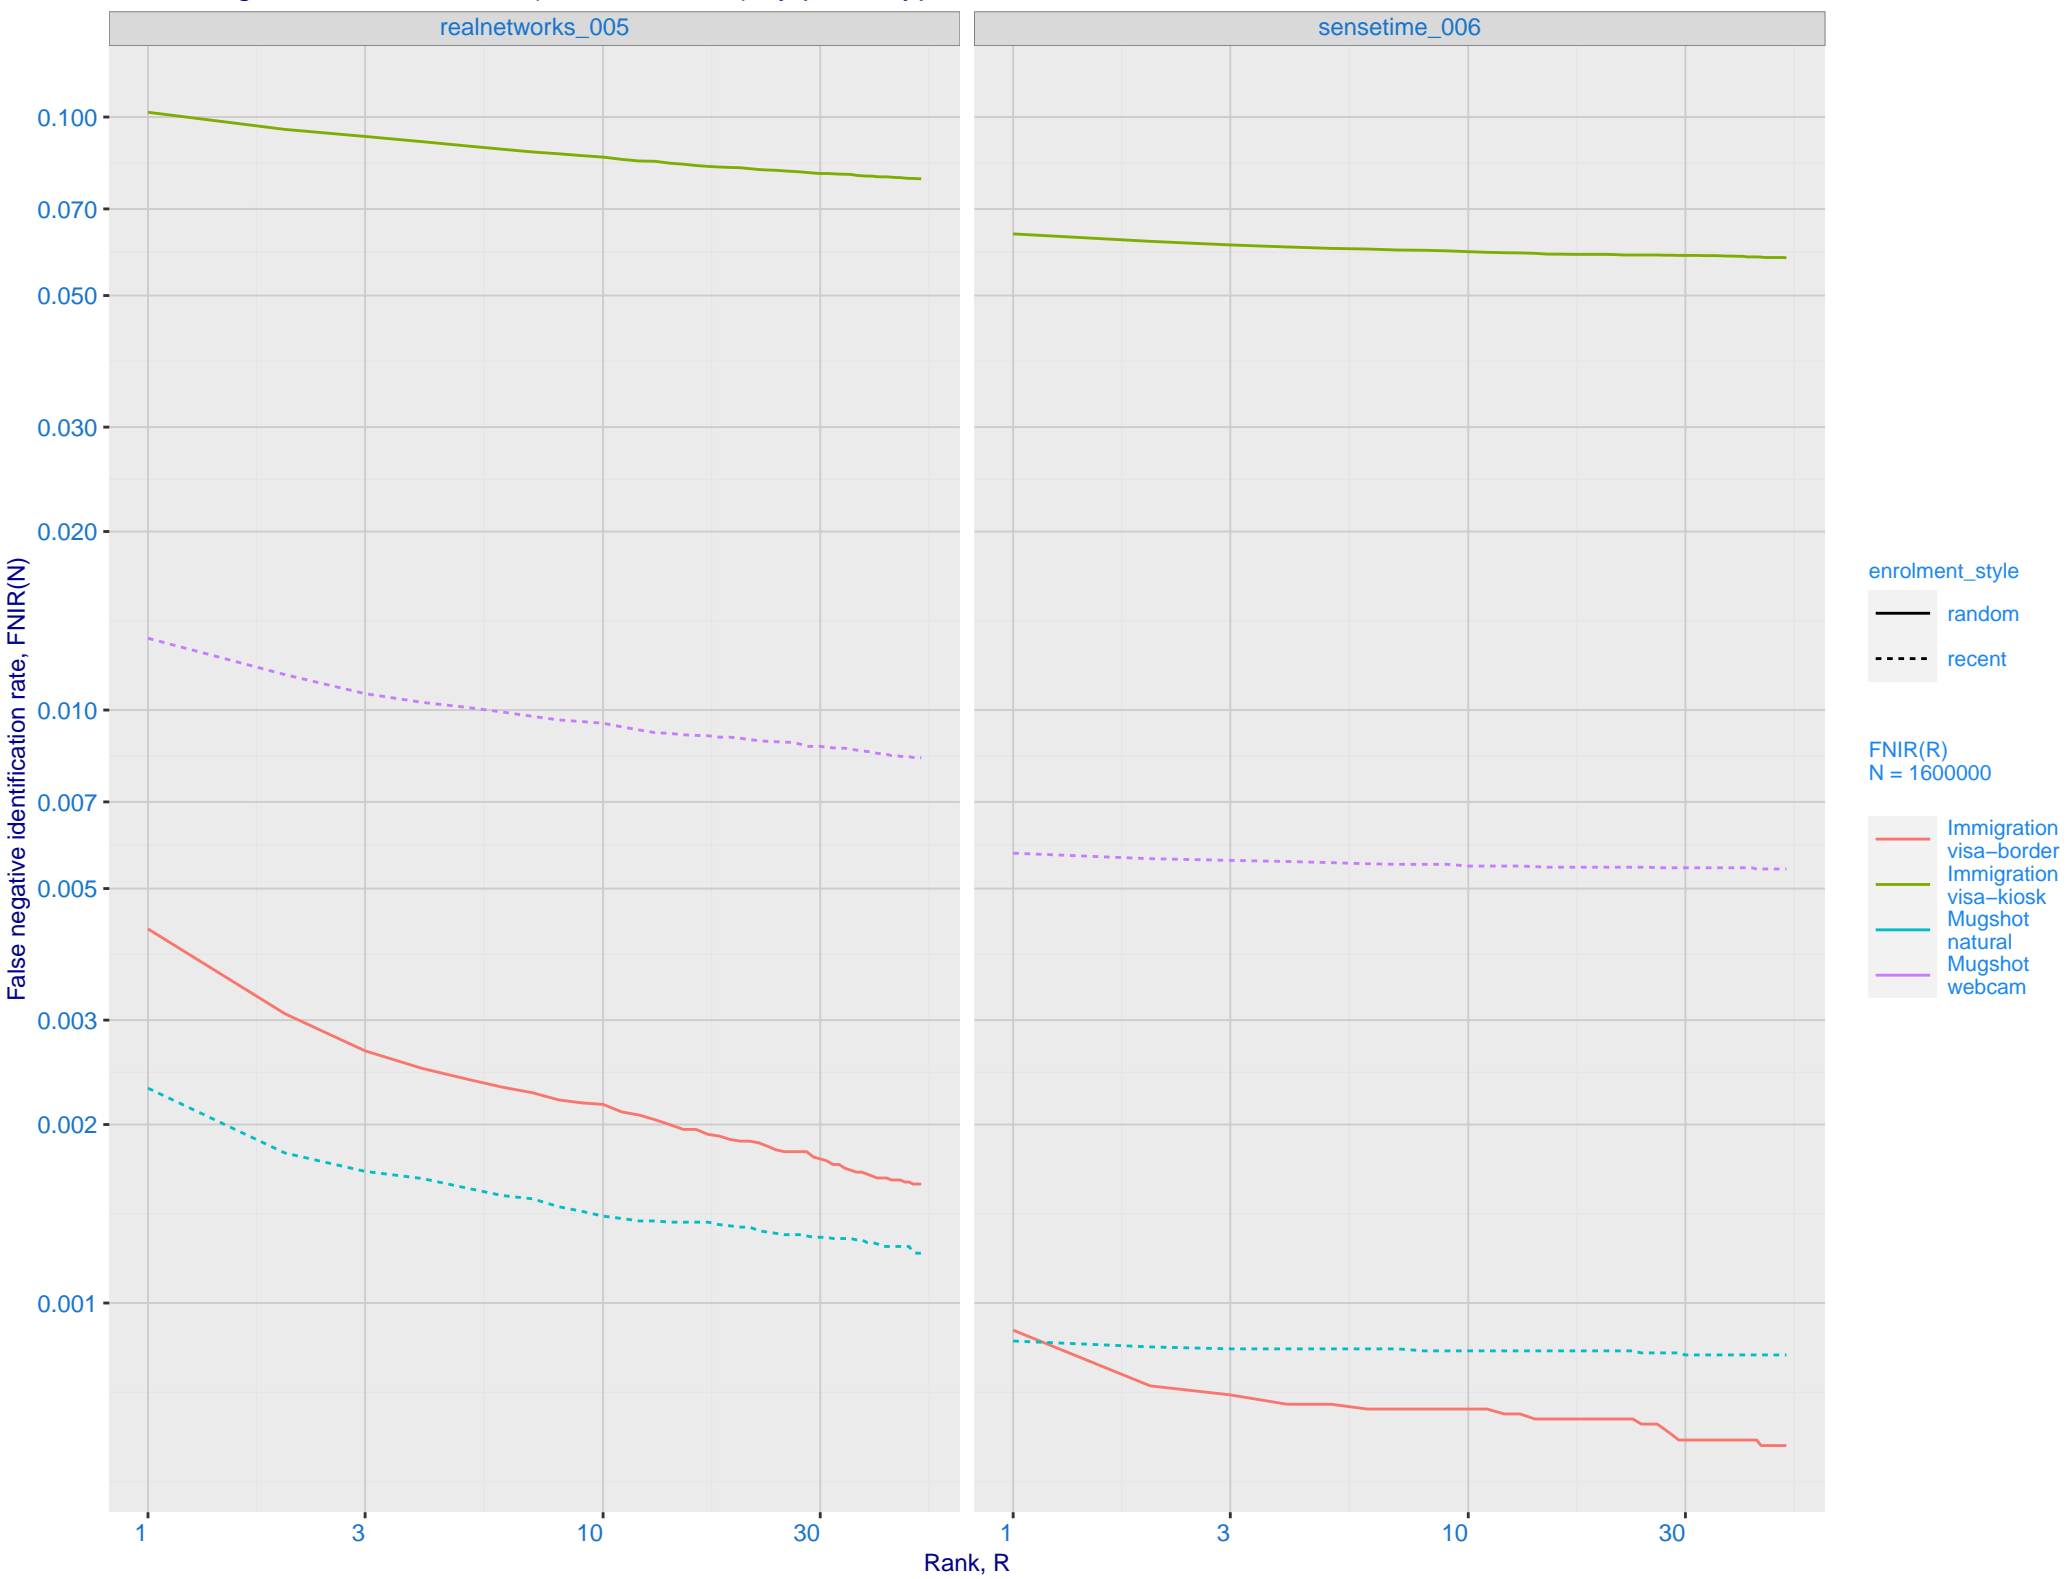


M: Template duration; search duration vs. N. The blue and pink ribbon covers 95 percent of observed measurements. The template generation time is independent of N. The log and power-law models are fit to the first two (N,T) observations

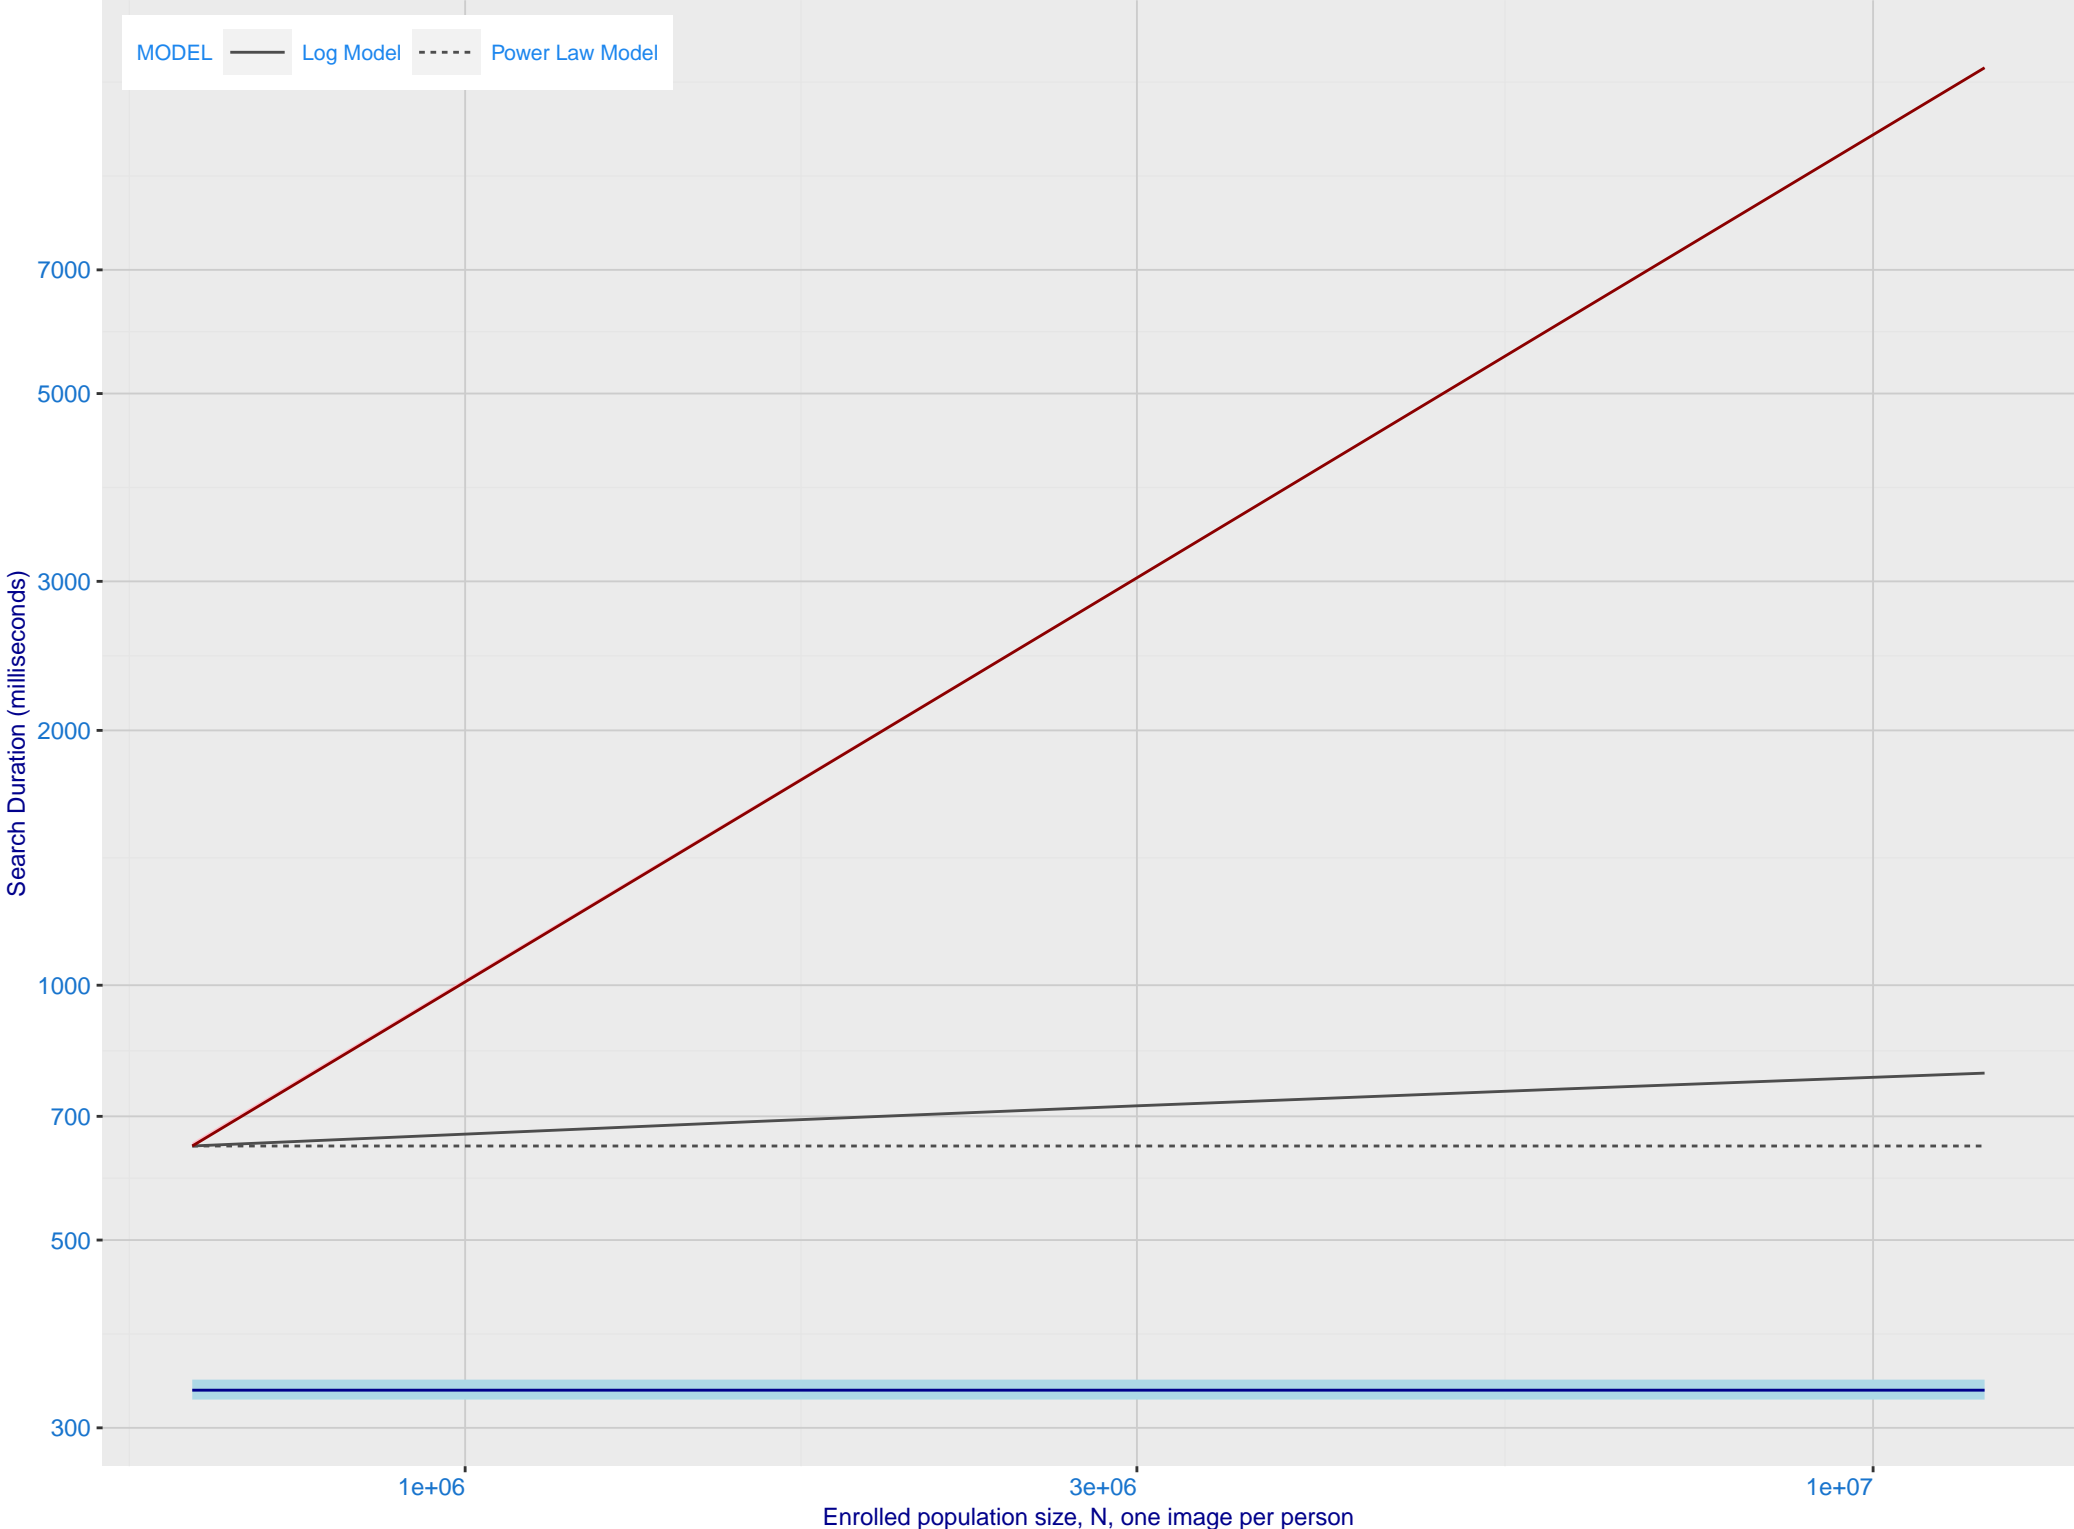

O: FNIR(T, N = 1.6 million) by sex, age and time-lapse. The top row gives investigational rank-1 miss rates. The bottom panels give high threshold for more lights-out identification with low FPIR.

Algorithm: realnetworks_005, Dataset: Border-Crossing Ageing N = 1600000
Text encodes FNIR, Color encodes log(FNIR)

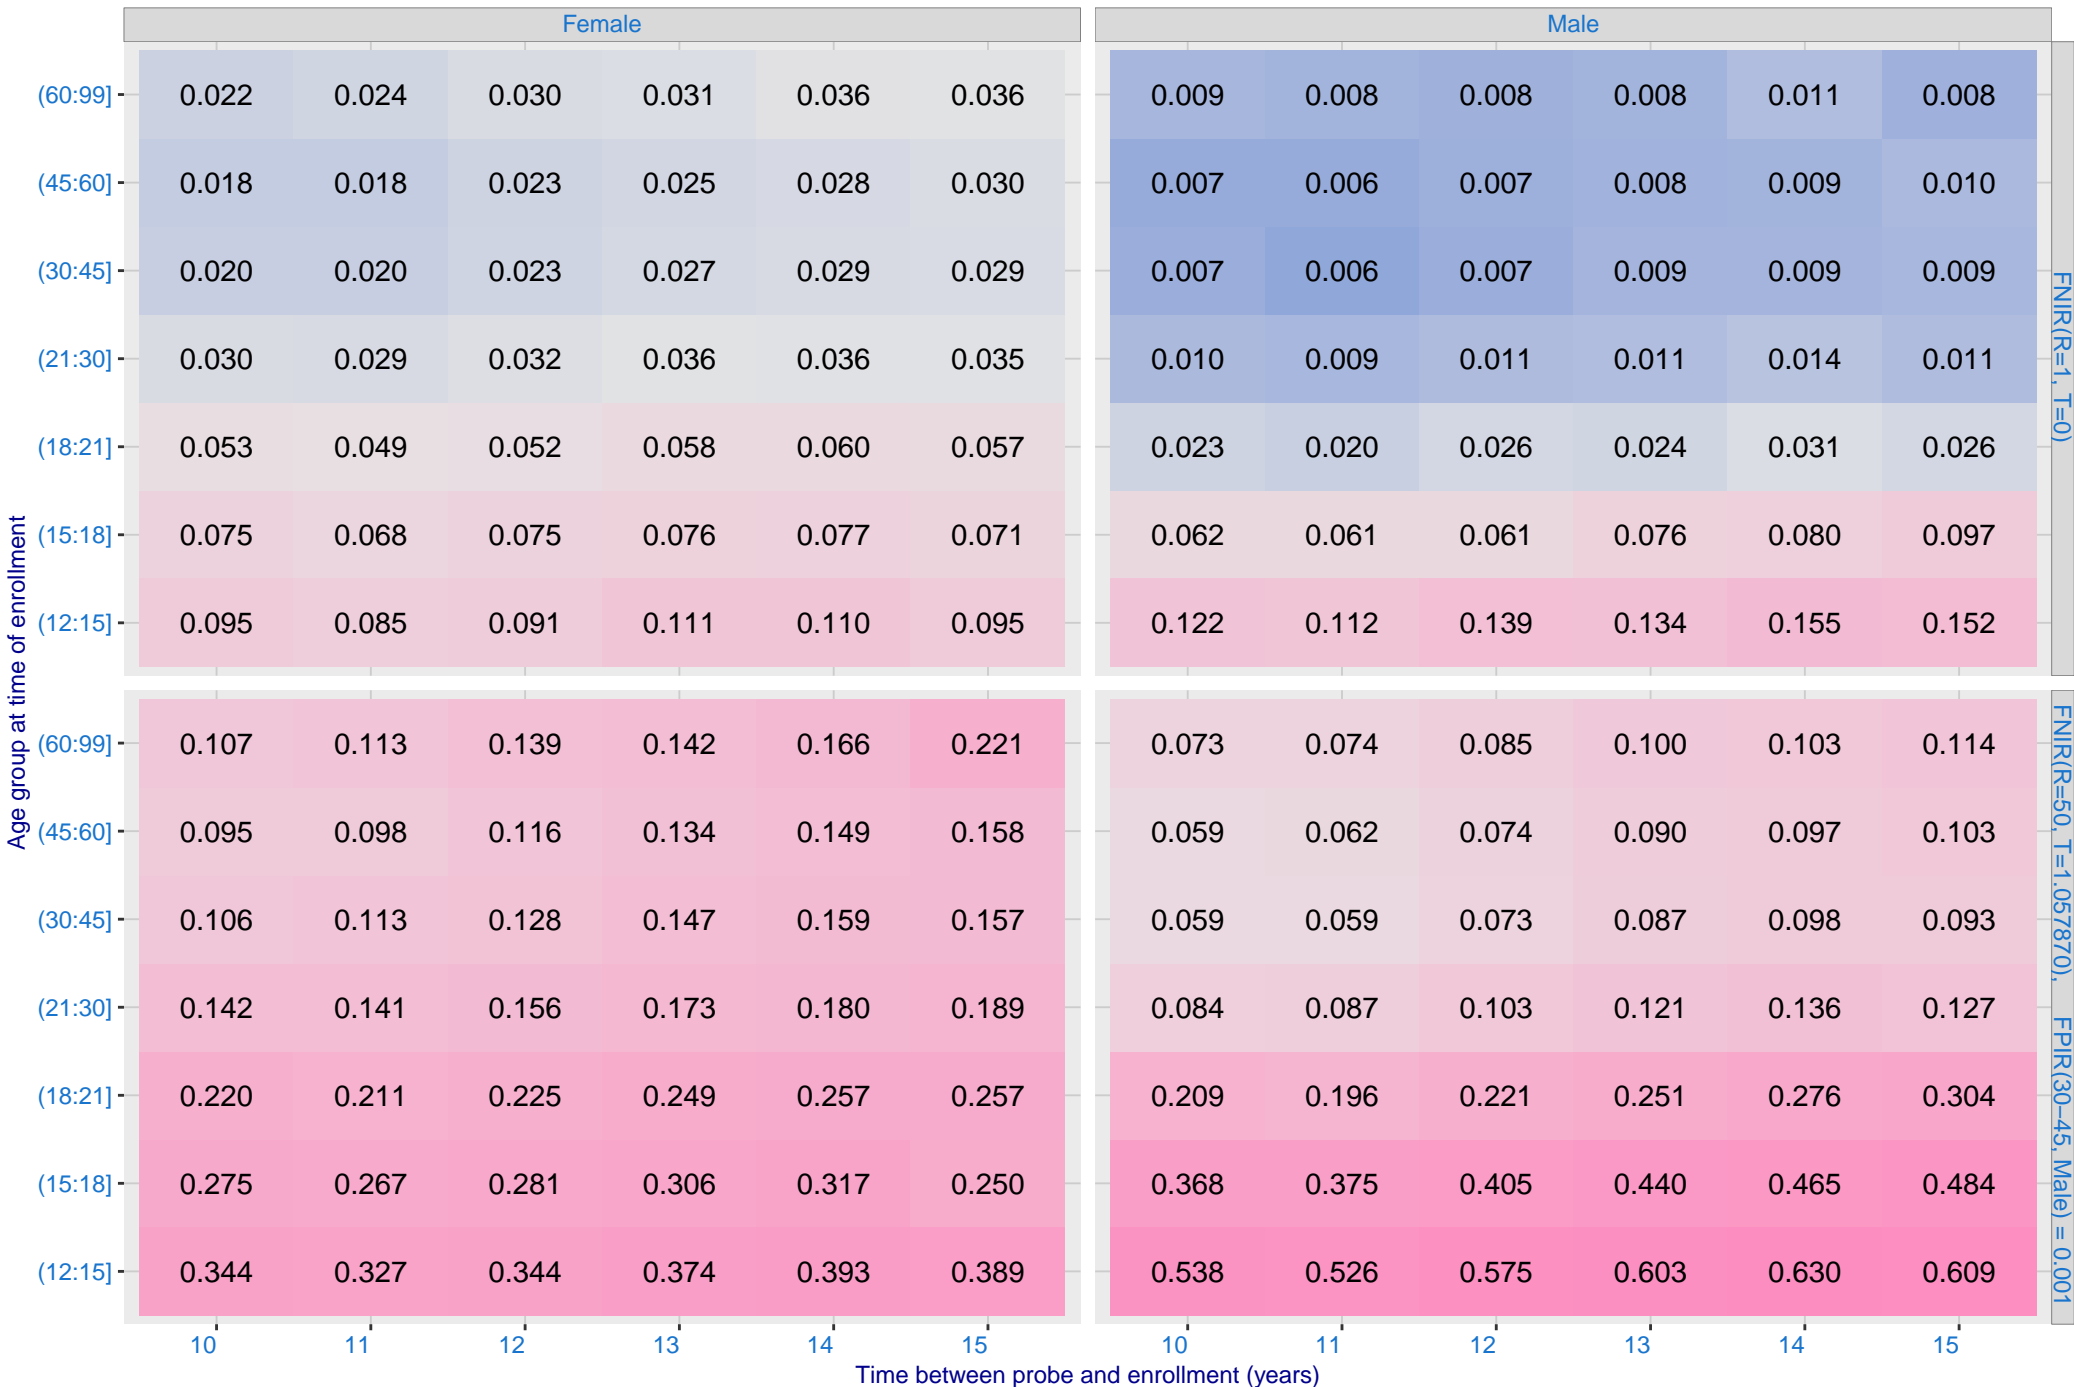

P: FPIR(N = 1.6 million) by sex and age. It is typical for false positive identification rates to be higher in women except in their teens.

Algorithm: realnetworks_005, Dataset: Border-Crossing Ageing
Threshold: 1.057870 set to achieve FPIR(30–45, Male) = 0.001

Color encodes log(FPIR)



Q: Identification FNIR(N, T, L+1) and Investigational FNIR(N, 0, R) under ageing

Dataset: 2018 Mugshot N = 3068801

