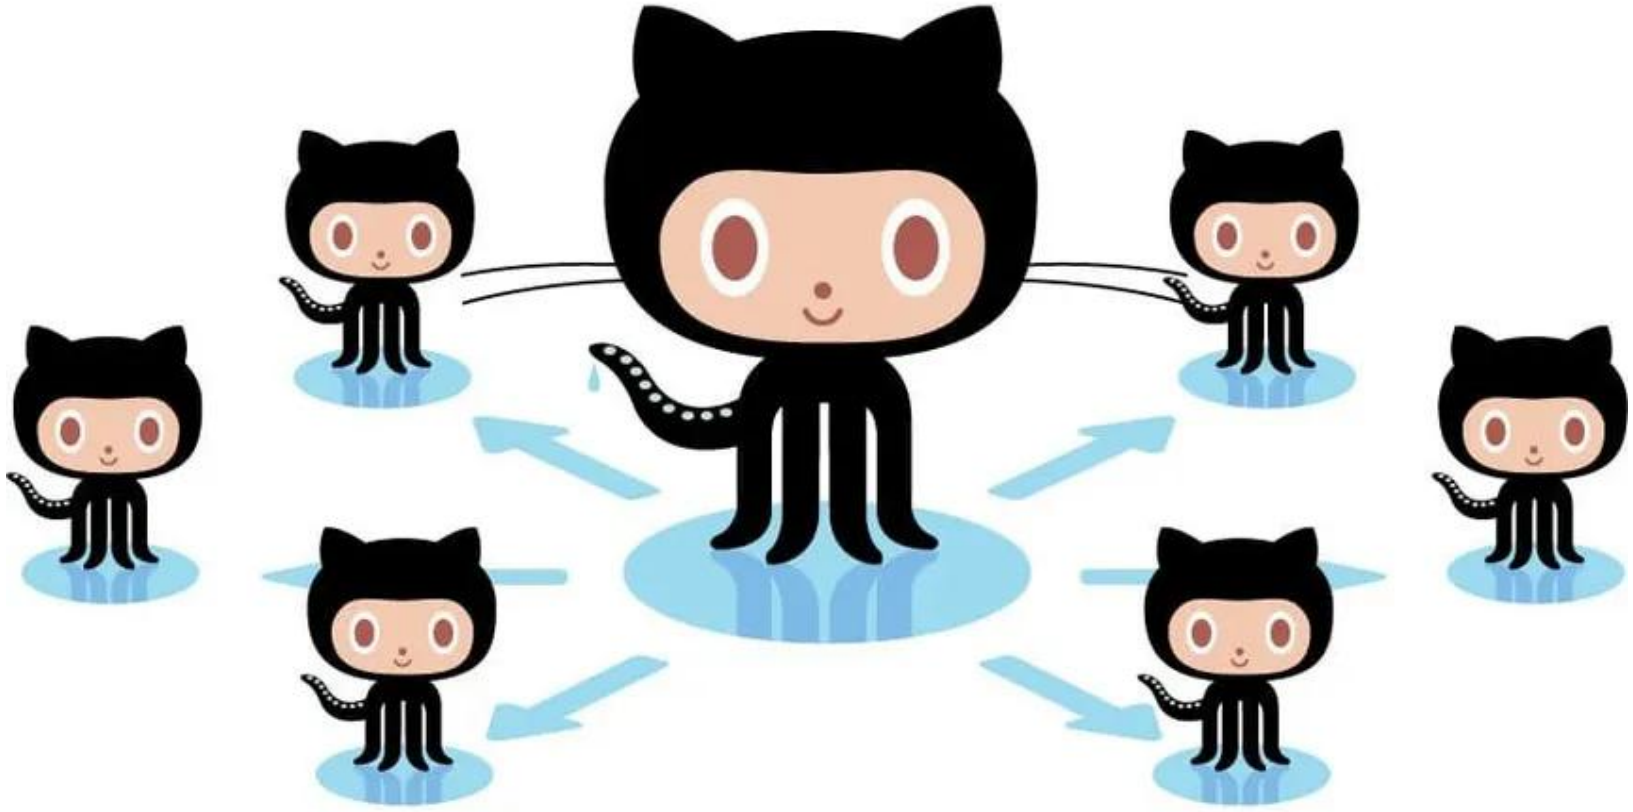

GitHub & Rstudio workshop

Jaclyn Aubin

March 19, 2026

Pre-workshop assignments

1. Update RStudio
2. Create a GitHub account
3. Send me your GitHub username and email
4. Download Git to your computer

Goals of this workshop

- Gain familiarity with GitHub and its R Studio interface
- Get comfortable using GitHub for version control
- Set yourself up for success by updating your R code to GitHub **often**

Definitions

- **Git**: version control software
- **GitHub**: a website that hosts Git repositories
- **Repository**: a folder on Github that stores all files and code for a project, along with the complete history of all changes
- **Committing**: saving your (annotated) edits locally
- **Pushing:** saving your edits to GitHub
- **Pulling:** downloading the latest version of a repo from GitHub

Why use GitHub?

- Keeps your code safely backed up
- Allows for version control (a time machine for your code)
- Allows for simultaneous collaborative coding
- The gold standard for sharing and publishing code
- Git is open source and GitHub is free for most applications

Intro/Refresher to R Studio

Churchill_Belugas - main - RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function | Addins

Project Churchill_Belugas

Splitting_wavs_by_scan_duration.R | sample_rows

Source on Save | Run | Source

Source

```r
#### SPLITTING WAV FILES BY SCAN DURATION ====

#Jaclyn AubiN
#Started Feb 2026

### Packages ----
Packages <- c("data.table", 'tuneR')
lapply(Packages, require, character.only = TRUE)

#define locations
wav_dir <- "D:/Hydrophone/Original wav files/"
output_dir <- "D:/Hydrophone/Split by scans/"

#make a list of files
wav_files <- sort(list.files(wav_dir, pattern = "\\.wav$", full.names = TRUE, recursive = TRUE))

#create a function to parse datetimes from wav filenames
parse_wav_time <- function(filename) {
  base <- tools::file_path_sans_ext(basename(filename))
  as.POSIXct(base, format = "%y%m%d_%H%M%S", tz = "America/Chicago")
}

#create a function to read wav chunks
```

Console | Terminal | Background Jobs

R 4.5.1 · ~/Sync/Repositories/Churchill_Belugas/

Console

```
+
+   data.table(
+     file_name      = sapply(meta, `[[`, "file"),
+     file_start     = as.POSIXct(sapply(meta, function(x) as.numeric(x$file_start)),
+                                 origin = "1970-01-01", tz = "America/Chicago"),
+     file_end       = as.POSIXct(sapply(meta, function(x) as.numeric(x$file_end)),
+                                 origin = "1970-01-01", tz = "America/Chicago"),
+     n_samples      = sapply(meta, `[[`, "n_samples"),
+     sample_rate    = sapply(meta, `[[`, "sample_rate"),
+     bit            = sapply(meta, `[[`, "bit"),
+     stereo         = sapply(meta, `[[`, "stereo"),
+     stringsAsFactors = FALSE
+   )
+ }
+
```

Environment | History | Connections | Git | Tutorial

Import Dataset | 143 MiB | List

R | Global Environment

Data	
cl	6 obs. of 4 variables
clips	6 obs. of 4 variables
sample_rows	5 obs. of 4 variables
Values	
output_dir	"D:/Hydrophone/Split by scans/"
Packages	chr [1:2] "data.table" "tuneR"
wav_dir	"D:/Hydrophone/Original wav files/"
wav_files	chr [1:345] "D:/Hydrophone/Origina…
Functions	
parse_wav_ti…	function (filename)

Files | Plots | Packages | Help | Viewer | Presentation

Home > Sync > Repositories > Churchill_Belugas

Name	Size	Modified
..		
.gitignore	766 B	Feb 24, 2026, 2:33
.RData	5.3 KB	Feb 26, 2026, 5:12
.Rhistory	986 B	Feb 26, 2026, 5:12
Churchill_Belugas.Rproj	267 B	Feb 27, 2026, 9:58
input		
output		
README.md	84 B	Feb 24, 2026, 2:33
scripts		

Churchill_Belugas - main - RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function | Addins | Churchill_Belugas

Splitting_wavs_by_scan_duration.R | sample_rows

Source on Save | Run | Source

```r
#### SPLITTING WAV FILES BY SCAN DURATION ====

#Jaclyn AubiN
#Started Feb 2026

### Packages ----
Packages <- c("data.table", 'tuneR')
lapply(Packages, require, character.only = TRUE)

#define locations
wav_dir <- "D:/Hydrophone/Original wav files/"
output_dir <- "D:/Hydrophone/Split by scans/"

#make a list of files
wav_files <- sort(list.files(wav_dir, pattern = "\\.wav$", full.names = TRUE, recursive = TRUE))

#create a function to parse datetimes from wav filenames
parse_wav_time <- function(filename) {
  base <- tools::file_path_sans_ext(basename(filename))
  as.POSIXct(base, format = "%y%m%d_%H%M%S", tz = "America/Chicago")
}

#create a function to read wav chunks
```

69:42 | Packages | R Script

Console | Terminal | Background Jobs

R 4.5.1 · ~/Sync/Repositories/Churchill_Belugas/

```
+
+   data.frame(
+     file        = sapply(meta, `[[`, "file"),
+     file_start  = as.POSIXct(sapply(meta, function(x) as.numeric(x$file_start)),
+                              origin = "1970-01-01", tz = "America/Chicago"),
+     file_end    = as.POSIXct(sapply(meta, function(x) as.numeric(x$file_end)),
+                              origin = "1970-01-01", tz = "America/Chicago"),
+     n_samples   = sapply(meta, `[[`, "n_samples"),
+     sample_rate = sapply(meta, `[[`, "sample_rate"),
+     bit         = sapply(meta, `[[`, "bit"),
+     stereo      = sapply(meta, `[[`, "stereo"),
+     stringsAsFactors = FALSE
+   )
+ }
+
```

Environment | History | Connections | Git | Tutorial

Import Dataset | 143 MiB | List

R | Global Environment

Data	
cl	6 obs. of 4 variables
clips	6 obs. of 4 variables
sample_rows	5 obs. of 4 variables
Values	
output_dir	"D:/Hydrophone/Split by scans/"
Packages	chr [1:2] "data.table" "tuneR"
wav_dir	"D:/Hydrophone/Original wav files/"
wav_files	chr [1:345] "D:/Hydrophone/Origina…
Functions	
parse_wav_ti…	function (filename)

Files | Plots | Packages | Help | Viewer | Presentation

Home > Sync > Repositories > Churchill_Belugas

Name	Size	Modified
..		
.gitignore	766 B	Feb 24, 2026, 2:33
.RData	5.3 KB	Feb 26, 2026, 5:12
.Rhistory	986 B	Feb 26, 2026, 5:12
Churchill_Belugas.Rproj	267 B	Feb 27, 2026, 9:58
input		
output		
README.md	84 B	Feb 24, 2026, 2:33
scripts		

Churchill_Belugas - main - RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function | Addins | Churchill_Belugas

Splitting_wavs_by_scan_duration.R | sample_rows

Source on Save | Run | Source

```r
#### SPLITTING WAV FILES BY SCAN DURATION ====

#Jaclyn AubiN
#Started Feb 2026

### Packages ----
Packages <- c("data.table", 'tuneR')
lapply(Packages, require, character.only = TRUE)

#define locations
wav_dir <- "D:/Hydrophone/Original wav files/"
output_dir <- "D:/Hydrophone/Split by scans/"

#make a list of files
wav_files <- sort(list.files(wav_dir, pattern = "\\.wav$", full.names = TRUE, recursive = TRUE))

#create a function to parse datetimes from wav filenames
parse_wav_time <- function(filename) {
  base <- tools::file_path_sans_ext(basename(filename))
  as.POSIXct(base, format = "%y%m%d_%H%M%S", tz = "America/Chicago")
}

#create a function to read wav chunks
```

69:42 | Packages | R Script

Console | Terminal | Background Jobs

R 4.5.1 · ~/Sync/Repositories/Churchill_Belugas/

```
+
+   data.frame(
+     file        = sapply(meta, `[[`, "file"),
+     file_start  = as.POSIXct(sapply(meta, function(x) as.numeric(x$file_start)),
+                              origin = "1970-01-01", tz = "America/Chicago"),
+     file_end    = as.POSIXct(sapply(meta, function(x) as.numeric(x$file_end)),
+                              origin = "1970-01-01", tz = "America/Chicago"),
+     n_samples   = sapply(meta, `[[`, "n_samples"),
+     sample_rate = sapply(meta, `[[`, "sample_rate"),
+     bit         = sapply(meta, `[[`, "bit"),
+     stereo      = sapply(meta, `[[`, "stereo"),
+     stringsAsFactors = FALSE
+   )
+ }
+
```

Environment | History | Connections | Git | Tutorial

Import Dataset | 143 MiB | List

R | Global Environment

Data	
cl	6 obs. of 4 variables
clips	6 obs. of 4 variables
sample_rows	5 obs. of 4 variables
Values	
output_dir	"D:/Hydrophone/Split by scans/"
Packages	chr [1:2] "data.table" "tuneR"
wav_dir	"D:/Hydrophone/Original wav files/"
wav_files	chr [1:345] "D:/Hydrophone/Origina…
Functions	
parse_wav_ti…	function (filename)

Files | Plots | Packages | Help | Viewer | Presentation

Home > Sync > Repositories > Churchill_Belugas

Name	Size	Modified
..		
.gitignore	766 B	Feb 24, 2026, 2:33
.RData	5.3 KB	Feb 26, 2026, 5:12
.Rhistory	986 B	Feb 26, 2026, 5:12
Churchill_Belugas.Rproj	267 B	Feb 27, 2026, 9:58
input		
output		
README.md	84 B	Feb 24, 2026, 2:33
scripts		

Churchill_Belugas - main - RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function | Addins | Churchill_Belugas

Splitting_wavs_by_scan_duration.R | sample_rows

Source on Save | Run | Source

```r
#### SPLITTING WAV FILES BY SCAN DURATION ====

#Jaclyn AubiN
#Started Feb 2026

### Packages ----
Packages <- c("data.table", 'tuneR')
lapply(Packages, require, character.only = TRUE)

#define locations
wav_dir <- "D:/Hydrophone/Original wav files/"
output_dir <- "D:/Hydrophone/Split by scans/"

#make a list of files
wav_files <- sort(list.files(wav_dir, pattern = "\\.wav$", full.names = TRUE, recursive = TRUE))

#create a function to parse datetimes from wav filenames
parse_wav_time <- function(filename) {
  base <- tools::file_path_sans_ext(basename(filename))
  as.POSIXct(base, format = "%y%m%d_%H%M%S", tz = "America/Chicago")
}

#create a function to read wav chunks
```

69:42 | Packages | R Script

Console | Terminal | Background Jobs

R 4.5.1 · ~/Sync/Repositories/Churchill_Belugas/

```
+
+   data.frame(
+     file        = sapply(meta, `[[`, "file"),
+     file_start  = as.POSIXct(sapply(meta, function(x) as.numeric(x$file_start)),
+                              origin = "1970-01-01", tz = "America/Chicago"),
+     file_end    = as.POSIXct(sapply(meta, function(x) as.numeric(x$file_end)),
+                              origin = "1970-01-01", tz = "America/Chicago"),
+     n_samples   = sapply(meta, `[[`, "n_samples"),
+     sample_rate = sapply(meta, `[[`, "sample_rate"),
+     bit         = sapply(meta, `[[`, "bit"),
+     stereo      = sapply(meta, `[[`, "stereo"),
+     stringsAsFactors = FALSE
+   )
+ }
+
```

Environment | History | Connections | Git | Tutorial

Import Dataset | 143 MiB | List

R | Global Environment

Data	
cl	6 obs. of 4 variables
clips	6 obs. of 4 variables
sample_rows	5 obs. of 4 variables
Values	
output_dir	"D:/Hydrophone/Split by scans/"
Packages	chr [1:2] "data.table" "tuneR"
wav_dir	"D:/Hydrophone/Original wav files/"
wav_files	chr [1:345] "D:/Hydrophone/Origina…
Functions	
parse_wav_ti…	function (filename)

Files | Plots | Packages | Help | Viewer | Presentation

Home > Sync > Repositories > Churchill_Belugas

Name	Size	Modified
..		
.gitignore	766 B	Feb 24, 2026, 2:33
.RData	5.3 KB	Feb 26, 2026, 5:12
.Rhistory	986 B	Feb 26, 2026, 5:12
Churchill_Belugas.Rproj	267 B	Feb 27, 2026, 9:58
input		
output		
README.md	84 B	Feb 24, 2026, 2:33
scripts		

Churchill_Belugas - main - RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function | Addins | Churchill_Belugas

Splitting_wavs_by_scan_duration.R | sample_rows

Source on Save | Run | Source

```r
#### SPLITTING WAV FILES BY SCAN DURATION ====

#Jaclyn AubiN
#Started Feb 2026

### Packages ----
Packages <- c("data.table", 'tuneR')
lapply(Packages, require, character.only = TRUE)

#define locations
wav_dir <- "D:/Hydrophone/Original wav files/"
output_dir <- "D:/Hydrophone/Split by scans/"

#make a list of files
wav_files <- sort(list.files(wav_dir, pattern = "\\.wav$", full.names = TRUE, recursive = TRUE))

#create a function to parse datetimes from wav filenames
parse_wav_time <- function(filename) {
  base <- tools::file_path_sans_ext(basename(filename))
  as.POSIXct(base, format = "%y%m%d_%H%M%S", tz = "America/Chicago")
}

#create a function to read wav chunks
```

69:42 | Packages | R Script

Console | Terminal | Background Jobs

R 4.5.1 · ~/Sync/Repositories/Churchill_Belugas/

```
+
+   data.frame(
+     file        = sapply(meta, `[[`, "file"),
+     file_start  = as.POSIXct(sapply(meta, function(x) as.numeric(x$file_start)),
+                              origin = "1970-01-01", tz = "America/Chicago"),
+     file_end    = as.POSIXct(sapply(meta, function(x) as.numeric(x$file_end)),
+                              origin = "1970-01-01", tz = "America/Chicago"),
+     n_samples   = sapply(meta, `[[`, "n_samples"),
+     sample_rate = sapply(meta, `[[`, "sample_rate"),
+     bit         = sapply(meta, `[[`, "bit"),
+     stereo      = sapply(meta, `[[`, "stereo"),
+     stringsAsFactors = FALSE
+   )
+ }
+
```

Environment | History | Connections | Git | Tutorial

Import Dataset | 143 MiB | List

R | Global Environment

Data	
cl	6 obs. of 4 variables
clips	6 obs. of 4 variables
sample_rows	5 obs. of 4 variables
Values	
output_dir	"D:/Hydrophone/Split by scans/"
Packages	chr [1:2] "data.table" "tuneR"
wav_dir	"D:/Hydrophone/Original wav files/"
wav_files	chr [1:345] "D:/Hydrophone/Origina…
Functions	
parse_wav_ti…	function (filename)

Files | Plots | Packages | Help | Viewer | Presentation

Home > Sync > Repositories > Churchill_Belugas

Name	Size	Modified
..		
.gitignore	766 B	Feb 24, 2026, 2:33
.RData	5.3 KB	Feb 26, 2026, 5:12
.Rhistory	986 B	Feb 26, 2026, 5:12
Churchill_Belugas.Rproj	267 B	Feb 27, 2026, 9:58
input		
output		
README.md	84 B	Feb 24, 2026, 2:33
scripts		

Step 1: Link Git to RStudio

GitHub-Workshop - main - RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function

Splitting_wavs_by_scan_duration.R

Source on Save

Run

Source

```
#### SPLITTING WAV FILES BY SCAN DURA

#Jaclyn AubiN
#Started Feb 2026

### Packages ----
Packages <- c("data.table", 'tuneR')
lapply(Packages, require, character.c

#define locations
wav_dir <- "D:/Hydrophone/Original wa
output_dir <- "D:/Hydrophone/Split by

#make a list of files
wav_files <- sort(list.files(wav_dir,                                  = TRUE, recursive = TRUE))

#create a function to parse datetimes
parse_wav_time <- function(filename)
  base <- tools::file_path_sans_ext(b
  as.POSIXct(base, format = "%y%m%d_%
}

#create a function to read wav chunks
read_wav_chunk <- function(filepath,
  w <- suppressWarnings(readWave(file                                  _sample, units = "samples"))
  Wave(left = w@left, samp.rate = w@samp.rate, bit = w@bit, pcm = TRUE)
}
```

- Install Packages...
- Check for Package Updates...
- Version Control >
- Terminal >
- Background Jobs >
- Addins >
- Memory >
- Keyboard Shortcuts Help Alt+Shift+K
- Modify Keyboard Shortcuts...
- Edit Code Snippets...
- Show Command Palette Ctrl+Shift+P
- Project Options...
- Global Options...

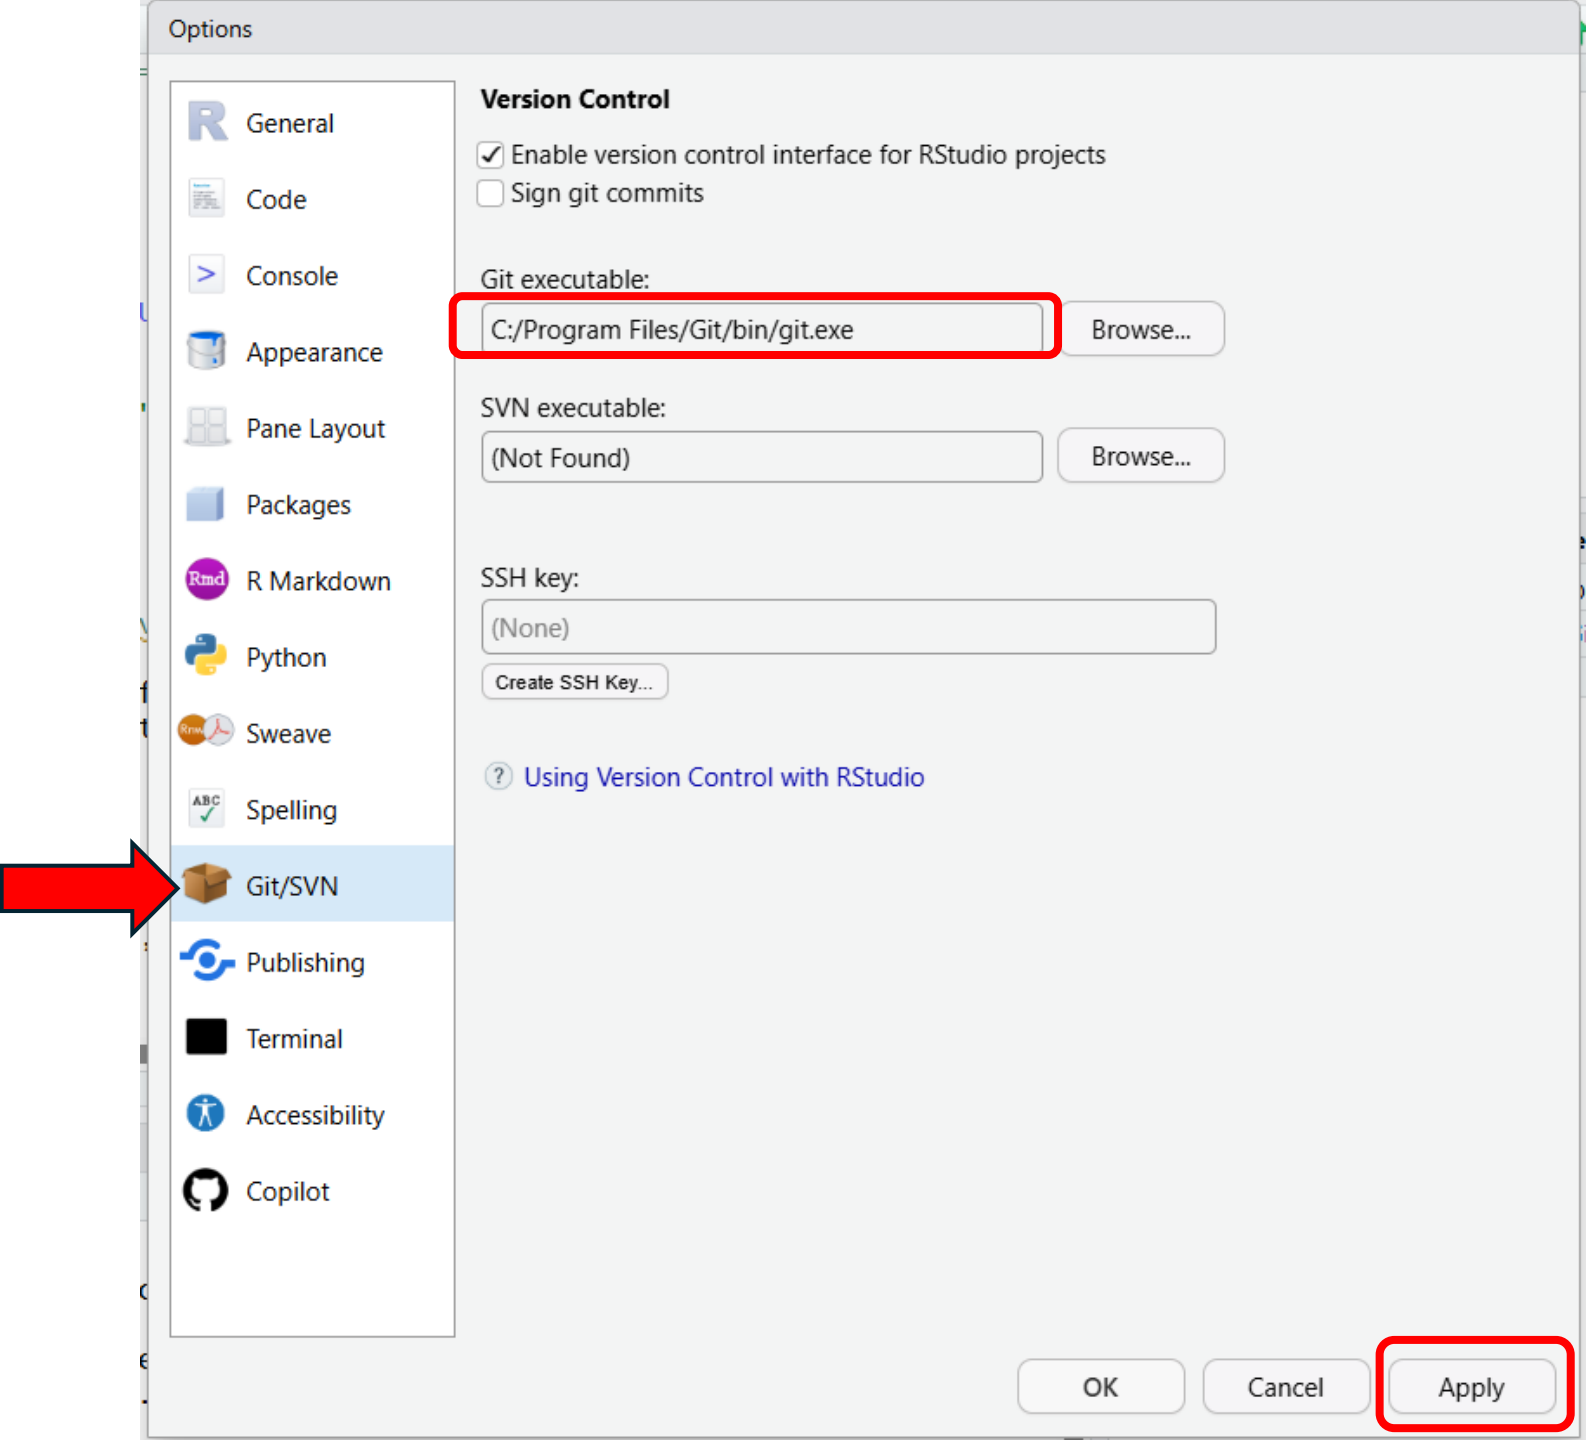

Windows

C:/Program Files/Git/bin/git.exe

Mac

/usr/bin/git

Step 2

- Load your credentials into the terminal

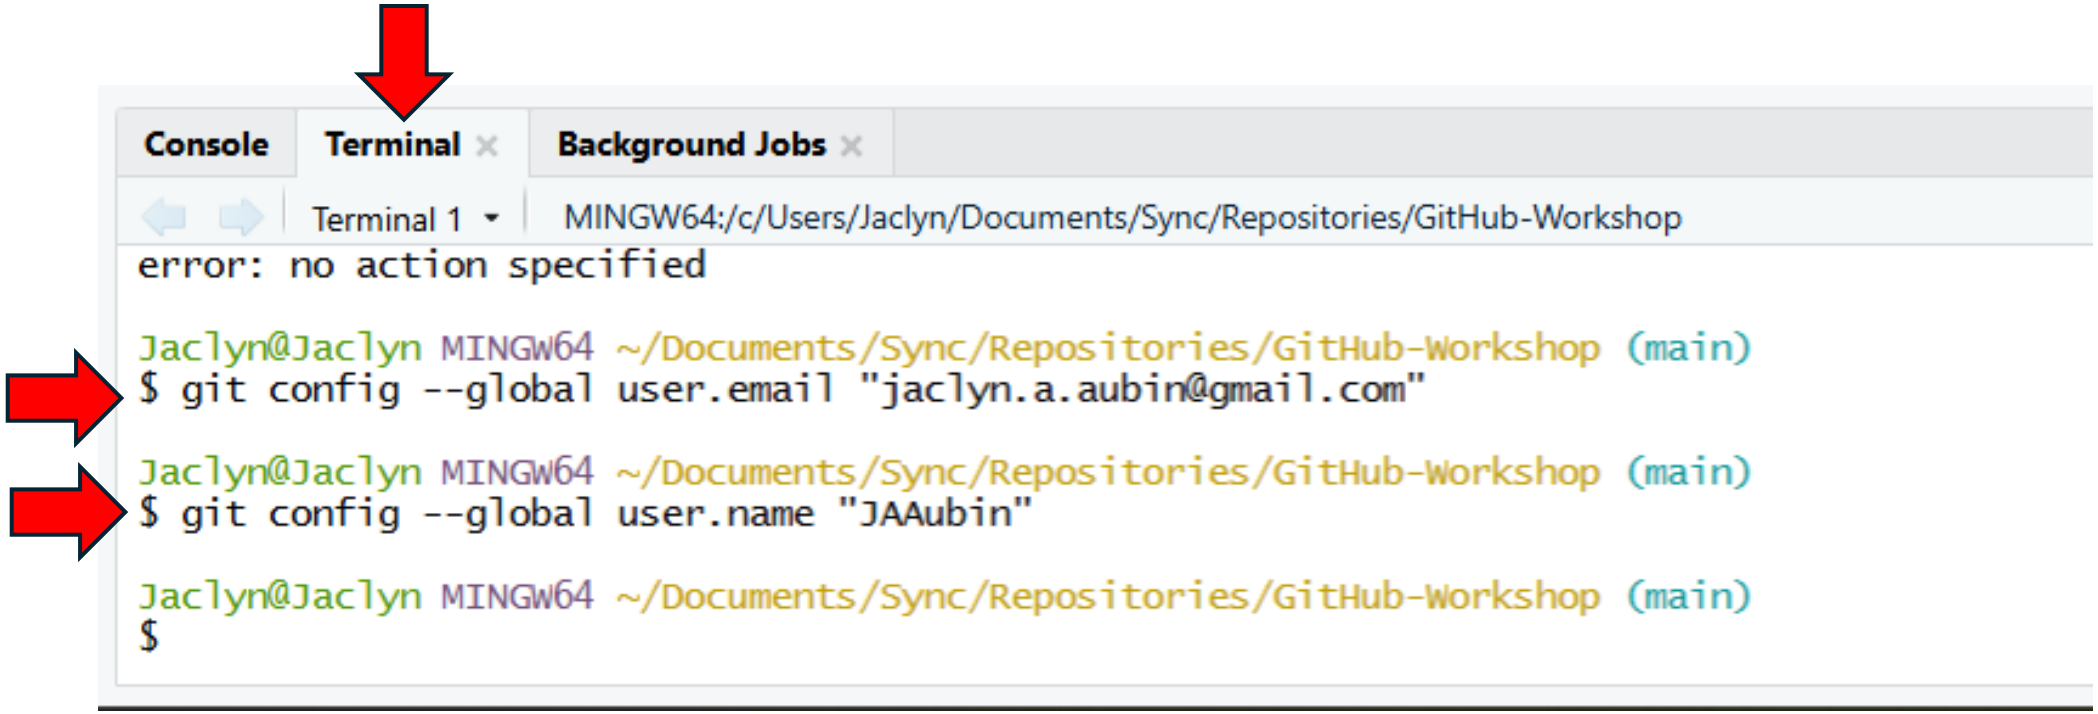


```
git config --global user.email "you@example.com"
git config --global user.name "Your Name"
```

Step 2: Install **gitcreds** package in R Studio

Churchill_Belugas - main - RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function | Addins | Churchill_Belugas

Console | Terminal | Background Jobs

R 4.5.1 · ~/Sync/Repositories/Churchill_Belugas/

```
R version 4.5.1 (2025-06-13 ucrt) -- "Great Square Root"
Copyright (C) 2025 The R Foundation for Statistical Computing
Platform: x86_64-w64-mingw32/x64

R is free software and comes with ABSOLUTELY NO WARRANTY.
You are welcome to redistribute it under certain conditions.
Type 'license()' or 'licence()' for distribution details.

  Natural language support but running in an English locale

R is a collaborative project with many contributors.
Type 'contributors()' for more information and
'citation()' on how to cite R or R packages in publications.

Type 'demo()' for some demos, 'help()' for on-line help, or
'help.start()' for an HTML browser interface to help.
Type 'q()' to quit R.

[Workspace loaded from ~/Sync/Repositories/Churchill_Belugas/.RData]

> |
```

Environment | History | Connections | Git | Tutorial

Import Dataset | 134 MiB | List

R | Global Environment

Data

cl	3 obs. of 4 variables
clips	3 obs. of 4 variables
dt	105 obs. of 108 variables
DT	101 obs. of 110 variables
DT0	25 obs. of 110 variables
DT0s	10 obs. of 110 variables
dt1	105 obs. of 108 variables
DT1m	24 obs. of 110 variables
DT1ms	10 obs. of 110 variables
DTc	5 obs. of 110 variables
DTcs	5 obs. of 110 variables
DTi	18 obs. of 110 variables
DTis	10 obs. of 110 variables
DTmm	29 obs. of 110 variables

Files | Plots | **Packages** | Help | Viewer | Presentation

Install | Update

Name	Description	Version
User Library		
abind	Combine Multidimensional Arrays	1.4-8
ape	Analyses of Phylogenetics and Evolution	5.8-1
askpass	Password Entry Utilities for R, Git, and SSH	1.2.1
backports	Reimplementations of Functions Introduced Since R-3.0.0	1.5.0
base64enc	Tools for base64 encoding	0.1-3
bestNormalize	Normalizing Transformation Functions	1.9.2
biotools	Tools for Biometry and Applied Statistics in Agricultural Science	4.3
bit	Classes and Methods for Fast	4.6.0

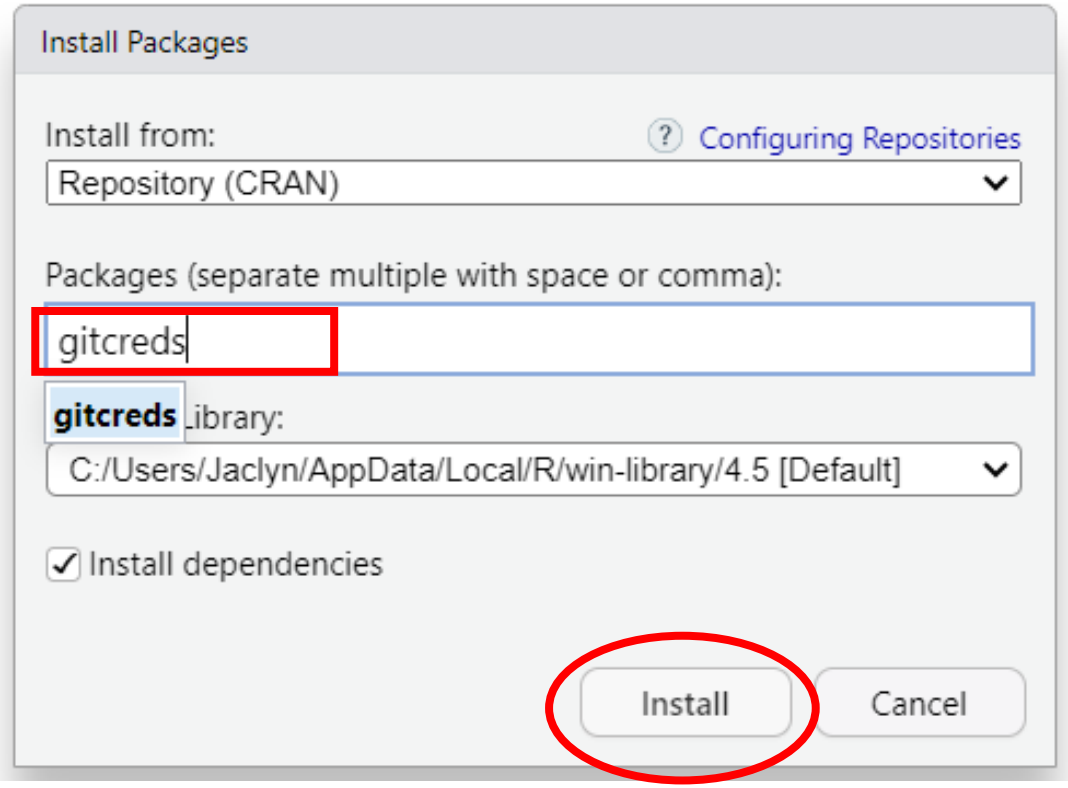
Install Packages
Install from:
Configuring Repositories
Repository (CRAN)
Packages (separate multiple with space or comma):
gitcreds
gitcreds
Library:
C:/Users/Jaclyn/AppData/Local/R/win-library/4.5 [Default]
Install dependencies
Install
Cancel

Step 3: Generate a GitHub Personal Access Token

JAAubin

Type / to search

Overview | Repositories 5 | Projects | Packages | Stars

JAAubin

Edit profile

Popular repositories

github-slideshow — Public

A robot powered training repository

Ruby

Calls_to_Communities

Using acoustic data to construct movement networks des
structure of St. Lawrence Estuary belugas

R

23 contributions in the last year

Contribution settings

Mar Apr May Jun Jul Aug Sep Oct Nov Dec Jan Feb Mar

Mon
Wed
Fri

Learn how we count contributions

Less More

Contribution activity

March 2026

Created 1 commit in 1 repository

JAAubin/SLE_Belugas 1 commit

JAAubin

Set status

Profile
Repositories
Stars
Gists
Organizations
Enterprises
Sponsors

Settings
Copilot settings
Feature preview New
Appearance
Accessibility
Try Enterprise Free

Sign out

Repositories

Codespaces

Models Preview

Packages

Copilot

Pages

Saved replies

Security

Code security

Integrations

Applications

Scheduled reminders

Archives

Security log

Sponsorship log

Developer settings

Scroll down

Social accounts

Link to social profile 1

Link to social profile 2

Link to social profile 3

Link to social profile 4

Company

You can **@mention** your company's GitHub organization to link it.

Location

☐ **Display current local time**

Other users will see the time difference from their local time.

ORCID iD

ORCID provides a persistent identifier - an ORCID iD - that distinguishes you from other researchers. Learn more at ORCID.org.

Connect your ORCID iD

All of the fields on this page are optional and can be deleted at any time, and by filling them out, you're giving us consent to share this data wherever your user profile appears. Please see our privacy statement to learn more about how we use this information.

Update profile

- GitHub Apps
- OAuth Apps
- Personal access tokens
  - Fine-grained tokens
  - Tokens (classic)

GitHub Apps

No GitHub Apps

Want to build something that integrates with and extends GitHub?
Register a new GitHub App to get started developing on the GitHub API.

New GitHub App

View documentation

Personal access tokens (classic)

Generate new token

Tokens you have generated that can be used to access the GitHub API.

Generate new token
Fine-grained, repo-scoped

Generate new token (classic)
For general use

RStudio3 — *repo*

Expires ***on Sat, Mar 6 2027***.

RStudio2 — *repo* Never used Delete

Expires ***on Sat, Mar 6 2027***.

RStudio — *public access* Never used Delete

Expires ***on Thu, Mar 26 2026***.

CMRnet installation — *repo* Never used Delete

Expired ***on Thu, Mar 5 2026***.

DESCRIBE THE TOKEN'S USE CASE — *gist, repo, user, workflow* Last used within the last 6 months Delete

Expired ***on Sun, Nov 2 2025***.

Confirm access

Signed in as **@JAAubin**

Password

••••••••••••

Forgot password?

Confirm

Tip: You are entering sudo mode. After you've performed a sudo-protected action, you'll only be asked to re-authenticate again after a few hours of inactivity.

New personal access token (classic)

Personal access tokens (classic) function like ordinary OAuth access tokens. They can be used instead of a password for Git over HTTPS, or can be used to authenticate to the API over Basic Authentication.

Note

RStudio credentials

What's this token for?

Expiration **Select date ***

Custom 2027-05-20

The token will expire on the selected date

Select scopes

Scopes define the access for personal tokens. Read more about OAuth scopes.

☑ **repo**	Full control of private repositories
☑ repo:status	Access commit status
☑ repo_deployment	Access deployment status
☑ public_repo	Access public repositories
☑ repo:invite	Access repository invitations
☑ security_events	Read and write security events
☐ **workflow**	Update GitHub Action workflows

Scroll to bottom

☐ manage_billing:copilot	View and edit Copilot Business seat assignments
☐ **write:network_configurations**	Write org hosted compute network configurations
☐ read:network_configurations	Read org hosted compute network configurations
☐ **project**	Full control of projects
☐ read:project	Read access of projects
☐ **admin:gpg_key**	Full control of public user GPG keys
☐ write:gpg_key	Write public user GPG keys
☐ read:gpg_key	Read public user GPG keys
☐ **admin:ssh_signing_key**	Full control of public user SSH signing keys
☐ write:ssh_signing_key	Write public user SSH signing keys
☐ read:ssh_signing_key	Read public user SSH signing keys

Generate token Cancel

Personal access tokens (classic)

Generate new token

Tokens you have generated that can be used to access the GitHub API.

Make sure to copy your personal access token now. You won't be able to see it again!

[redacted]

Delete

Step 4: Load your token into R Studio using **gitcreds_set()**

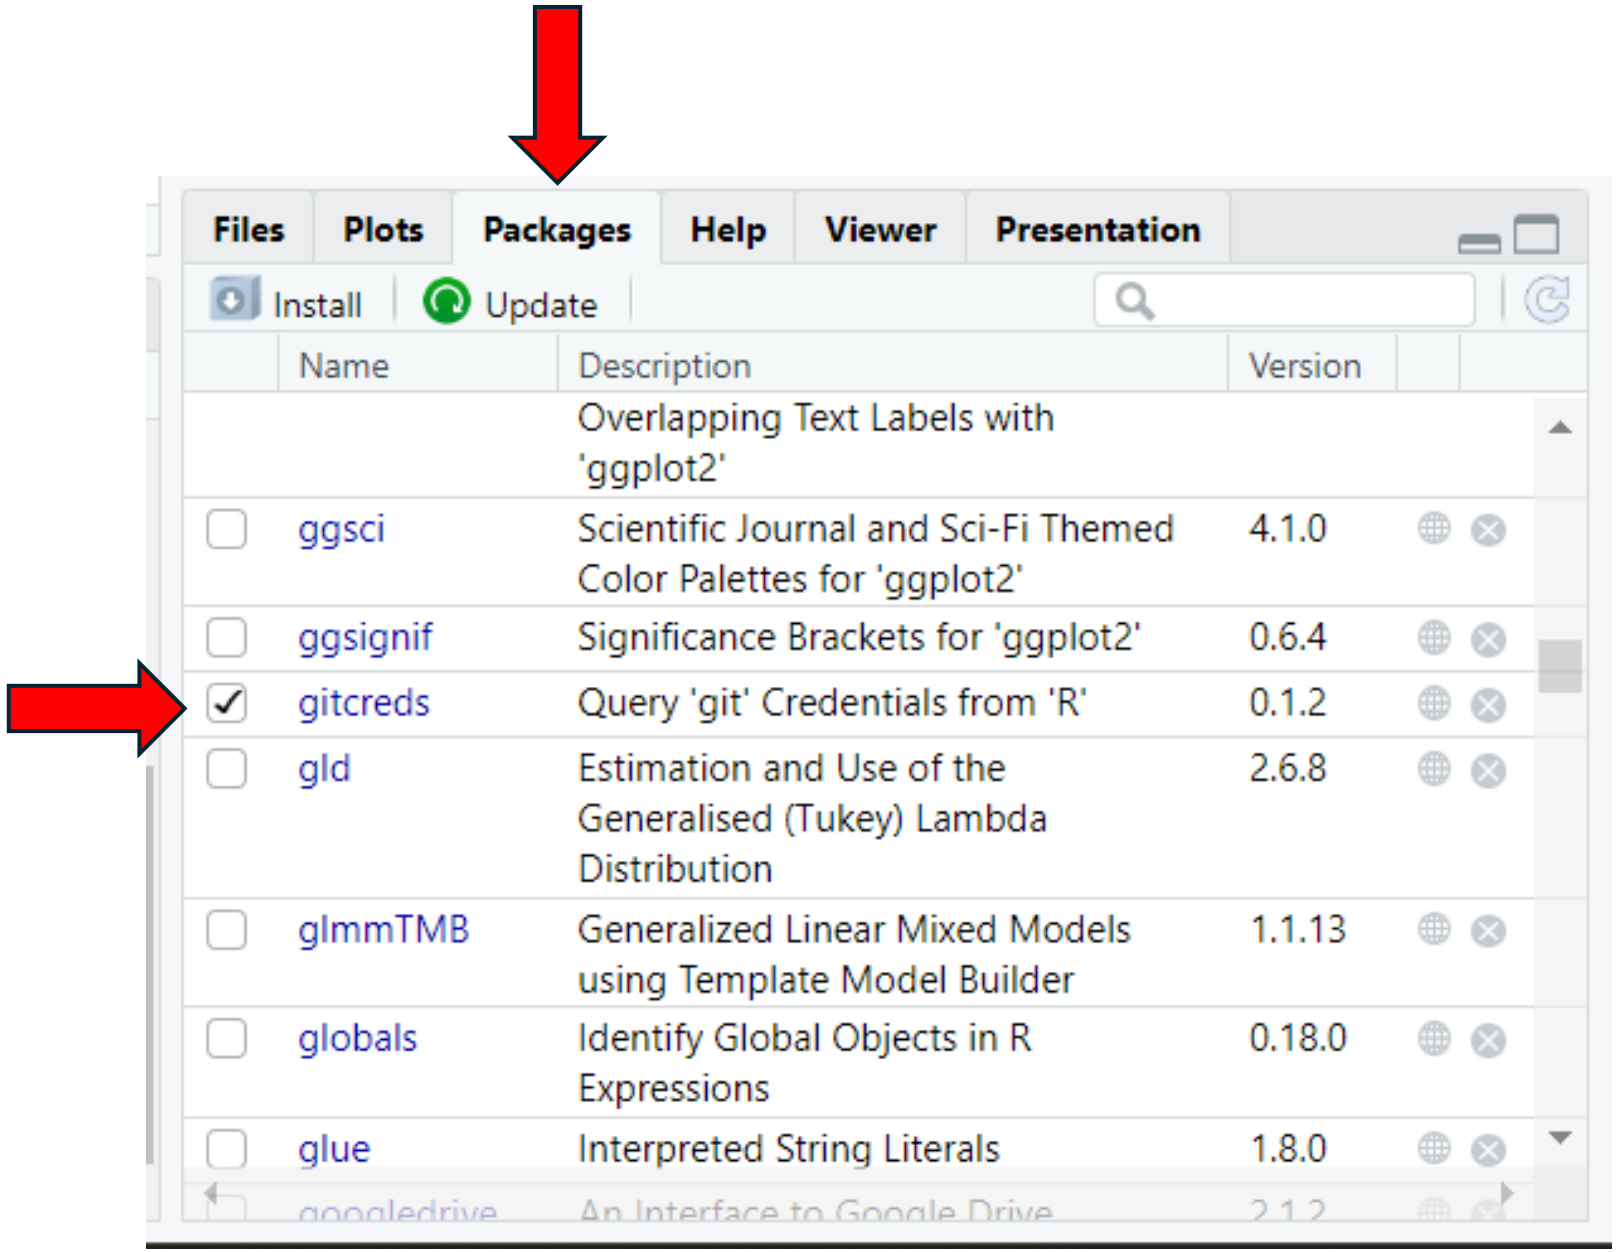
Files
Plots
Packages
Help
Viewer
Presentation
Install
Update
Name
Description
Version
Overlapping Text Labels with 'ggplot2'
ggsci
Scientific Journal and Sci-Fi Themed Color Palettes for 'ggplot2'
4.1.0
ggsignif
Significance Brackets for 'ggplot2'
0.6.4
gitcreds
Query 'git' Credentials from 'R'
0.1.2
gld
Estimation and Use of the Generalised (Tukey) Lambda Distribution
2.6.8
glmmTMB
Generalized Linear Mixed Models using Template Model Builder
1.1.13
globals
Identify Global Objects in R Expressions
0.18.0
glue
Interpreted String Literals
1.8.0

Splitting_wavs_by_scan_duration.R*

Source on Save

Run

Source

```
gitcreds_set()
```

```
gitcreds_set()
```

(Top Level)

Console | Terminal | Background Jobs

R 4.5.1 · ~/Sync/Repositories/GitHub-Workshop/

```
  password: <-- hidden -->

-> What would you like to do?

1: Abort update with error, and keep the existing credentials
2: Replace these credentials
3: See the password / token

Selection: 2
```

```
175
176
177
```

Packages

Console | Terminal | Background Jobs

R 4.5.1 · ~/Sync/Repositories/Churchill_Belugas/

```
> gitcreds_set()

? Enter password or token:
```

Step 5: Connect to the repo for this workshop

Churchill_Belugas - main - RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Addins

Run Source

R Script

New File
New Project...
Open File... Ctrl+O
Open File in New Column...
Reopen with Encoding...
Recent Files
Open Project...
Open Project in New Session...
Recent Projects
Import Dataset
Save Ctrl+S
Save As...
Rename
Save with Encoding...
Save All Alt+Ctrl+S
Compile Report...
Print...
Close Ctrl+W
Close All Ctrl+Shift+W
Close All Except Current Alt+Ctrl+Shift+W

j3Yilp1GNhkMXrJ6A587jkhj0JIDsy

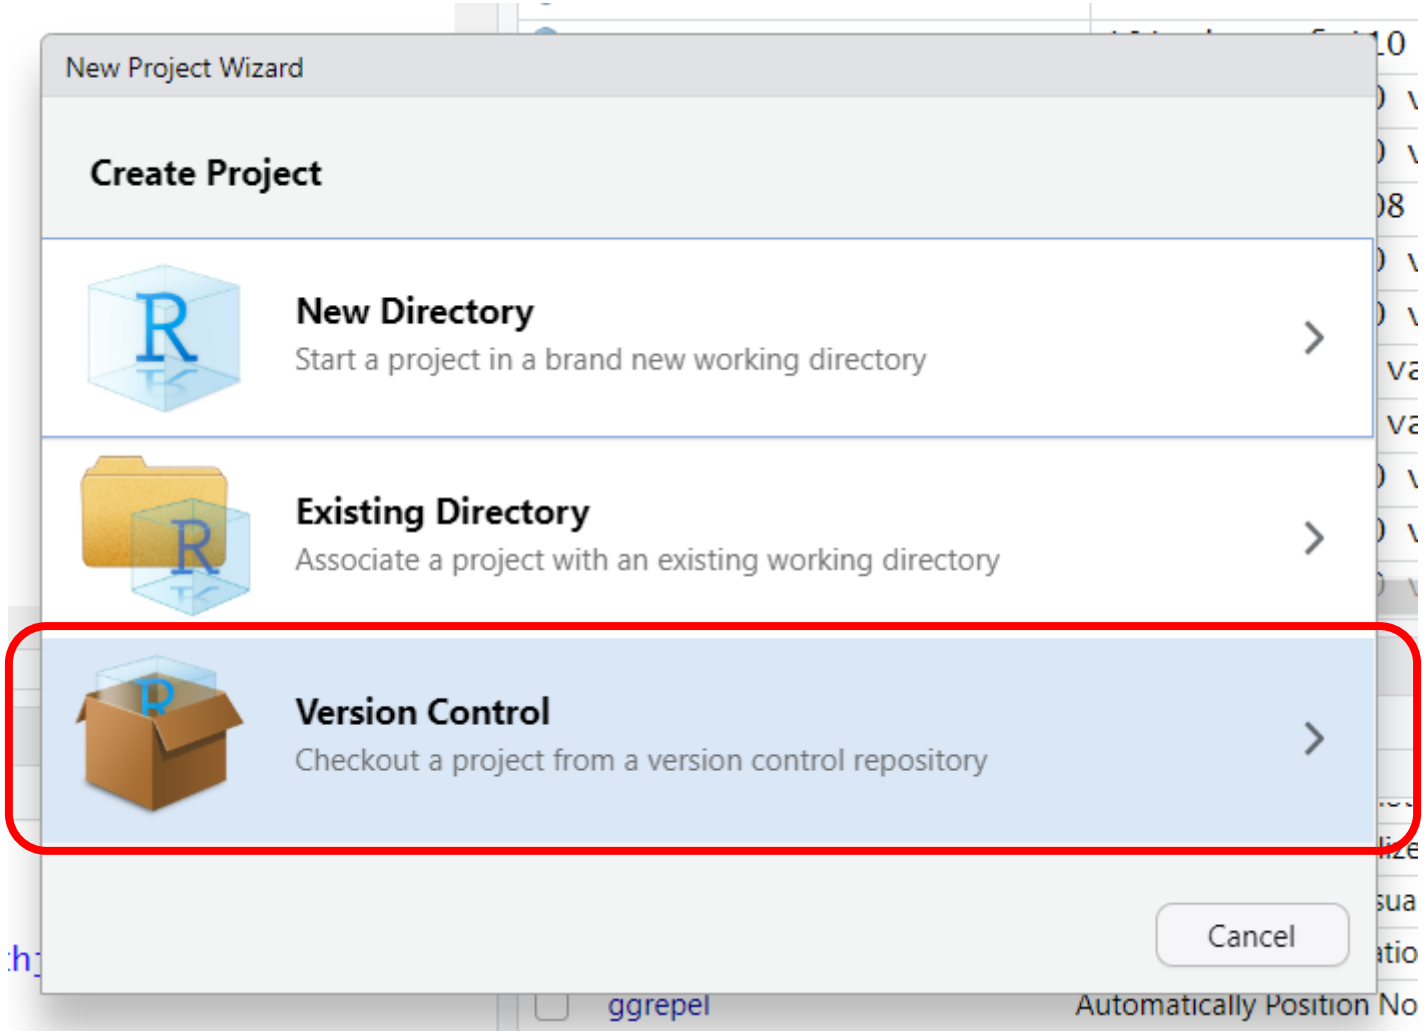
New Project Wizard
Create Project
New Directory
Start a project in a brand new working directory
Existing Directory
Associate a project with an existing working directory
Version Control
Checkout a project from a version control repository
Cancel
ggrepel
Automatically Position No

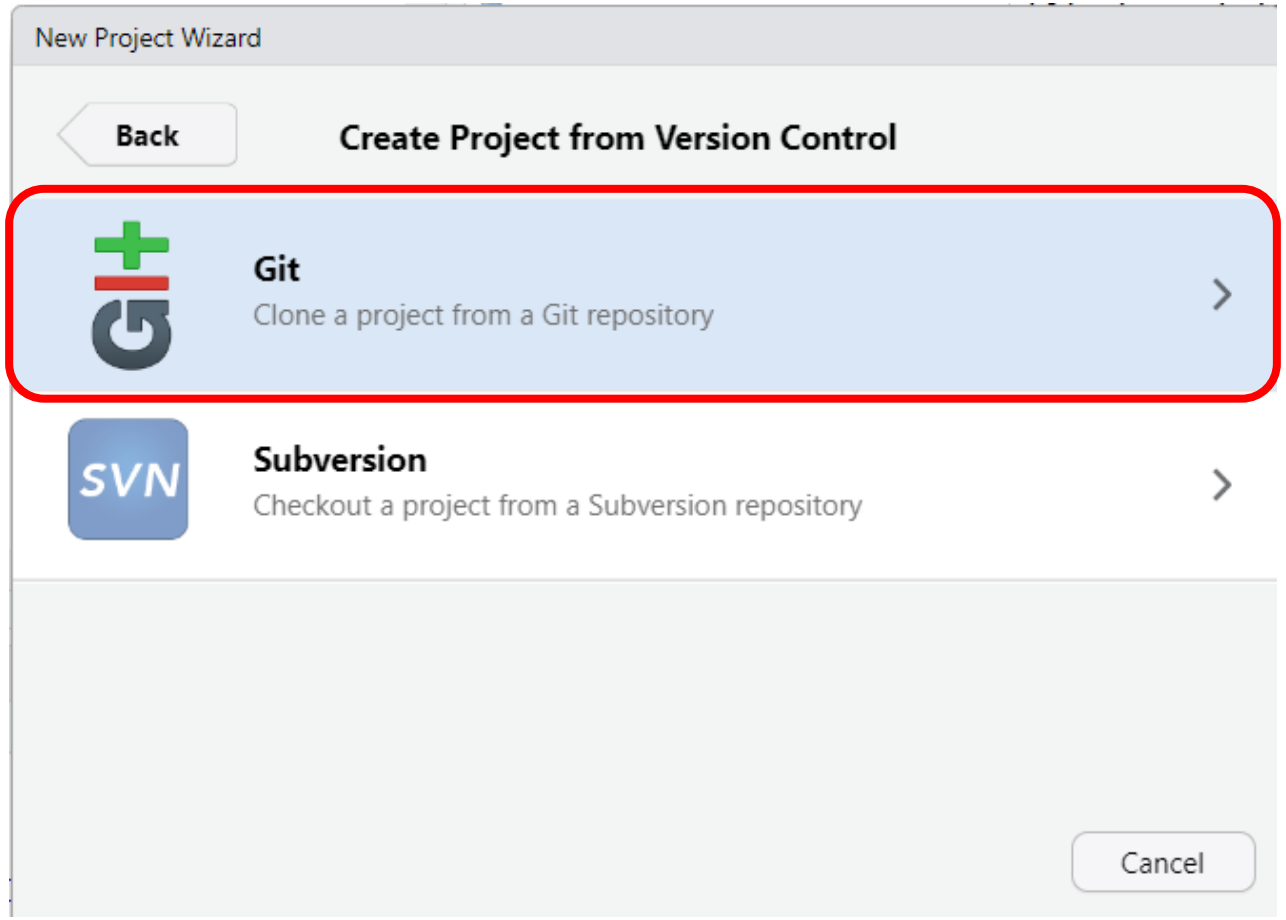
New Project Wizard
Back
Create Project from Version Control
Git
Clone a project from a Git repository
SVN
Subversion
Checkout a project from a Subversion repository
Cancel

New Project Wizard

Back

Clone Git Repository

Repository URL:

https://github.com/JAAubin/GitHub-Workshop

Project directory name:

GitHub-Workshop

Create project as subdirectory of:

~/Sync/Repositories

Browse...

Open in new session

Create Project

Cancel

GitHub-Workshop - main - RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function | Addins | GitHub-Workshop

Console | **Terminal** | **Background Jobs**

R 4.5.1 · ~/Sync/Repositories/GitHub-Workshop/

```
R version 4.5.1 (2025-06-13 ucrt) -- "Great Square Root"
Copyright (C) 2025 The R Foundation for Statistical Computing
Platform: x86_64-w64-mingw32/x64

R is free software and comes with ABSOLUTELY NO WARRANTY.
You are welcome to redistribute it under certain conditions.
Type 'license()' or 'licence()' for distribution details.

  Natural language support but running in an English locale

R is a collaborative project with many contributors.
Type 'contributors()' for more information and
'citation()' on how to cite R or R packages in publications.

Type 'demo()' for some demos, 'help()' for on-line help, or
'help.start()' for an HTML browser interface to help.
Type 'q()' to quit R.

>
```

Environment | **History** | **Connections** | **Git** | **Tutorial**

Diff | Commit | Pull | Push | History | More | New Branch | main

Staged	Status	Path
☐	? ?	GitHub-Workshop.Rproj

Files | **Plots** | **Packages** | **Help** | **Viewer** | **Presentation**

New Folder | New File | Delete | Rename | More

Home > Sync > Repositories > GitHub-Workshop

Name	Size	Modified
..		
.gitignore	720 B	Mar 11, 2026, 11:39 AM
GitHub-Workshop.Rproj	267 B	Mar 11, 2026, 11:39 AM

Check out your fancy new git pane!

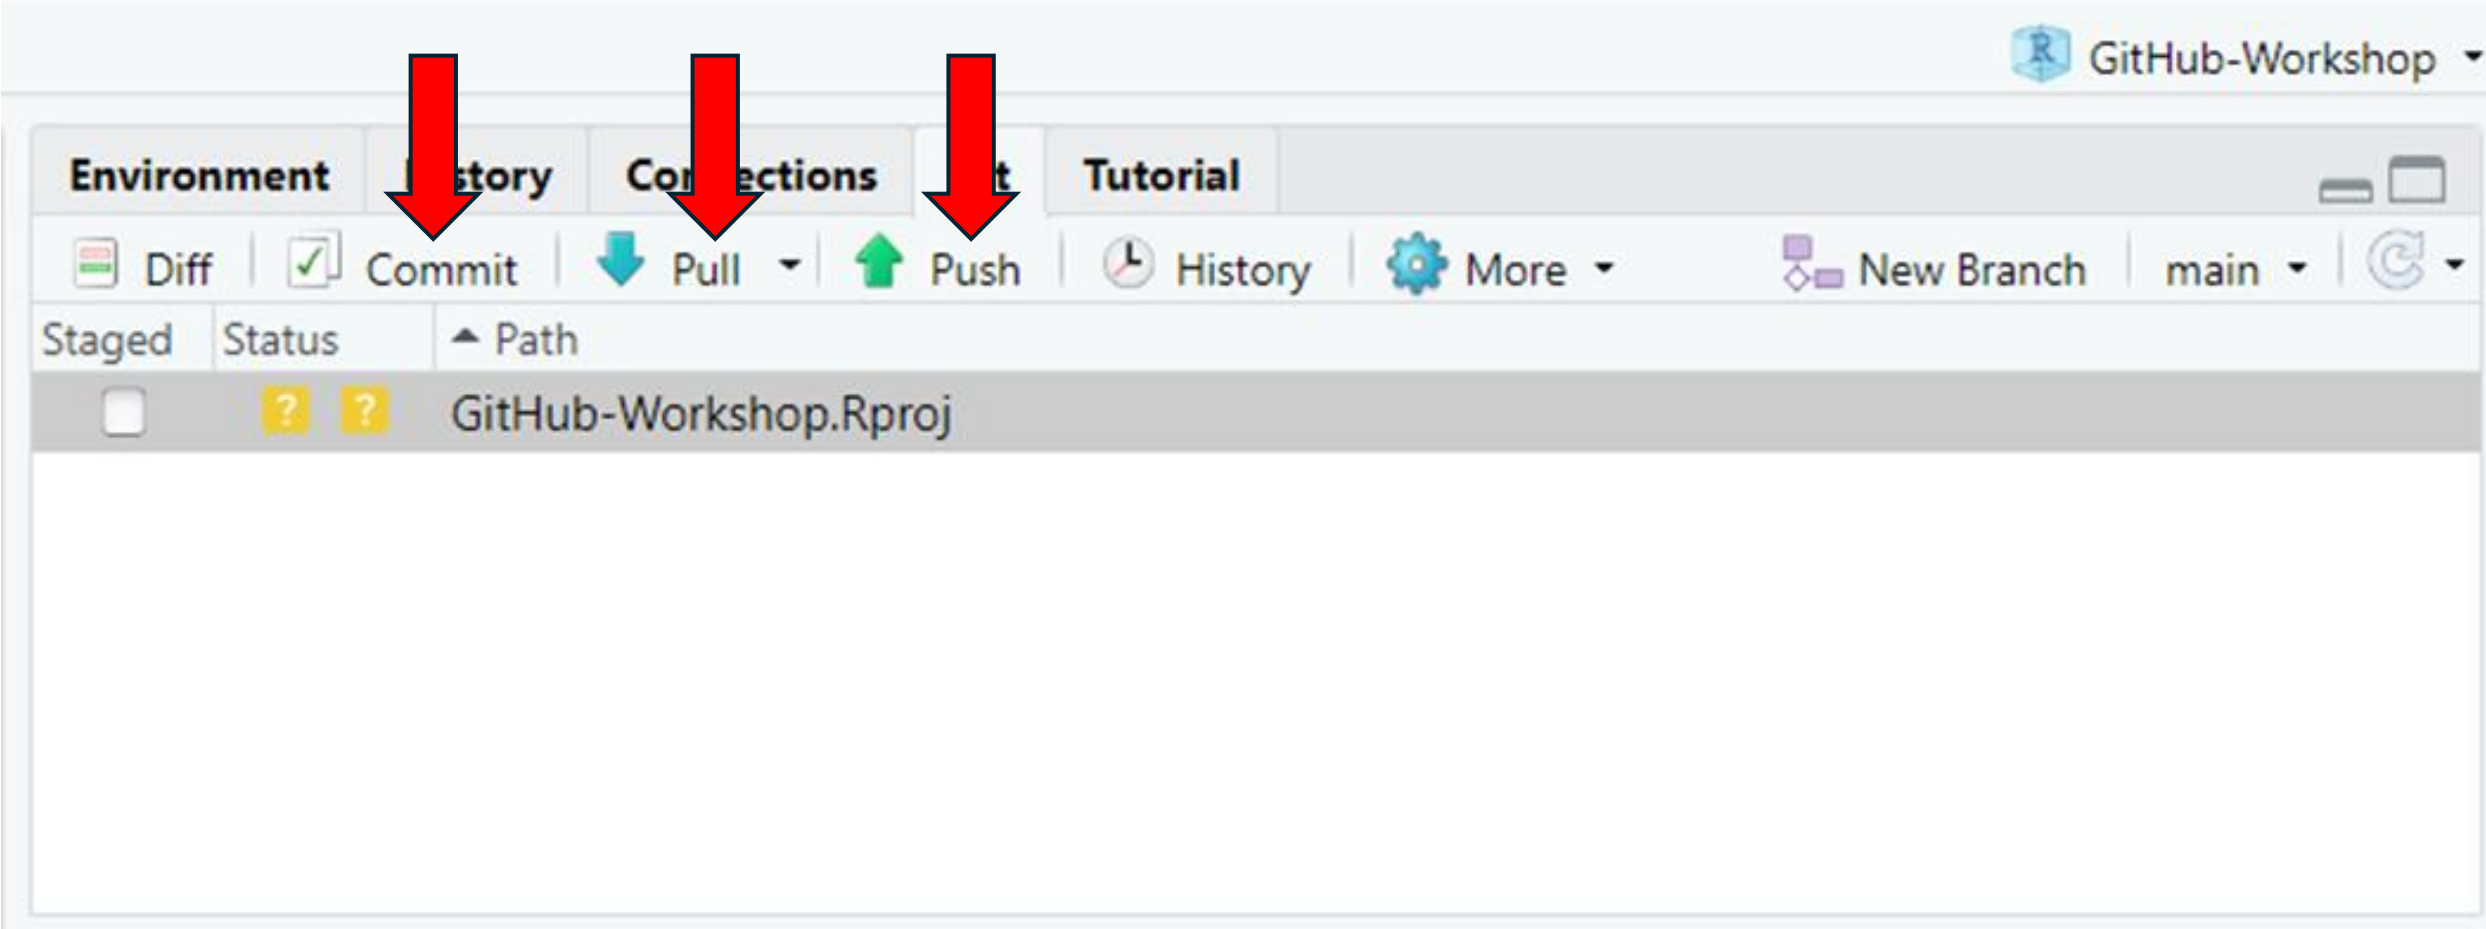

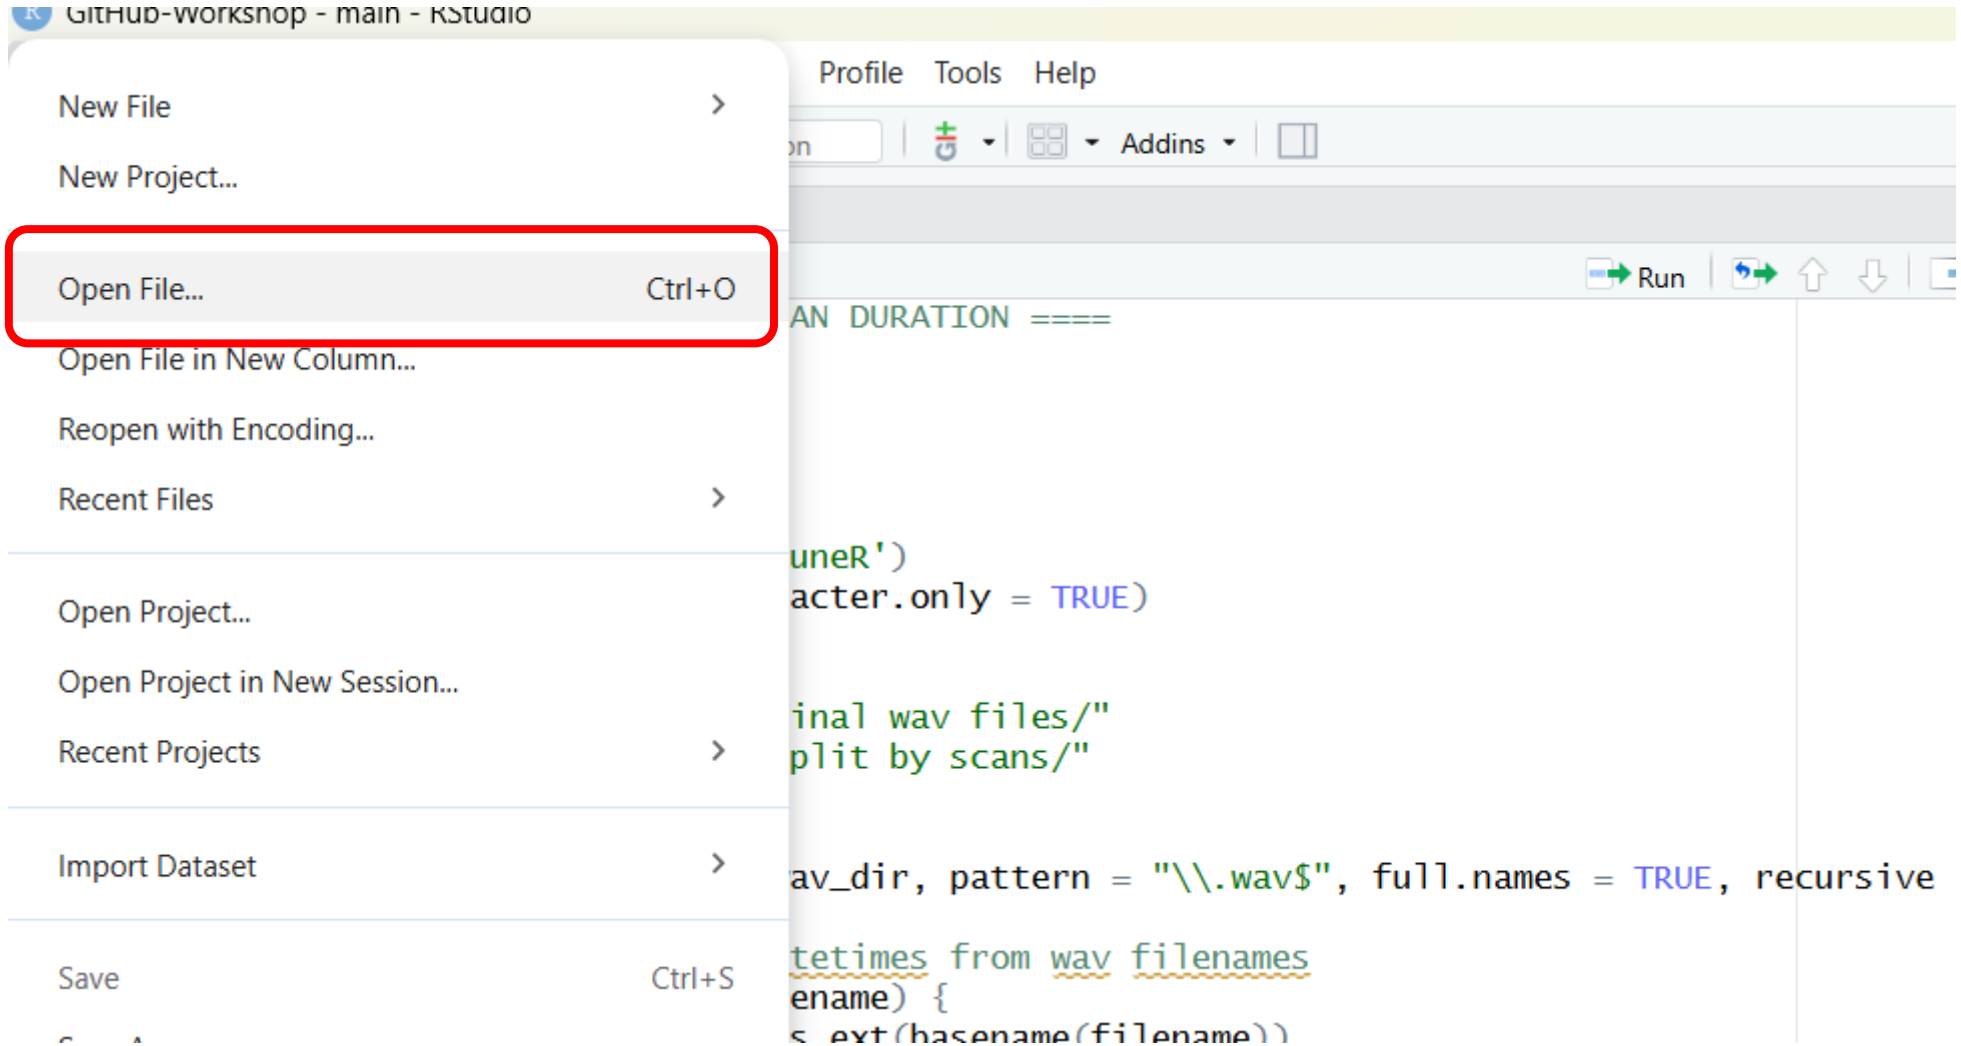
GitHub-Workshop - main - RStudio
Profile
Tools
Help
Addins
Run
New File
New Project...
Open File... Ctrl+O
Open File in New Column...
Reopen with Encoding...
Recent Files
Open Project...
Open Project in New Session...
Recent Projects
Import Dataset
Save Ctrl+S
AN DURATION ====
uneR')
acter.only = TRUE)
inal wav files/"
plit by scans/"
av_dir, pattern = "\\.wav$", full.names = TRUE, recursive
tetimes from wav filenames
ename) {

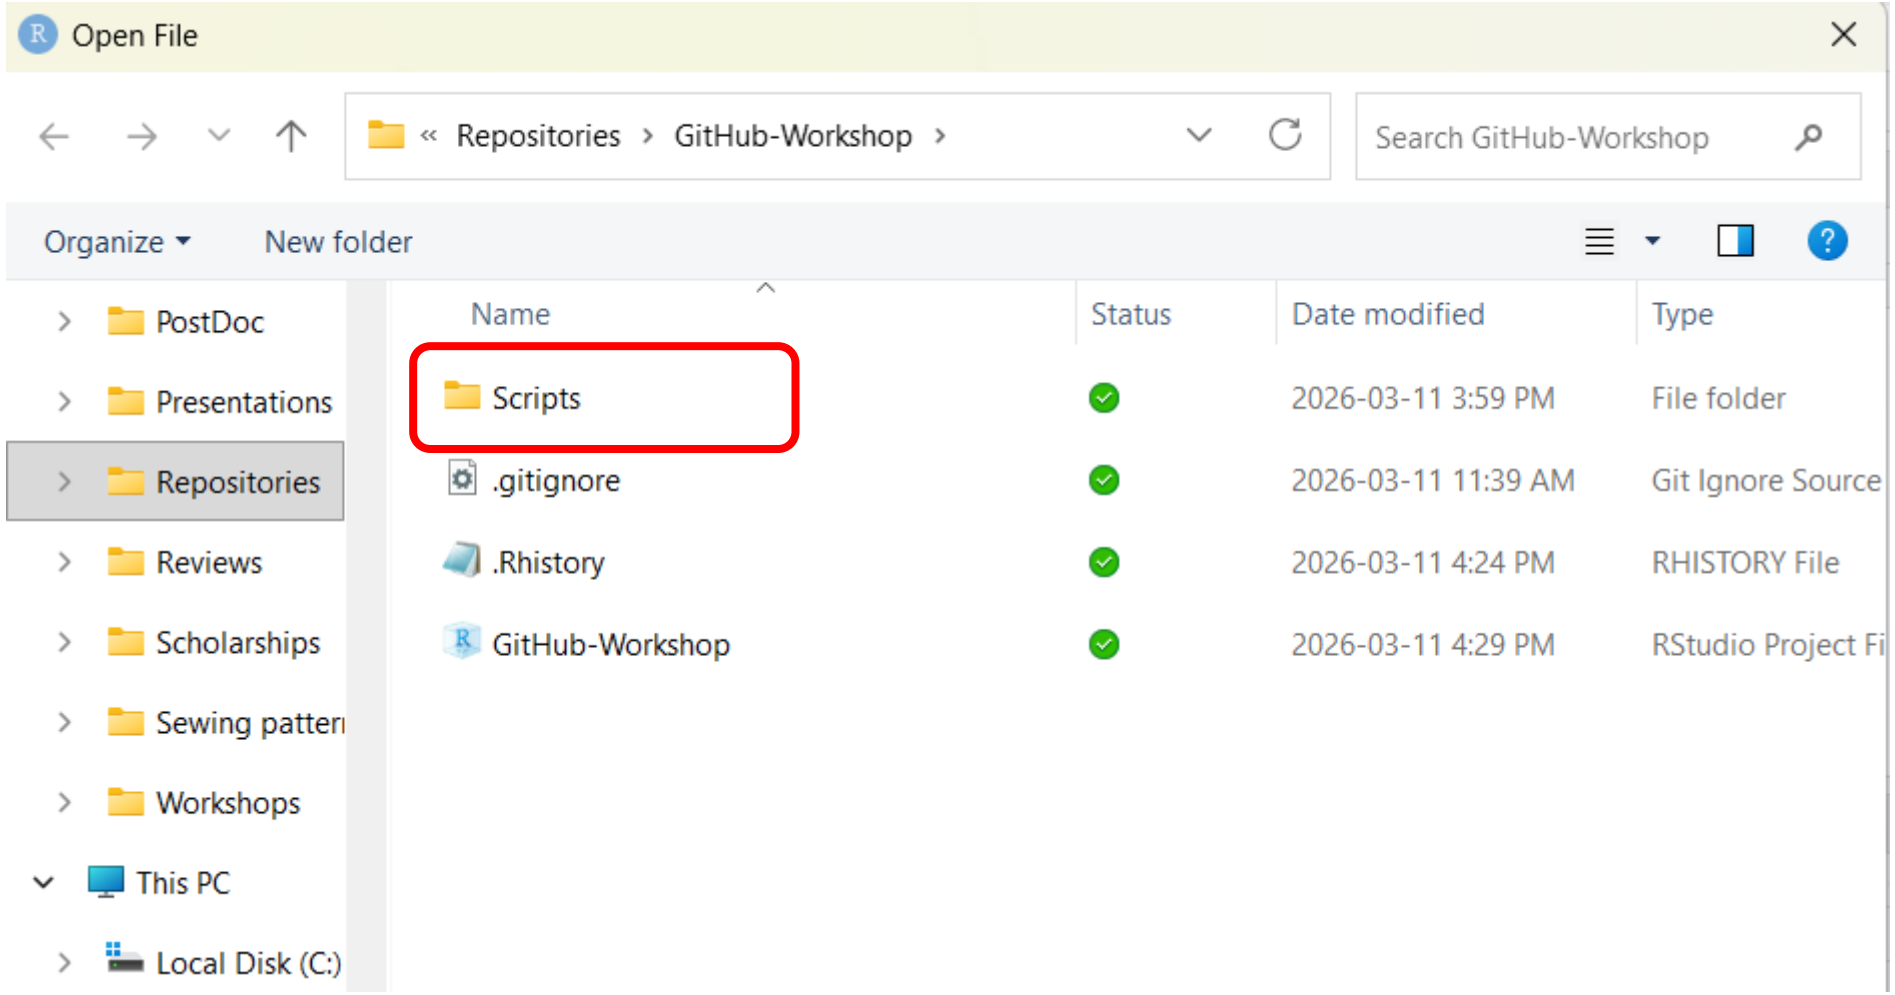
Open File
« Repositories › GitHub-Workshop ›
Search GitHub-Workshop
Organize
New folder
PostDoc
Presentations
Repositories
Reviews
Scholarships
Sewing patter
Workshops
This PC
Local Disk (C:)
Name
Status
Date modified
Type
Scripts
2026-03-11 3:59 PM
File folder
.gitignore
2026-03-11 11:39 AM
Git Ignore Source
.Rhistory
2026-03-11 4:24 PM
RHISTORY File
GitHub-Workshop
2026-03-11 4:29 PM
RStudio Project Fi

time for an
Exquisite Corpse