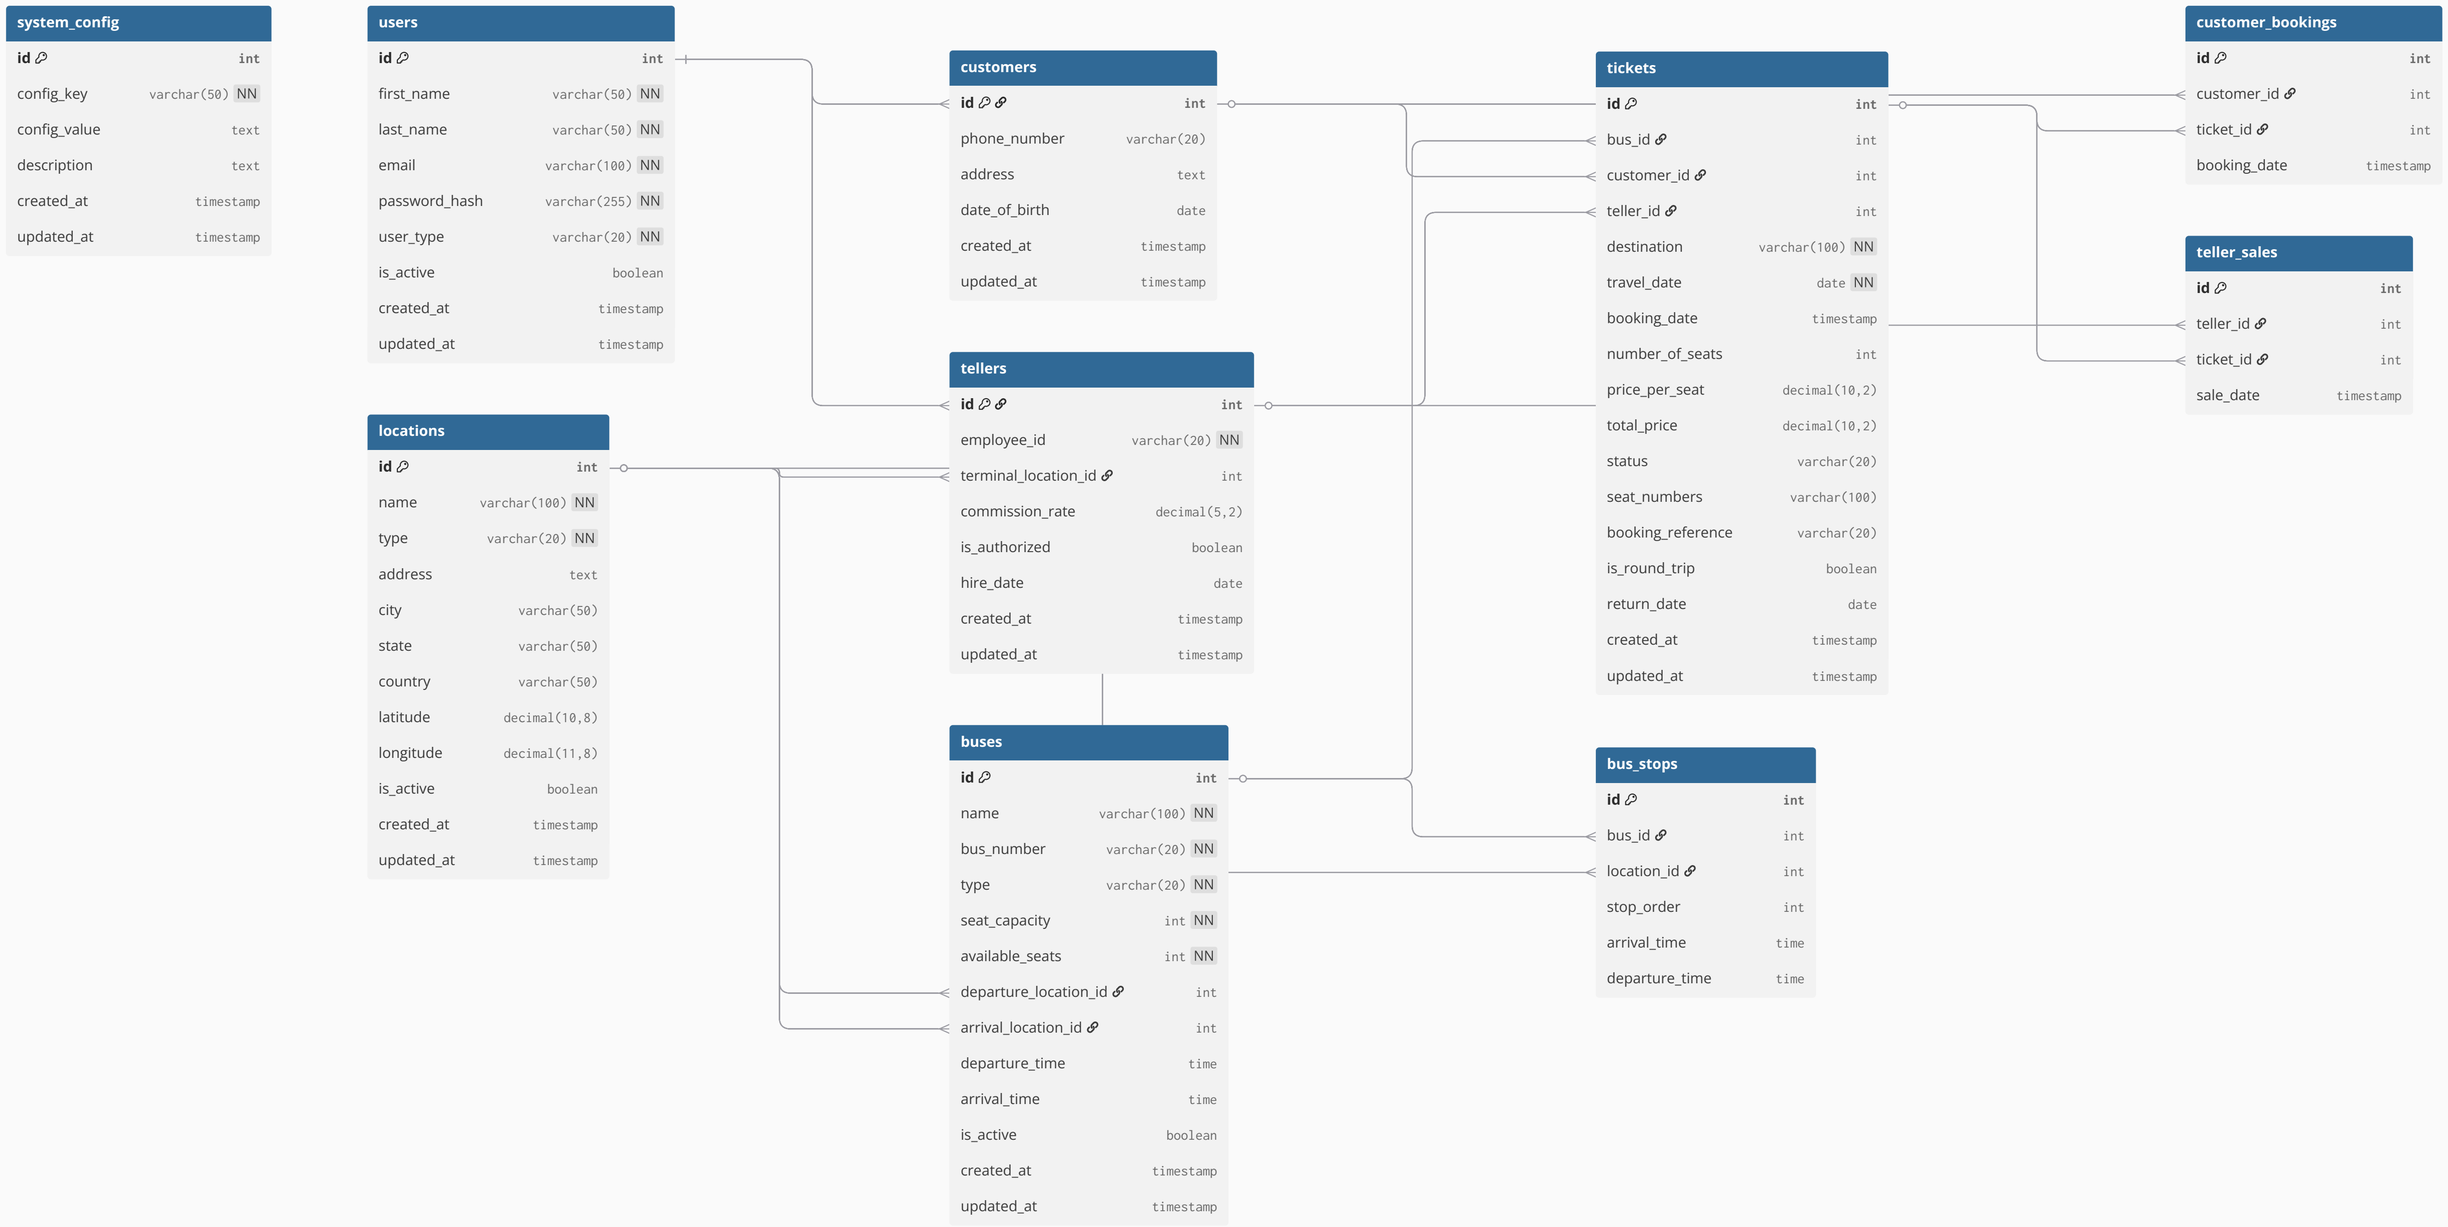
system_config
id int
config_key varchar(50) NN
config_value text
description text
created_at timestamp
updated_at timestamp
users
id int
first_name varchar(50) NN
last_name varchar(50) NN
email varchar(100) NN
password_hash varchar(255) NN
user_type varchar(20) NN
is_active boolean
created_at timestamp
updated_at timestamp
customers
id int
phone_number varchar(20)
address text
date_of_birth date
created_at timestamp
updated_at timestamp
tickets
id int
bus_id int
customer_id int
teller_id int
destination varchar(100) NN
travel_date date NN
booking_date timestamp
number_of_seats int
price_per_seat decimal(10,2)
total_price decimal(10,2)
status varchar(20)
seat_numbers varchar(100)
booking_reference varchar(20)
is_round_trip boolean
return_date date
created_at timestamp
updated_at timestamp
customer_bookings
id int
customer_id int
ticket_id int
booking_date timestamp
teller_sales
id int
teller_id int
ticket_id int
sale_date timestamp
tellers
id int
employee_id varchar(20) NN
terminal_location_id int
commission_rate decimal(5,2)
is_authorized boolean
hire_date date
created_at timestamp
updated_at timestamp
locations
id int
name varchar(100) NN
type varchar(20) NN
address text
city varchar(50)
state varchar(50)
country varchar(50)
latitude decimal(10,8)
longitude decimal(11,8)
is_active boolean
created_at timestamp
updated_at timestamp
buses
id int
name varchar(100) NN
bus_number varchar(20) NN
type varchar(20) NN
seat_capacity int NN
available_seats int NN
departure_location_id int
arrival_location_id int
departure_time time
arrival_time time
is_active boolean
created_at timestamp
updated_at timestamp
bus_stops
id int
bus_id int
location_id int
stop_order int
arrival_time time
departure_time time
dbdiagram.io

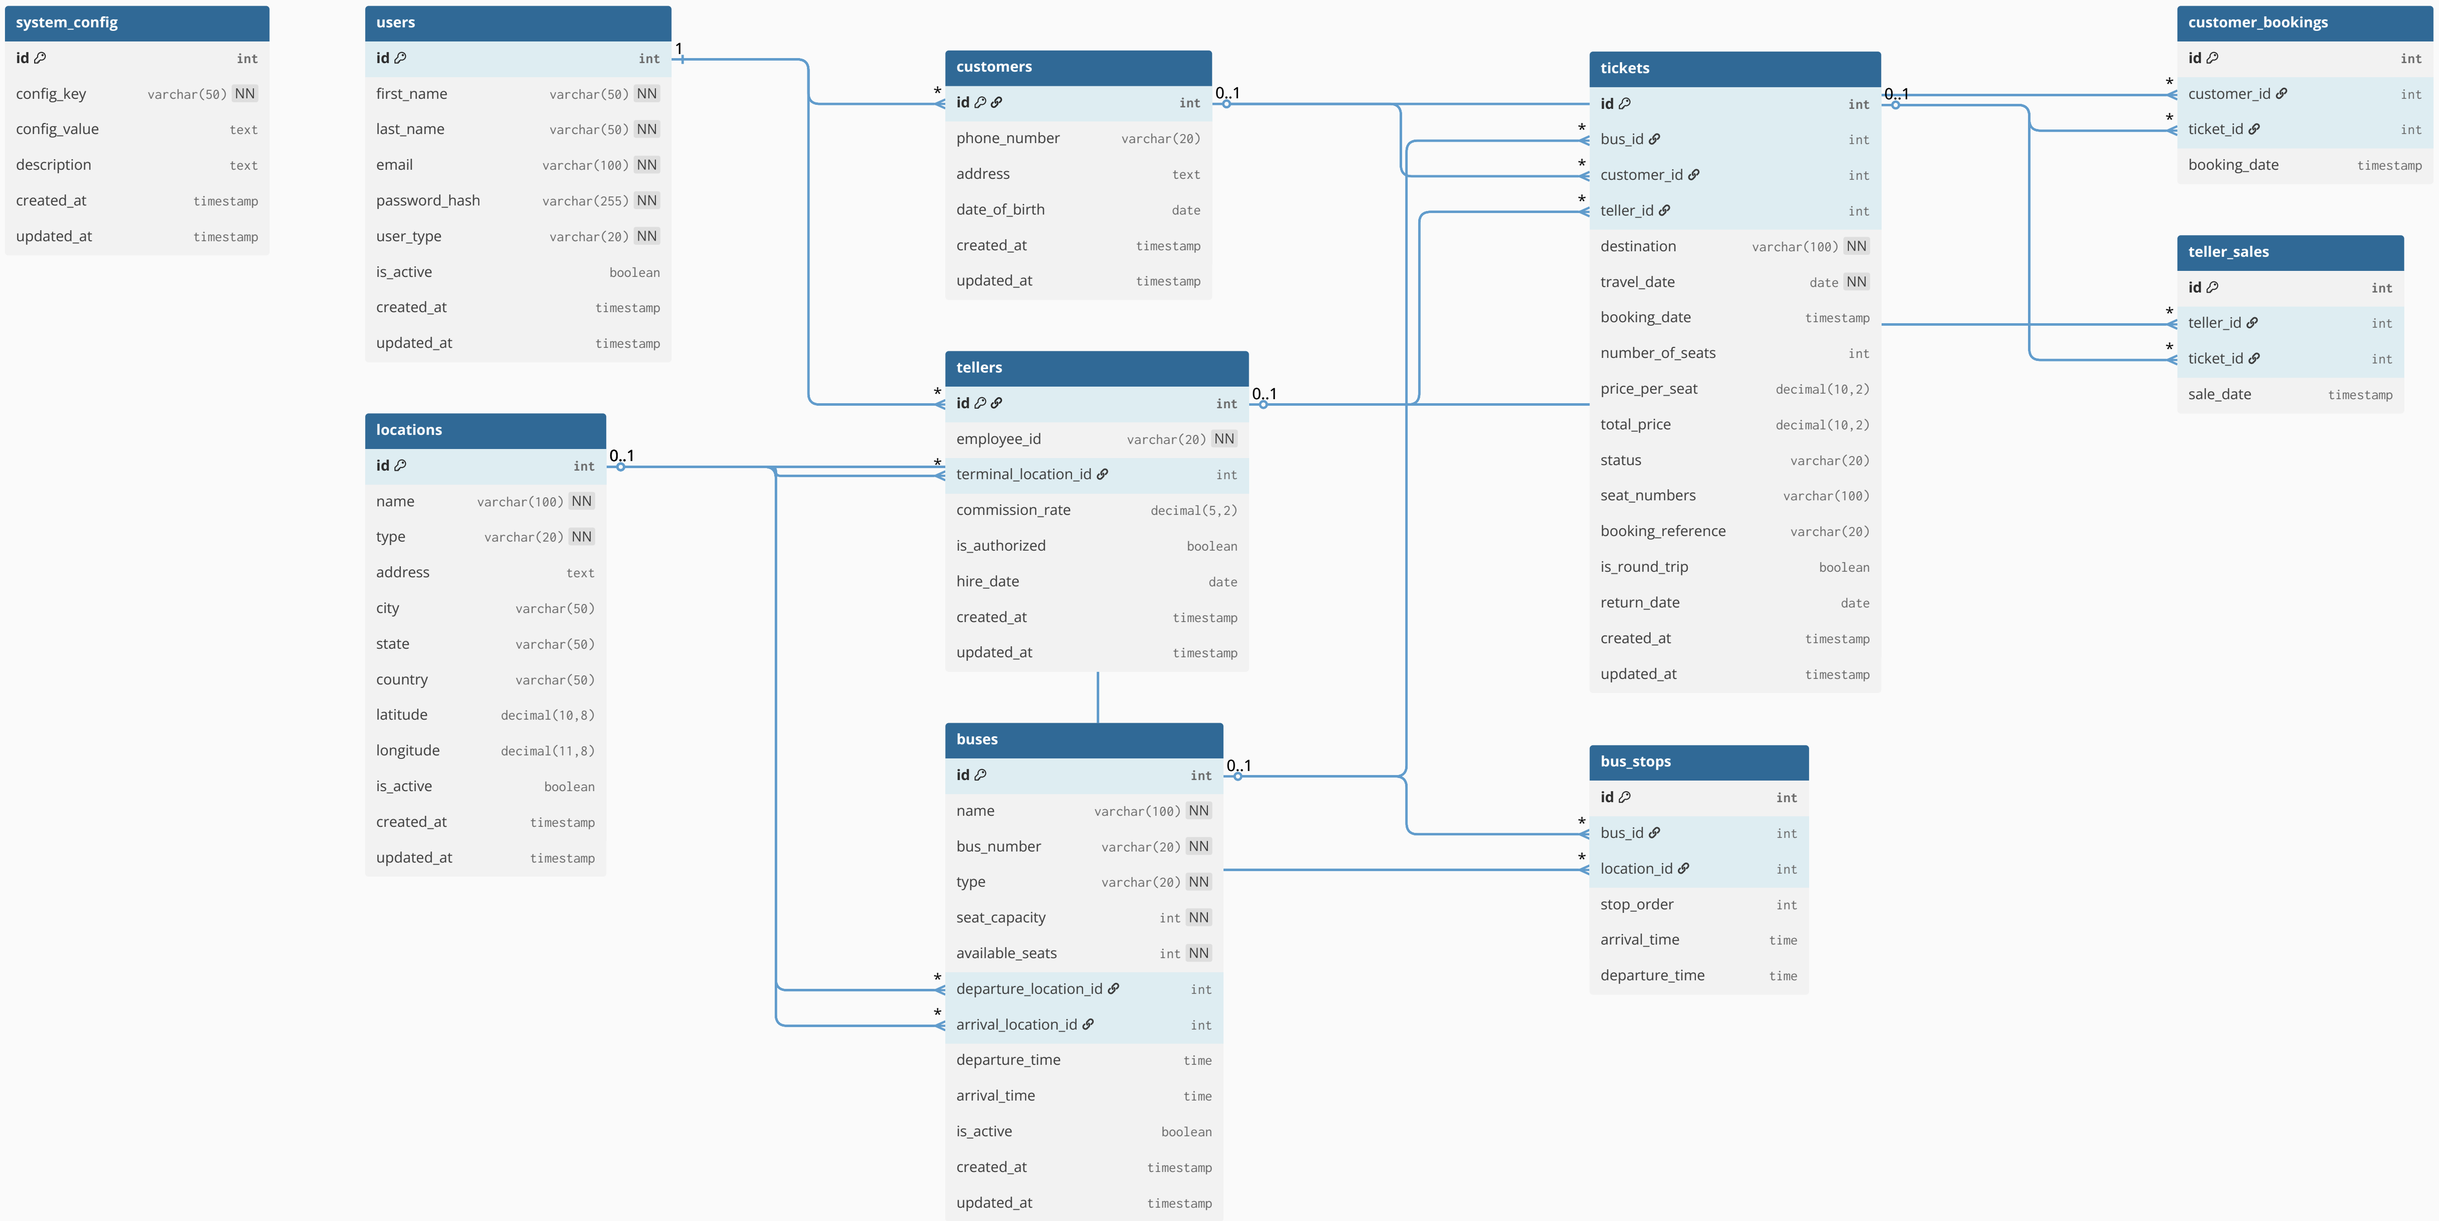
system_config
id int
config_key varchar(50) NN
config_value text
description text
created_at timestamp
updated_at timestamp
users
id int
first_name varchar(50) NN
last_name varchar(50) NN
email varchar(100) NN
password_hash varchar(255) NN
user_type varchar(20) NN
is_active boolean
created_at timestamp
updated_at timestamp
customers
id int
phone_number varchar(20)
address text
date_of_birth date
created_at timestamp
updated_at timestamp
tickets
id int
bus_id int
customer_id int
teller_id int
destination varchar(100) NN
travel_date date NN
booking_date timestamp
number_of_seats int
price_per_seat decimal(10,2)
total_price decimal(10,2)
status varchar(20)
seat_numbers varchar(100)
booking_reference varchar(20)
is_round_trip boolean
return_date date
created_at timestamp
updated_at timestamp
customer_bookings
id int
customer_id int
ticket_id int
booking_date timestamp
teller_sales
id int
teller_id int
ticket_id int
sale_date timestamp
tellers
id int
employee_id varchar(20) NN
terminal_location_id int
commission_rate decimal(5,2)
is_authorized boolean
hire_date date
created_at timestamp
updated_at timestamp
locations
id int
name varchar(100) NN
type varchar(20) NN
address text
city varchar(50)
state varchar(50)
country varchar(50)
latitude decimal(10,8)
longitude decimal(11,8)
is_active boolean
created_at timestamp
updated_at timestamp
buses
id int
name varchar(100) NN
bus_number varchar(20) NN
type varchar(20) NN
seat_capacity int NN
available_seats int NN
departure_location_id int
arrival_location_id int
departure_time time
arrival_time time
is_active boolean
created_at timestamp
updated_at timestamp
bus_stops
id int
bus_id int
location_id int
stop_order int
arrival_time time
departure_time time
1
0..1
*
dbdiagram.io