

EXPERIMENT – 2

PANDAS LIBRARY – BASIC CONCEPT

Aim:

To upload and analyze dataset given in csv format and perform data preprocessing and visualization



Procedure:


- Upload the csv file and read it
- Import the necessities like pandas ,numpy and seaborn
- Now visualize bar plot for sales over products , line plot for sales over time and correlation matrix

Program:

```
[ ] 9s
from google.colab import files
uploaded=files.upload()
import matplotlib.pyplot as plt
import pandas as pd
import numpy as np
file=next(iter(uploaded))
df=pd.read_csv(file)
print(df.head())
print(df.isnull().sum())
df['Sales'].fillna(df['Sales'].mean(),inplace=True)
df.dropna(subset=['Product','Quantity','Region'],inplace=True)
print(df.describe())
product=df.groupby('Product').agg({
    'Sales':'sum',
    'Quantity':'sum'
}).reset_index()
print(product)
plt.figure(figsize=(10,6))
plt.bar(product['Product'],product['Sales'])
plt.xlabel('Product')
plt.ylabel('Total Sales')
plt.title('Total Sales over product')
plt.show()
df['Date']=pd.to_datetime(df['Date'],errors='coerce')
sales=df.groupby(df['Date']).agg({'Sales':'sum'}).reset_index()
plt.figure(figsize=(10,6))
plt.plot(sales['Date'],sales['Sales'])
plt.xlabel('Date')
plt.ylabel('Sales')
plt.title("Total sales over date")
plt.show()
pivot=df.pivot_table(values='Sales',index='Region',columns='Product',aggfunc=np.sum,fill_value=0)
print(pivot)
co=df.select_dtypes(include=[np.number]).corr()
print(co)
import seaborn as sns
plt.figure(figsize=(8,6))
sns.heatmap(co,annot=True,cmap='coolwarm')
plt.title('Corelation matrix')
plt.show()
```

```
Choose Files No file chosen Upload widget is only available when the cell has been executed in the current browser session. Please rerun this cell to enable.
Saving sales_data - Sheet1.csv to sales_data - Sheet1 (16).csv
Date Product Sales Quantity Region
0 01-01-2023 Product A 200 4 North
1 02-01-2023 Product B 150 3 South
2 03-01-2023 Product A 220 5 North
3 04-01-2023 Product C 300 6 East
4 05-01-2023 Product B 180 4 West
Date
0
Product
0
Sales
0
Quantity
0
Region
0
dtype: int64
Sales Quantity
count 16.000000 16.000000
mean 237.500000 5.375000
std 64.031242 1.746425
min 150.000000 3.000000
25% 187.500000 4.000000
50% 225.000000 5.500000
75% 302.500000 7.000000
max 340.000000 8.000000
Product Sales Quantity
0 Product A 1350 33
1 Product B 850 17
2 Product C 1600 36
/tmp/ipython-input-1127875384.py:10: FutureWarning: A value is trying to be set on a copy of a DataFrame or Series through chained assignment using an i
The behavior will change in pandas 3.0. This inplace method will never work because the intermediate object on which we are setting values always behave
For example, when doing 'df[col].method(value, inplace=True)', try using 'df.method({col: value}, inplace=True)' or df[col] = df[col].method(value) inst
|< < 1/2 > >|
```

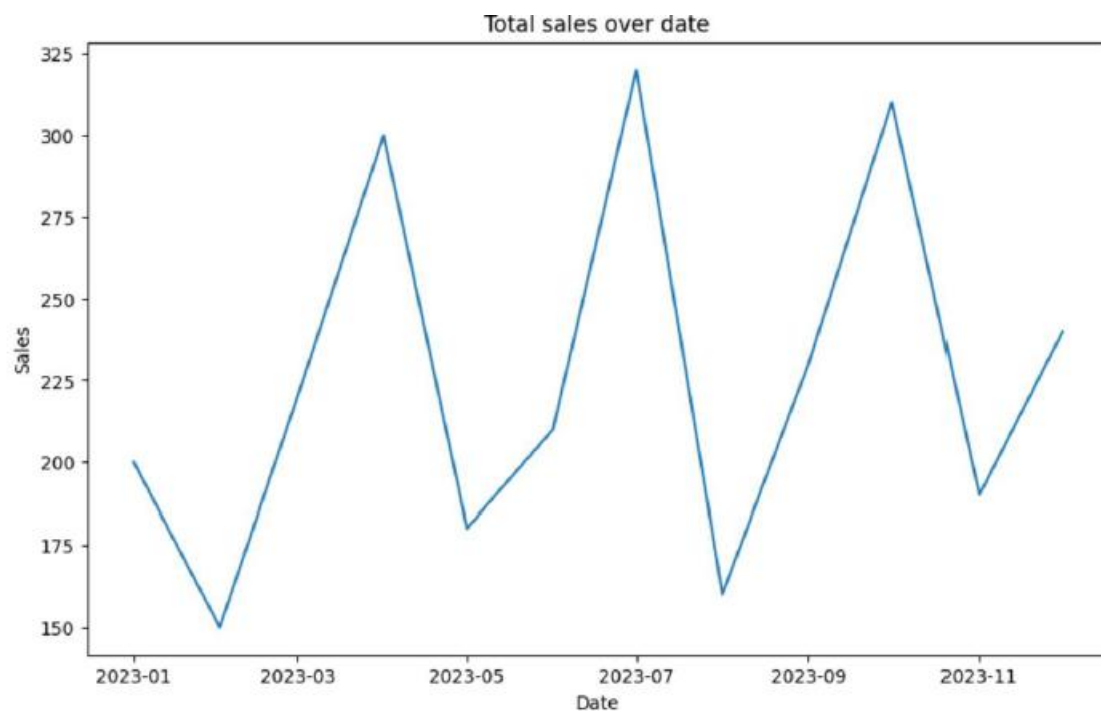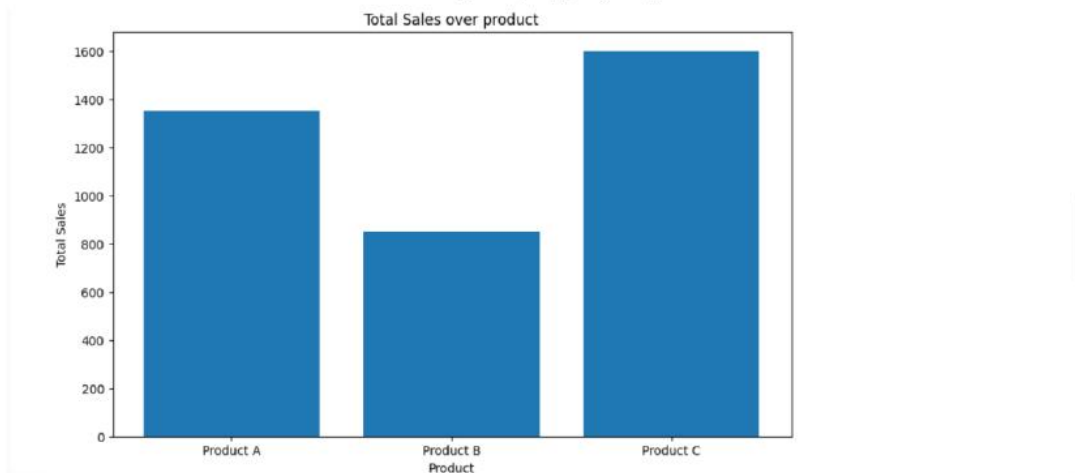

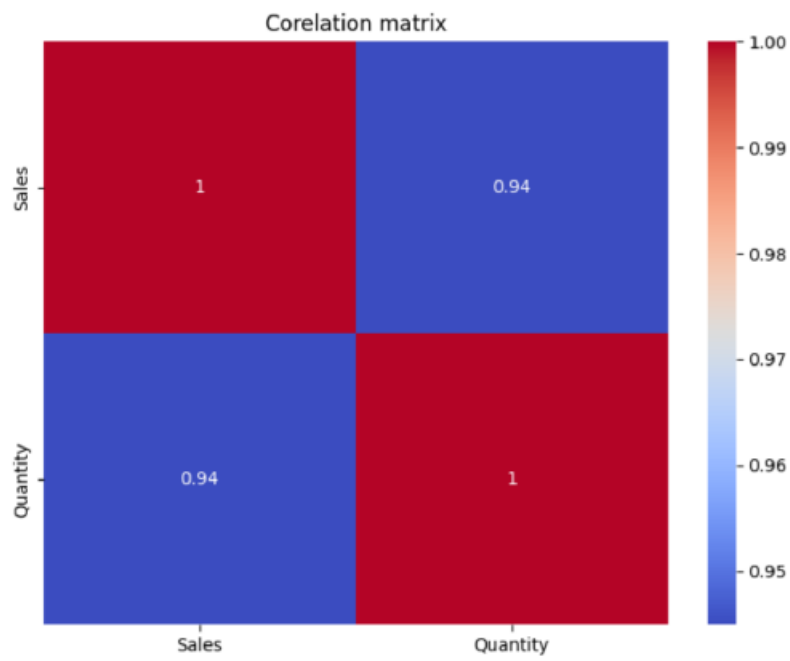

Result:

Thus the python program to analyze the given dataset and perform data processing is executed and verified