

EXPERIMENT – 4

DETECT OUTLIERS IN A GIVEN DATASET

Aim:

To detect outliers in a given dataset

Procedure:

- Import numpy and create an array with random integers
- Create a function for outlier
- Then plot it using seaborn with displot and distplot

Program:

```
[ ]  
✓ On 1 import numpy as np  
      array=np.random.randint(1,100,16)  
      array  
array([18, 38, 76, 45, 93, 92, 73, 13, 83, 97, 15, 1, 4, 62, 29, 41])
```

```
[ ]  
✓ On 2 array.mean()  
np.float64(48.75)
```

```
[ ]  
✓ On 3 np.percentile(array,25)  
np.float64(17.25)
```



```
[ ]  
✓ On 4 np.percentile(array,50)  
np.float64(43.0)
```

```
[ ]  
✓ On 5 np.percentile(array,75)  
np.float64(77.75)
```

```
[ ]  
✓ On 6 np.percentile(array,100)  
np.float64(97.0)
```

```
[ ]  
✓ 7 def outlierdetect(array):  
    sorted(array)  
    q1,q3=np.percentile(array,[25,75])  
    iqr=q3-q1  
    lr=q1-(1.5*iqr)  
    ur=q3+(1.5*iqr)  
    return lr,ur
```

```
[ ]  
✓ On 8 lr,ur=outlierdetect(array)  
    lr,ur  
(np.float64(-73.5), np.float64(168.5))
```

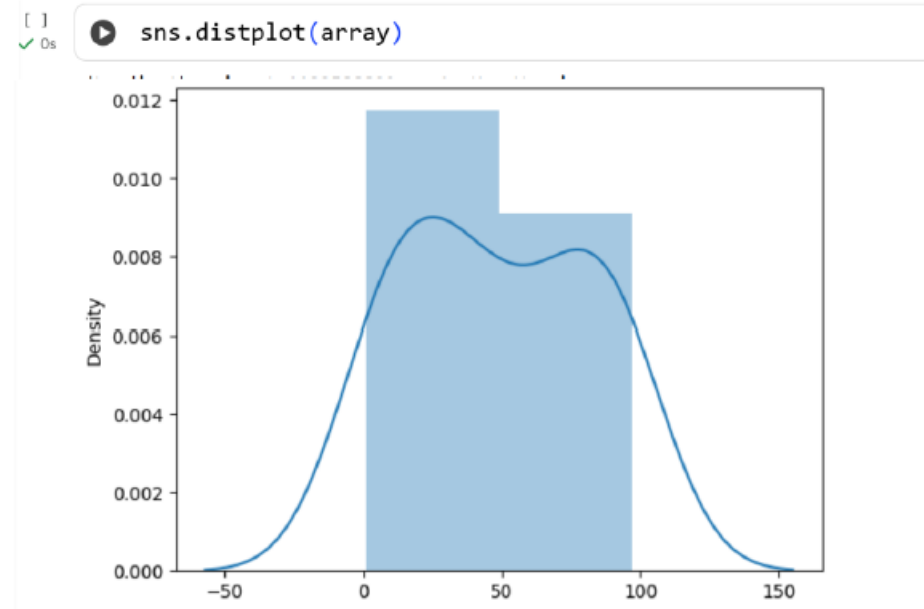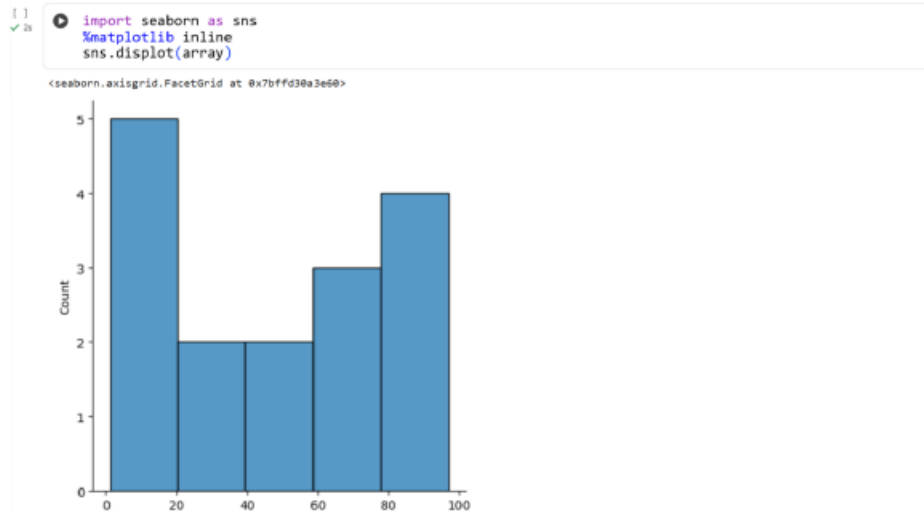

Result:

Thus the python program to detect outliers in a given dataset is executed and output verified successfully