Local rate bias changes with damage state

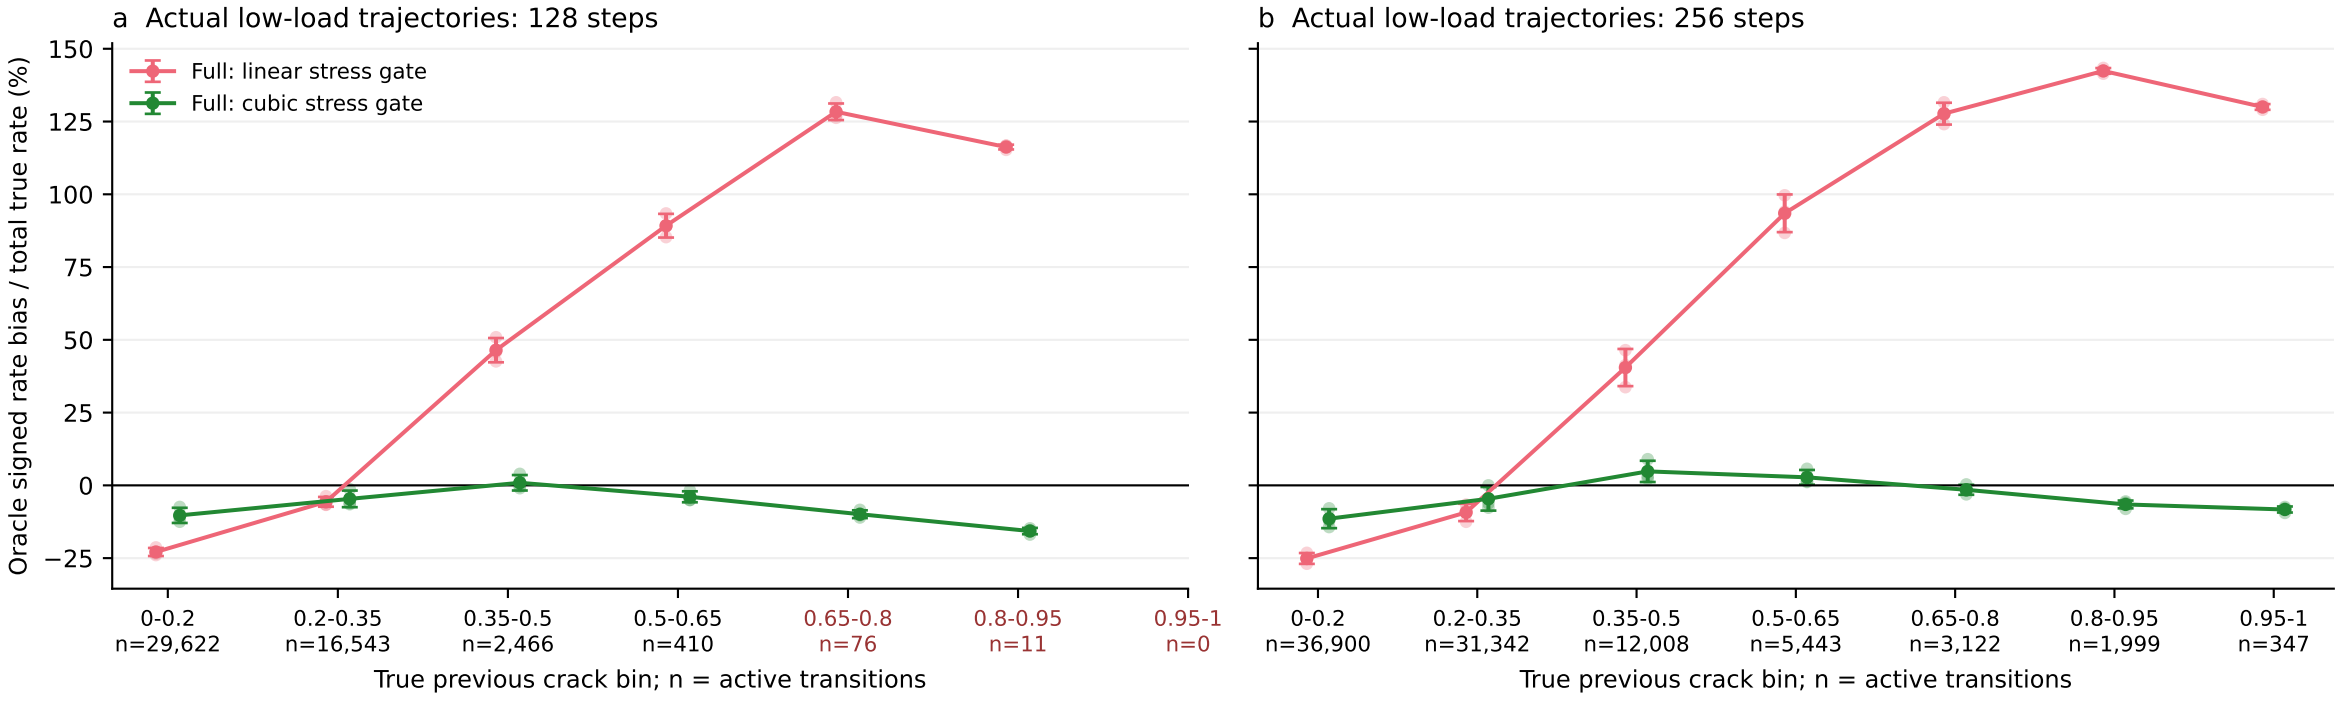

Oracle uses each test trajectory's true previous state for one step; normal rollouts receive no oracle states.
Lines and bars: mean +/- sample SD across 3 model seeds. Counts are shared data transitions, not independent seed replicates.
Active true pre-failure transitions only; relative bias = sum(rate error) / sum(true rate).
Red counts indicate fewer than 100 points; at 128 steps the final bin has no data and its rate is undefined.