


CVRP — published baselines

Test sets from Ma, Cao & Chee, *Learning to Search Feasible and Infeasible Regions of Routing Problems with Flexible Neural k -Opt*, NeurIPS 2023 (arXiv:2310.18264), tables 1 and 12. Gaps are relative to HGS, which serves as the reference. Times are the published ones, for the complete set.

Method	Type	Post	$N = 20$			$N = 50$			$N = 100$		
			Obj.	Gap (%)	Time	Obj.	Gap (%)	Time	Obj.	Gap (%)	Time
HGS [21]	H	–	6.130	–	10.7h	10.366	–	1.2d	15.563	–	2.5d
LKH-3 [20]	H	–	6.135	0.08	17.9h	10.375	0.09	2.8d	15.647	0.54	5.7d
NeuOpt-GIRE (D2A=1, T=1k)	L2S/RL	–	6.132	0.03	4m	10.430	0.61	12m	15.865	1.94	28m
NeuOpt-GIRE (D2A=1, T=5k)	L2S/RL	–	6.130	0.00	20m	10.382	0.16	59m	15.698	0.87	2.3h
NeuOpt-GIRE (D2A=1, T=10k)	L2S/RL	–	6.130	0.00	41m	10.375	0.08	2h	15.656	0.60	4.6h
NeuOpt-GIRE (D2A=5, T=6k)	L2S/RL	–	6.130	0.00	2.1h	10.369	0.03	5.9h	15.610	0.30	13.8h
NeuOpt-GIRE (D2A=5, T=20k)	L2S/RL	–	6.130	0.00	6.8h	10.367	0.01	19.7h	15.586	0.15	1.9d
NeuOpt-GIRE (D2A=5, T=40k)	L2S/RL	–	6.130	0.00	13.7h	10.367	0.01	1.6d	15.579	0.10	3.8d
Sym-NCO [13] (A=8, T=200)	L2C/RL	–	–	–	–	–	–	–	15.702	0.89	7.2h
POMO [4] (A=8, T=200)	L2C/RL	–	6.136	0.09	11m	10.397	0.30	1.4h	15.672	0.70	7.2h
POMO+EAS [5] (A=8, T=200)	L2C/RL	AS	6.132	0.04	38m	10.379	0.13	3.1h	15.610	0.30	16h
POMO+EAS+SGBS [34] (short)	L2C/RL	AS+BS	–	–	–	–	–	–	15.587	0.15	1d
POMO+EAS+SGBS [34] (long)	L2C/RL	AS+BS	–	–	–	–	–	–	15.579	0.10	4.1d

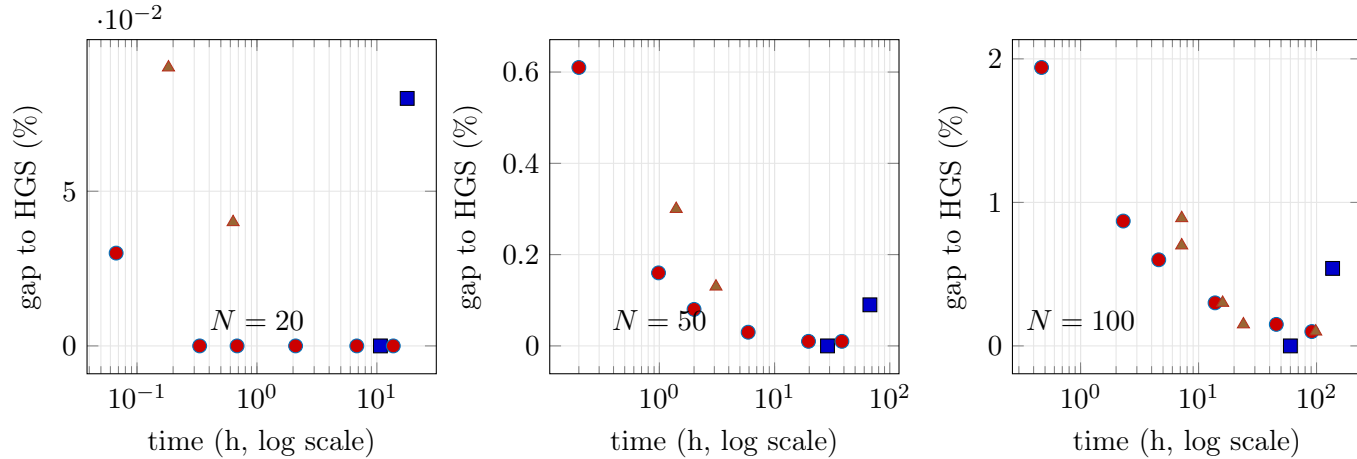

■ Classical (H) • Learn-to-search ▲ Learn-to-construct

13 methods. Bottom-left = better (fast and close to HGS). HGS sits at zero gap by construction; its cost is its computation time.