



training_data_chat.jsonl

```
{"messages":[{"role":"system","content":"You are an expert in generating Selenium Java page object classes using provided DOM information. Follow the framework's guidelines: use SeleniumBase wrapper methods, proper locators, and insert TODO comments if a mapping is missing. Make sure every page method includes comments in your generated code as the training examples may not have comments"}, {"role":"user","content":"Given the following DOM
```

```
structure:\n` `` html\n<input type=\"text\" class=\"inputBox\" name=\"companyName\" size=\"30\" maxlength=\"100\" id=\"createLeadForm_companyName\">\n<input type=\"text\" class=\"inputBox\" name=\"firstName\" size=\"30\" maxlength=\"100\" id=\"createLeadForm_firstName\">\n<input type=\"text\" class=\"inputBox\" name=\"lastName\" size=\"30\" maxlength=\"100\"
```

```
id=\"createLeadForm_lastName\">\n<input type=\"submit\" class=\"smallSubmit\" name=\"submitButton\" value=\"Create Lead\" id=\"ext-gen652\">\n` `` \nGenerate a Selenium Java page object class for this DOM.\"}, {"role":"assistant","content":"package
```

```
com.leaftaps.pages;\n\nimport com.framework.selenium.api.design.Locators;\nimport com.framework.testng.api.base.ProjectSpecificMethods;\n\n/**\n * Page object representing the Edit Lead page.\n * Provides methods to update lead details and submit changes.\n * @author Auto-generated\n */\npublic class EditLeadPage extends ProjectSpecificMethods {\n\n\t/**\n\t * Updates the company name in the Edit Lead form.\n\t * @param updcomnyName The new company name to enter\n\t * @return The current EditLeadPage instance\n\t */\n\tpublic EditLeadPage updateCompanyName(String updcomnyName)
```

```
{\n\t\tclearAndType(locateElement(Locators.ID,\"updateLeadForm_companyName\"), updcomnyName);\n\t\treportStep(updcomnyName + \"Updated company name is entered successfully \", \"pass\");\n\t\treturn this;\n\t}\n\n\t/**\n\t * Clicks the Update button to submit the changes.\n\t * @return A new ViewLeadPage instance\n\t */\n\tpublic ViewLeadPage clickUpdateSubmit()
```

```
{\n\t\tclick(locateElement(Locators.CLASS_NAME,\"smallSubmit\"));\n\t\treturn new ViewLeadPage();\n\t}\n\n}}}
```

```
{"messages":[{"role":"system","content":"You are an expert in generating Selenium Java page object classes using provided DOM information. Follow the framework's guidelines: use SeleniumBase wrapper methods, proper locators, and insert TODO comments if a mapping is missing. Make sure every page method includes comments in your generated code as the training examples may not have comments"}, {"role":"user","content":"Given the following DOM
```

```
structure:\n` `` html\n<input type=\"text\" size=\"20\" autocomplete=\"off\" id=\"ext-gen246\" name=\"id\" class=\" x-form-text x-form-field \" style=\"width: 214px;\">
```

```

<input type="text" size="20" autocomplete="off" id="ext-gen248"
name="firstName" class="x-form-text x-form-field" style="width: 214px;">
<input type="text" size="20" autocomplete="off" id="ext-gen250"
name="lastName" class="x-form-text x-form-field" style="width: 214px;">
<input type="text" size="20" autocomplete="off" id="ext-gen252"
name="companyName" class="x-form-text x-form-field" style="width: 214px;">
<button class="x-btn-text" type="button" id="ext-gen334">Find
Leads</button>
Generate a Selenium Java page object class for this
DOM.},{ "role": "assistant", "content": "package com.leafyaps.pages;

import
com.framework.selenium.api.design.Locators;
import
com.framework.testng.api.base.ProjectSpecificMethods;

/**
 * Page object
 * representing the Find Lead page.
 * Provides methods to search for leads and interact
 * with search results.
 * @author Auto-generated
 */
public class FindLeadPage
extends ProjectSpecificMethods {

    /**
     * Enters the first name in the Find Lead
     * form.
     * @param findfirstname The first name to search for
     * @return The current
     * FindLeadPage instance
     */
    public FindLeadPage enterLeadName(String
    findfirstname)
    {
        clearAndType(locateElement(Locators.XPATH,
        "//input[@name='firstName']")[3],
        findfirstname);
        reportStep(findfirstname + " first name is entered successfully",
        "pass");
        return this;
    }

    /**
     * Enters the lead ID in the Find Lead form.
     * @param id The lead ID to search for
     * @return The current FindLeadPage
     * instance
     */
    public FindLeadPage enterLeadID(String id)
    {
        clearAndType(locateElement(Locators.NAME,
        "id"), id);
        reportStep(id + "
        first name is entered successfully", "pass");
        return this;
    }

    /**
     * Clicks
     * the Find Leads button to perform the search.
     * @return The current FindLeadPage
     * instance
     */
    public FindLeadPage clickFindleadsButton()
    {
        click(locateElement(Locators.XPATH,
        "//button[text()='Find
        Leads']"));
        reportStep("FindLeads Button is clicked",
        "pass");
        return
        this;
    }
}

```

{"messages": [{"role": "system", "content": "You are an expert in generating Selenium Java page object classes using provided DOM information. Follow the framework's guidelines: use SeleniumBase wrapper methods, proper locators, and insert TODO comments if a mapping is missing. Make sure every page method includes comments in your generated code as the training examples may not have

comments"}, {"role": "user", "content": "Given the following DOM

```

structure:
<html>
<input type="text" size="20" autocomplete="off" id="ext-
gen253" name="id" class="x-form-text x-form-field" style="width:
214px;">
<input type="text" size="20" autocomplete="off" id="ext-gen255"
name="firstName" class="x-form-text x-form-field" style="width:
214px;">
<input type="text" size="20" autocomplete="off" id="ext-gen253"

```

```

name=\"id\" class=\" x-form-text x-form-field\" style=\"width: 214px;\">\r\n<input
type=\"text\" size=\"20\" autocomplete=\"off\" id=\"ext-gen253\" name=\"id\" class=\" x-
form-text x-form-field\" style=\"width: 214px;\">\r\n<button class=\"x-btn-text\"
type=\"button\" id=\"ext-gen341\">Find Leads</button>\n` ``\nGenerate a Selenium
Java page object class for this DOM.\"},{\"role\":\"assistant\",\"content\":\"package
com.leafaptaps.pages;\r\n\r\nimport
com.framework.selenium.api.design.Locators;\r\nimport
com.framework.testng.api.base.ProjectSpecificMethods;\r\n\r\n\r\n/**\r\n * Page
object representing the Find Lead page.\r\n * Provides methods to search for leads and
interact with search results.\r\n * @author Auto-generated\r\n */\r\npublic class
FindLeadPage extends ProjectSpecificMethods {\r\n\r\n\t/**\r\n\t * Enters the first
name in the Find Lead form.\r\n\t * @param findfirstname The first name to search
for\r\n\t * @return The current FindLeadPage instance\r\n\t */\r\n\tpublic FindLeadPage
enterLeadName(String findfirstname)
{\r\n\t\t\tclearAndType(locateElement(Locators.XPATH,\"(//input[@name='firstName'])[3]
\"), findfirstname);\r\n\t\t\treportStep(findfirstname + \" first name is entered
successfully\", \"pass\");\r\n\t\t\treturn this;\r\n\t}\r\n\r\n\t/**\r\n\t * Enters the lead ID in
the Find Lead form.\r\n\t * @param id The lead ID to search for\r\n\t * @return The
current FindLeadPage instance\r\n\t */\r\n\tpublic FindLeadPage enterLeadID(String id)
{\r\n\t\t\tclearAndType(locateElement(Locators.NAME,\"id\"), id);\r\n\t\t\treportStep(id + \"
first name is entered successfully\", \"pass\");\r\n\t\t\treturn this;\r\n\t}\r\n\r\n\t/**\r\n\t *
Clicks the Find Leads button to perform the search.\r\n\t * @return The current
FindLeadPage instance\r\n\t */\r\n\tpublic FindLeadPage clickFindleadsButton()
{\r\n\t\t\tclick(locateElement(Locators.XPATH,\"//button[text()='Find
Leads']\"));\r\n\t\t\treportStep(\"FindLeads Button is clicked\", \"pass\");\r\n\t\t\treturn
this;\r\n\t}\r\n\t}}

```

```

{"messages":[{"role":"system","content":"You are an expert in generating Selenium Java
page object classes using provided DOM information. Follow the framework's
guidelines: use SeleniumBase wrapper methods, proper locators, and insert TODO
comments if a mapping is missing. Make sure every page method includes comments in
your generated code as the training examples may not have
comments"}, {"role":"user","content":"Given the following DOM structure:\n` `` `html\n<a
style=\"color: black;\"
href=\"/crmsfa/control/main?externalLoginKey=EL601288709152\">\nCRM/SFA\n</a>\n
<input class=\"decorativeSubmit\" style=\"width:65px; margin-left:1px;\"
type=\"submit\" value=\"Logout\">\n` `` ` \nGenerate a Selenium Java page object class
for this DOM.\"},{\"role\":\"assistant\",\"content\":\"/**\r\n * Page object representing the Home
page after login.\r\n * Provides methods to verify the home page and navigate to other
pages.\r\n * @author Auto-generated\r\n */\r\npackage com.leafaptaps.pages;\r\n\r\nimport
com.framework.selenium.api.design.Locators;\r\nimport

```

```

com.framework.testng.api.base.ProjectSpecificMethods;\n\n\npublic class HomePage
extends ProjectSpecificMethods {\n\n\t/**\n\t * Verifies that the Home page is
displayed.\n\t * @return The current HomePage instance\n\t */\n\tpublic HomePage
verifyHomePage() {\n\t\tverifyDisplayed(locateElement(Locators.LINK_TEXT,
"CRM/SFA")); \n\t\treportStep("Homepage is loaded", "pass"); \n\t\treturn
this; \n\t}\n\n\t/**\n\t * Clicks the CRM/SFA link to navigate to MyHomePage.\n\t *
@return A new MyHomePage instance\n\t */\n\tpublic MyHomePage clickCrmsfaLink()
{\n\t\tclick(locateElement(Locators.LINK_TEXT,
"CRM/SFA")); \n\t\treportStep("CRM/SFA link is clicked", "pass"); \n\t\treturn new
MyHomePage(); \n\t}\n\n\t/**\n\t * Clicks the Logout button to log out of the
application.\n\t * @return A new LoginPage instance\n\t */\n\tpublic LoginPage
clickLogOut() {\n\t\tclick(locateElement(Locators.CLASS_NAME,
"decorativeSubmit")); \n\t\treportStep("Logout button is clicked",
"pass"); \n\t\treturn new LoginPage(); \n\t}\n\n}}

```

```

{"messages":[{"role":"system","content":"You are an expert in generating Selenium Java
page object classes using provided DOM information. Follow the framework's
guidelines: use SeleniumBase wrapper methods, proper locators, and insert TODO
comments if a mapping is missing. Make sure every page method includes comments in
your generated code as the training examples may not have
comments"}, {"role":"user","content":"Given the following DOM
structure:\n` ` ` html\n<input class=\"inputLogin\" type=\"text\" id=\"username\"
name=\"USERNAME\" size=\"50\">\n<input class=\"inputLogin\" type=\"password\"
id=\"password\" name=\"PASSWORD\" size=\"50\">\n<input
class=\"decorativeSubmit\" type=\"submit\" value=\"Login\">\n` ` ` \nGenerate a
Selenium Java page object class for this DOM."}, {"role":"assistant","content":
"/**\n *
Page object representing the Login page.\n * Provides methods to interact with the login
form fields and actions.\n * @author Auto-generated\n */\npackage
com.leaftaps.pages;\n\nimport com.framework.selenium.api.design.Locators;\nimport
com.framework.testng.api.base.ProjectSpecificMethods;\n\n\npublic class LoginPage
extends ProjectSpecificMethods {\n\n\t/**\n\t * Enters the username in the login
form.\n\t * @param uName The username to enter\n\t * @return The current LoginPage
instance\n\t */\n\tpublic LoginPage enterUsername(String uName)
{\n\t\tclearAndType(locateElement(Locators.ID,\"username\"),uName); \n\t\treportStep(
uName+\" username is entered successfully\", \"pass\"); \n\t\treturn
this; \n\t}\n\n\t/**\n\t * Enters the password in the login form.\n\t * @param passWord
The password to enter\n\t * @return The current LoginPage instance\n\t */\n\tpublic
LoginPage enterPassword(String passWord)
{\n\t\tclearAndType(locateElement(Locators.ID,\"password\"),passWord); \n\t\treportSt
ep(passWord+\" password is entered successfully\", \"pass\"); \n\t\treturn
this; \n\t}\n\n\t/**\n\t * Clicks the Login button to submit the form.\n\t * @return A new

```

```
HomePage instance\n\t */\n\tpublic HomePage clickLogin()
{\n\t\tclick(locateElement(Locators.CLASS_NAME,
\"decorativeSubmit\"));\n\t\treportStep(\"Login button is clicked successfully\",
\"pass\");\n\t\treturn new HomePage();\n\t}\n\n}}}
```

```
{\"messages\":[{\"role\":\"system\",\"content\":\"You are an expert in generating Selenium Java
page object classes using provided DOM information. Follow the framework's
guidelines: use SeleniumBase wrapper methods, proper locators, and insert TODO
comments if a mapping is missing. Make sure every page method includes comments in
your generated code as the training examples may not have
comments\"},{\"role\":\"user\",\"content\":\"Given the following DOM structure:\n` `` `html\n<a
href=\\\"/crmsfa/control/leadsMain\\\" id=\\\"ext-gen614\\\">Leads</a>\n` `` `nGenerate a
Selenium Java page object class for this DOM.\"},{\"role\":\"assistant\",\"content\":\"package
com.leafaptaps.pages;\n\nimport com.framework.selenium.api.design.Locators;\nimport
com.framework.testng.api.base.ProjectSpecificMethods;\n\n/**\n * Page object
representing the My Home page after navigating from HomePage.\n * Provides methods
to navigate to the Leads page.\n * @author Auto-generated\n */\npublic class
MyHomePage extends ProjectSpecificMethods {\n\n\t/**\n\t * Clicks the Leads link to
navigate to MyLeadsPage.\n\t * @return A new MyLeadsPage instance\n\t */\n\tpublic
MyLeadsPage clickLeadsLink() {\n\t\tclick(locateElement(Locators.LINK_TEXT,
\"Leads\"));\n\t\treportStep(\"Leads link is clicked\", \"pass\");\n\t\treturn new
MyLeadsPage();\n\t}\n\n}}}
```

```
{\"messages\":[{\"role\":\"system\",\"content\":\"You are an expert in generating Selenium Java
page object classes using provided DOM information. Follow the framework's
guidelines: use SeleniumBase wrapper methods, proper locators, and insert TODO
comments if a mapping is missing. Make sure every page method includes comments in
your generated code as the training examples may not have
comments\"},{\"role\":\"user\",\"content\":\"Given the following DOM structure:\n` `` `html\n<a
href=\\\"/crmsfa/control/createLeadForm\\\" id=\\\"ext-gen876\\\">Create
Lead</a>\n` `` `nGenerate a Selenium Java page object class for this
DOM.\"},{\"role\":\"assistant\",\"content\":\"// Package declaration for the pages in the leafaptaps
application\npackage com.leafaptaps.pages;\n\n// Importing locator strategies and base
methods for the project\nimport
com.framework.selenium.api.design.Locators;\nimport
com.framework.testng.api.base.ProjectSpecificMethods;\n\n/**\n * This class
represents the My Leads page in the leafaptaps application.\n * It provides methods to
interact with elements and perform actions on the My Leads page.\n */\npublic class
MyLeadsPage extends ProjectSpecificMethods {\n\n\t/**\n\t * Clicks on the 'Create
Lead' link on the My Leads page.\n\t * @return MyLeadsPage - returns the current
page object for method chaining\n\t */\n\tpublic MyLeadsPage clickCreateLeadLink()
{\n\t\t// Locate and click the 'Create Lead' link using LINK_TEXT
```



```

{\r\n    clearAndType(locateElement(\"orderName\"),
orderName);\r\n    reportStep(orderName + \" order name is entered successfully\",
\"pass\");\r\n    return this;\r\n } \r\n\r\n /**\r\n  * Enters the customer
name.\r\n  * @param customerName The customer name to enter\r\n  * @return The
current OrderEntryHeaderPage instance\r\n  */\r\n public OrderEntryHeaderPage
enterCustomerName(String customerName)
{\r\n    clearAndType(locateElement(\"ComboBox_partyId\"),
customerName);\r\n    reportStep(customerName + \" customer name is entered
successfully\", \"pass\");\r\n    return this;\r\n } \r\n\r\n /**\r\n  * Enters the PO
number.\r\n  * @param poNumber The PO number to enter\r\n  * @return The
current OrderEntryHeaderPage instance\r\n  */\r\n public OrderEntryHeaderPage
enterPONumber(String poNumber)
{\r\n    clearAndType(locateElement(\"poNumber\"),
poNumber);\r\n    reportStep(poNumber + \" PO number is entered successfully\",
\"pass\");\r\n    return this;\r\n } \r\n\r\n /**\r\n  * Selects the tracking code from
the dropdown.\r\n  * @param trackingCode The tracking code to select\r\n  * @return
The current OrderEntryHeaderPage instance\r\n  */\r\n public OrderEntryHeaderPage
selectTrackingCode(String trackingCode)
{\r\n    selectDropDownUsingText(locateElement(\"trackingCodeId\"),
trackingCode);\r\n    reportStep(trackingCode + \" tracking code is selected
successfully\", \"pass\");\r\n    return this;\r\n } \r\n\r\n /**\r\n  * Enters the
commission representative name.\r\n  * @param salesRep The sales representative
name to enter\r\n  * @return The current OrderEntryHeaderPage
instance\r\n  */\r\n public OrderEntryHeaderPage enterCommissionRep(String
salesRep) {\r\n    clearAndType(locateElement(\"salesRepPartyId\"),
salesRep);\r\n    reportStep(salesRep + \" commission representative is entered
successfully\", \"pass\");\r\n    return this;\r\n } \r\n\r\n /**\r\n  * Clicks the Update
button to submit the order.\r\n  * @return A new OrderEntryHeaderPage
instance\r\n  */\r\n public OrderEntryHeaderPage clickUpdate()
{\r\n    click(Locators.LINK_TEXT, \"Update\");\r\n    reportStep(\"Update button is
clicked successfully\", \"pass\");\r\n    return this;\r\n } \r\n\r\n /**\r\n  * Clicks the
Cancel Order button to cancel the order.\r\n  * @return A new OrderEntryHeaderPage
instance\r\n  */\r\n public OrderEntryHeaderPage clickCancelOrder()
{\r\n    click(Locators.LINK_TEXT, \"Cancel Order\");\r\n    reportStep(\"Cancel Order
button is clicked successfully\", \"pass\");\r\n    return this;\r\n } \r\n\r\n }
}

```

{"messages":[{"role":"system","content":"You are an expert in generating Selenium Java page object classes using provided DOM information. Follow the framework's guidelines: use SeleniumBase wrapper methods, proper locators, and insert TODO comments if a mapping is missing. Make sure every page method includes comments in your generated code as the training examples may not have

```

comments"},"role":"user","content":"Given the following DOM
structure:\n` `` `html\n<input id=\"uploadedFile\" name=\"uploadedFile\" type=\"file\"
size=\"30\" maxlength=\"\" class=\"inputBox\" onchange=\"\">\n<input type=\"submit\"
value=\"Upload and Import\" class=\"smallSubmit\"
onclick=\"submitFormAndReplaceButtonTextWithSingleClick(this, 'Uploading... Please
Wait');\" id=\"ext-gen593\">\n` `` ` \nGenerate a Selenium Java page object class for this
DOM.\"},{\"role\":\"assistant\",\"content\":\"package com.leaf taps.pages;\n\nimport
com.framework.selenium.api.design.Locators;\nimport
com.framework.testng.api.base.ProjectSpecificMethods;\n\n/**\n * Page object
representing the Upload Lead page.\n * Provides methods to upload a file and import
leads.\n * @author Auto-generated\n */\npublic class UploadLeadPage extends
ProjectSpecificMethods {\n\n\t/**\n\t * Uploads a file for lead import.\n\t * @param
fileName The file name to upload\n\t * @return The current UploadLeadPage
instance\n\t */\n\tpublic UploadLeadPage uploadFile(String fileName)
{\n\t\ttype(locateElement(Locators.ID,\"uploadedFile\"),
fileName);\n\t\treportStep(fileName+\" is uploaded\", \"pass\");\n\t\treturn
this;\n\t}\n\n\t/**\n\t * Clicks the Upload and Import button to import leads.\n\t *
@return The current UploadLeadPage instance\n\t */\n\tpublic UploadLeadPage
clickUploadAndImport()
{\n\t\tclick(locateElement(Locators.XPATH,\"//input[@value='Upload and
Import']\"));\n\t\treturn this;\n\t}\n\n}}

```

{"messages":[{"role":"system","content":"You are an expert in generating Selenium Java page object classes using provided DOM information. Follow the framework's guidelines: use SeleniumBase wrapper methods, proper locators, and insert TODO comments if a mapping is missing. Make sure every page method includes comments in your generated code as the training examples may not have

```

comments"},"role":"user","content":"Given the following DOM
structure:\n` `` `html\n<div class=\"x-grid3-cell-inner x-grid3-col-partyId\"
unselectable=\"on\" id=\"ext-gen781\"><a class=\"linktext\"
href=\"/crmsfa/control/viewLead?partyId=10196\" id=\"ext-
gen839\">10196</a></div>\r\n<div class=\"x-grid3-cell-inner x-grid3-col-firstName\"
unselectable=\"on\" id=\"ext-gen840\"><a class=\"linktext\"
href=\"/crmsfa/control/viewLead?partyId=10196\" id=\"ext-
gen841\">TCS</a></div>\r\n<div class=\"x-grid3-cell-inner x-grid3-col-lastName\"
unselectable=\"on\" id=\"ext-gen842\"><a class=\"linktext\"
href=\"/crmsfa/control/viewLead?partyId=10196\" id=\"ext-
gen874\">Abd</a></div>\r\n<div class=\"x-grid3-cell-inner x-grid3-col-
companyName\" unselectable=\"on\" id=\"ext-gen857\"><a class=\"linktext\"
href=\"/crmsfa/control/viewLead?partyId=10196\" id=\"ext-gen858\">M
S</a></div>\n` `` ` \nGenerate a Selenium Java page object class for this

```



```

DOM."},{
  "role": "assistant",
  "content": "package com.leaf taps.pages;

import
com.framework.selenium.api.design.Locators;
import
com.framework.testng.api.base.ProjectSpecificMethods;


/**
 * Page object
 * representing the View Lead page.
 * Provides methods to verify lead details and
 * perform actions like delete.
 * @author Auto-generated
 */
public class
ViewLeadPage extends ProjectSpecificMethods {

    /**
     * Verifies the first
     * name displayed on the View Lead page.
     * @param fName The expected first
     * name
     * @return The current ViewLeadPage instance
     */
    public
    ViewLeadPage verifyFirstName(String fName)
    {
        verifyExactText(locateElement(Locators.ID, "viewLead_firstName_sp"),
            fName);
        reportStep(fName + " is matching with first name",
            "pass");
        return this;
    }



    /**
     * Verifies the company name
     * displayed on the View Lead page.
     * @param CompanyName The expected
     * company name
     * @return The current ViewLeadPage instance
     */
    public
    ViewLeadPage verifyCompanyName(String CompanyName)
    {
        verifyPartialText(locateElement(Locators.ID, "viewLead_companyName_sp"),
            CompanyName);
        return this;
    }

    /**
     * Clicks the Delete link to
     * delete the lead.
     * @return A new MyLeadsPage instance
     */
    public
    MyLeadsPage clickDeleteLeadLink()
    {
        click(locateElement(Locators.LINK_TEXT, "Delete"));
        reportStep("
        Clicked on DeleteLead Button", "pass");
        return new
        MyLeadsPage();
    }
}

```

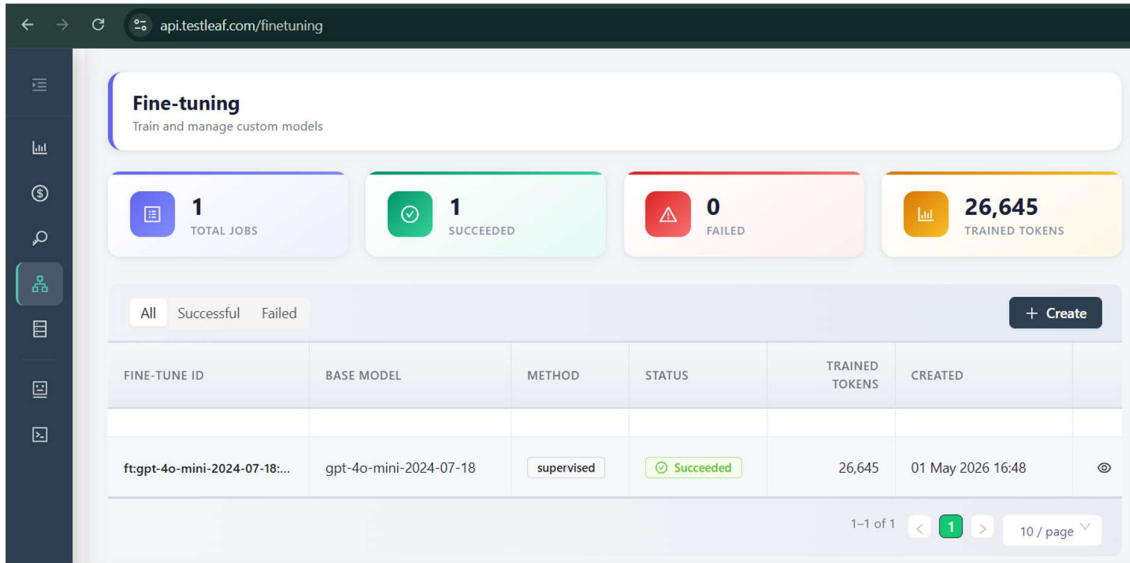

```
File Edit Selection View Go Run Terminal Help
ai-extension
src > scripts > .js popup.js > document.addEventListener(DOMContentLoaded) callback > updateModelOptions
5 document.addEventListener('DOMContentLoaded', () => {
101   const providerSelect = document.getElementById('provider-select');
102   const modelSelect = document.getElementById('model-select');
103   const groqApiKeyInput = document.getElementById('groqApiKey');
104   const openaiApiKeyInput = document.getElementById('openaiApiKey');
105   const testleafApiKeyInput = document.getElementById('testleafApiKey');
106
107   // Model options by provider
108   const modelsByProvider = {
109     groq: [
110       { value: 'meta-llama/llama-4-maverick-17b-128e-instruct', label: 'meta-llama/llama-4-m' },
111       { value: 'openai/gpt-oss-120b', label: 'openai/gpt-oss-120b' },
112     ],
113     openai: [
114       { value: 'gpt-4o', label: 'GPT-4o' },
115       { value: 'gpt-4o-mini', label: 'GPT-4o Mini' },
116     ],
117     testleaf: [
118       { value: 'gpt-4o', label: 'GPT-4o' },
119       { value: 'gpt-4o-mini', label: 'GPT-4o Mini' },
120       { value: 'ft:gpt-4o-mini-2024-07-18:testleaf-2:Daq8B2gf', label: 'Finetuned model' },
121     ],
122   ];
123
124   // Function to update model options based on selected provider
125   function updateModelOptions(provider) {
126     modelSelect.innerHTML = '<option value="" disabled>Select the model...</option>';
127
128     if (provider) {
129       modelSelect.disabled = false;
130       const models = modelsByProvider[provider] || [];
131       models.forEach(model => {
132         const option = document.createElement('option');
133         option.value = model.value;
134         option.textContent = model.label;
135         modelSelect.appendChild(option);
136       });
137     }
138   }
139
140   providerSelect.addEventListener('change', () => {
141     updateModelOptions(providerSelect.value);
142   });
143
144   // Initialize model options
145   updateModelOptions(providerSelect.value);
146 });
```

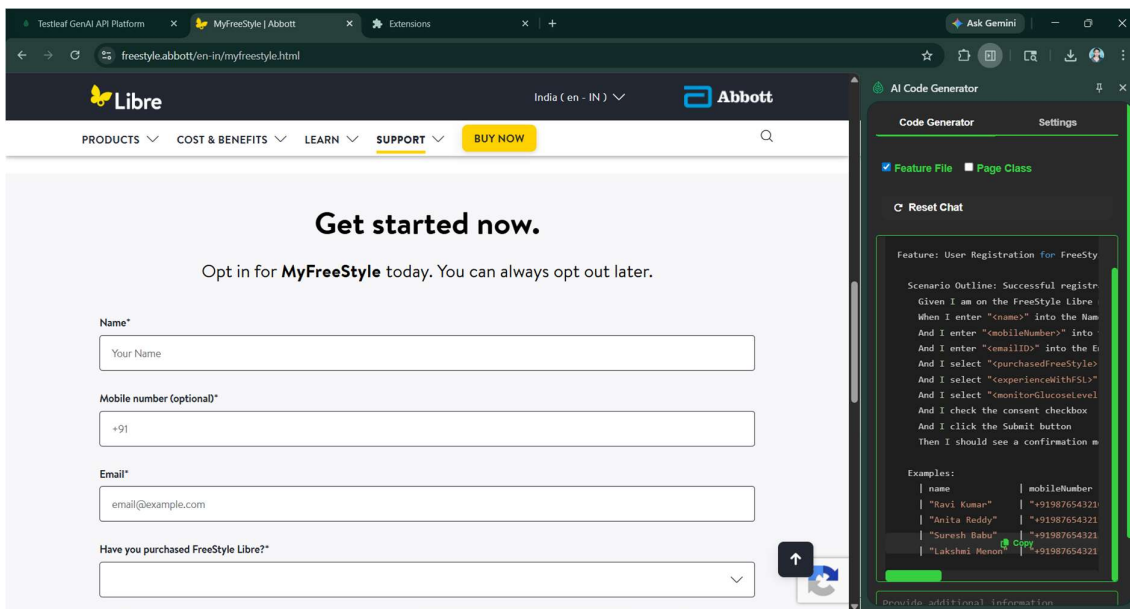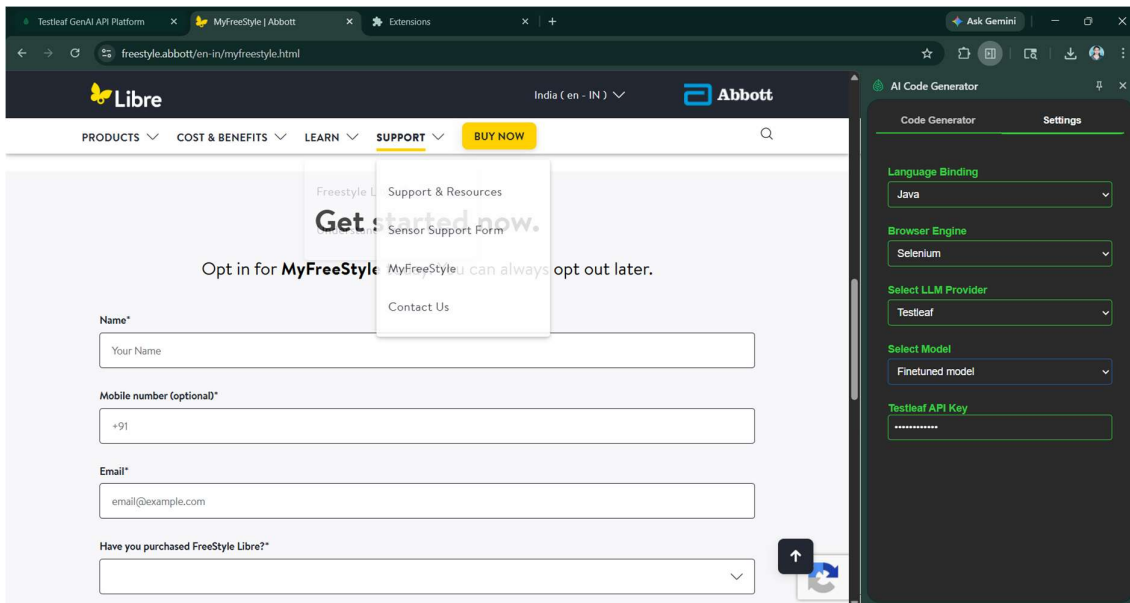

Code GeneratorSettings

Feature File Page Class

Reset Chat

Feature: User Registration for FreeStyle Libre

Scenario Outline: Successful registration with valid details

Given I am on the FreeStyle Libre registration page

When I enter "<name>" into the Name field

And I enter "<mobileNumber>" into the Mobile number field

And I enter "<emailID>" into the Email field

And I select "<purchasedFreeStyle>" from the dropdown "Have you purchased FreeStyle Libre?"

And I select "<experienceWithFSL>" from the dropdown "My experience with the FreeStyle Libre system is as a:"

And I select "<monitorGlucoseLevels>" from the dropdown "I monitor my glucose levels"

And I check the consent checkbox

And I click the Submit button

Then I should see a confirmation message

Examples:

name	mobileNumber	emailID	purchasedFreeStyle	
experienceWithFSL		monitorGlucoseLevels		
"Ravi Kumar"	"+919876543210"	"ravi.kumar@example.com"	"Yes"	
"Person with Type 1 Diabetes"	"Daily"			
"Anita Reddy"	"+919876543211"	"anita.reddy@example.com"	"No"	
"Caregiver"	"Weekly"			
"Suresh Babu"	"+919876543212"	"suresh.babu@example.com"	"Yes"	
"Parent"	"Monthly"			
"Lakshmi Menon"	"+919876543213"	"lakshmi.menon@example.com"	"No"	
"Person with Type 2 Diabetes"	"Yearly"			

Copy

InspectGenerate