SHOW TABLE STATUS

Tabla persona 1:


```
mysql> SHOW TABLE STATUS WHERE `Name` = 'persona1'\G
*************************** 1. row ***************************
           Name: persona1
         Engine: MyISAM
        Version: 10
     Row_format: Dynamic
           Rows: 3
 Avg_row_length: 21
    Data_length: 64
Max_data_length: 281474976710655
   Index_length: 1024
      Data_free: 0
 Auto_increment: 1
    Create_time: 2026-08-07 11:52:12
    Update_time: 2026-08-07 11:52:37
     Check_time: NULL
      Collation: utf8mb4_0900_ai_ci
       Checksum: NULL
 Create_options:
        Comment:
1 row in set (0.00 sec)
```

Tabla persona 2:

```
mysql> SHOW TABLE STATUS WHERE `Name` = 'persona2'\G
*************************** 1. row ***************************
           Name: persona2
         Engine: MyISAM
        Version: 10
     Row_format: Dynamic
           Rows: 3
 Avg_row_length: 24
    Data_length: 72
Max_data_length: 281474976710655
   Index_length: 1024
      Data_free: 0
 Auto_increment: 1
    Create_time: 2026-08-07 11:52:29
    Update_time: 2026-08-07 11:52:43
     Check_time: NULL
      Collation: utf8mb4_0900_ai_ci
       Checksum: NULL
 Create_options:
        Comment:
```


Juan Carlos Rodríguez López
202231970

Tabla cliente:

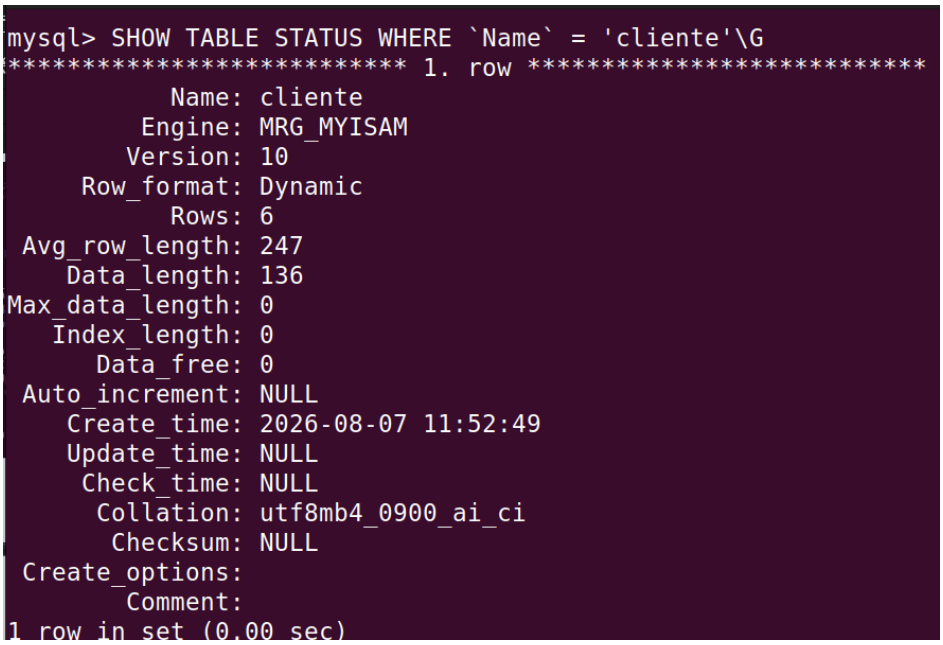

```
mysql> SHOW TABLE STATUS WHERE `Name` = 'cliente'\G
*************************** 1. row ***************************
           Name: cliente
         Engine: MRG_MYISAM
        Version: 10
     Row_format: Dynamic
           Rows: 6
 Avg_row_length: 247
    Data_length: 136
Max_data_length: 0
   Index_length: 0
      Data_free: 0
 Auto_increment: NULL
    Create_time: 2026-08-07 11:52:49
    Update_time: NULL
     Check_time: NULL
      Collation: utf8mb4_0900_ai_ci
       Checksum: NULL
 Create_options:
        Comment:
1 row in set (0.00 sec)
```

Tabla heaptest:

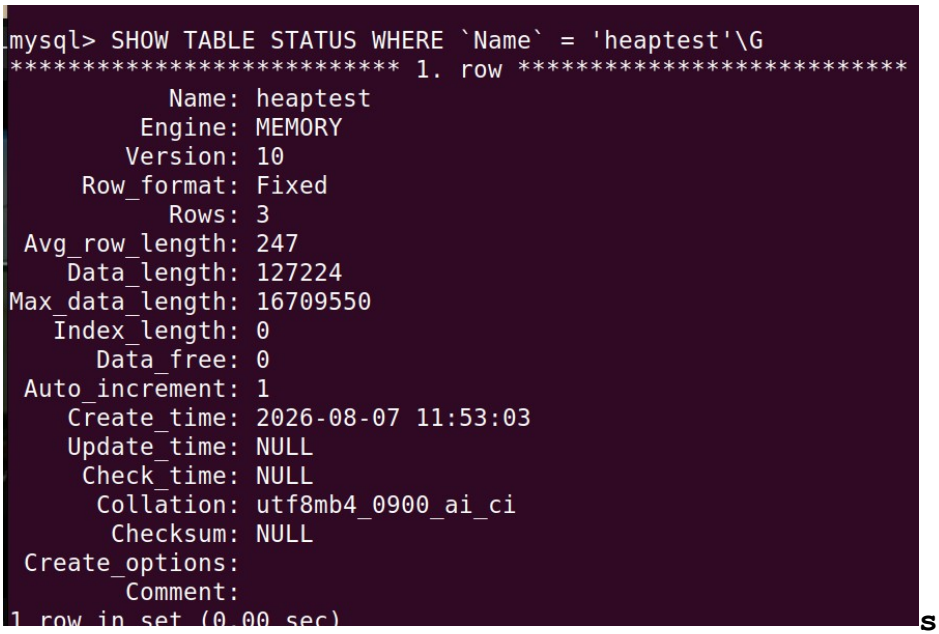

```
mysql> SHOW TABLE STATUS WHERE `Name` = 'heaptest'\G
*************************** 1. row ***************************
           Name: heaptest
         Engine: MEMORY
        Version: 10
     Row_format: Fixed
           Rows: 3
 Avg_row_length: 247
    Data_length: 127224
Max_data_length: 16709550
   Index_length: 0
      Data_free: 0
 Auto_increment: 1
    Create_time: 2026-08-07 11:53:03
    Update_time: NULL
     Check_time: NULL
      Collation: utf8mb4_0900_ai_ci
       Checksum: NULL
 Create_options:
        Comment:
1 row in set (0.00 sec)
```

s

Juan Carlos Rodríguez López
202231970

Tabla factura:

```
mysql> SHOW TABLE STATUS WHERE `Name` = 'factura'\G
*************************** 1. row ***************************
           Name: factura
         Engine: InnoDB
        Version: 10
     Row_format: Dynamic
           Rows: 3
 Avg_row_length: 5461
    Data_length: 16384
Max_data_length: 0
   Index_length: 0
      Data_free: 0
 Auto_increment: NULL
    Create_time: 2026-08-07 11:53:25
    Update_time: 2026-08-07 11:53:35
     Check_time: NULL
      Collation: utf8mb4_0900_ai_ci
       Checksum: NULL
 Create_options:
        Comment:
1 row in set (0.00 sec)
```

Juan Carlos Rodríguez López
202231970

SELECT * FROM

Tabla persona 1:

Tabla persona 2:

```
+------+--------+----------+
| id   | nombre | apellido |
+------+--------+----------+
|    1 | Carlos | Prez     |
|    2 | Mara   | Gmez     |
|    3 | Jorge  | Ruiz     |
+------+--------+----------+
3 rows in set (0.00 sec)

mysql> SELECT * FROM persona2;
+------+--------+----------+
| id   | nombre | apellido |
+------+--------+----------+
|    4 | Luca   | Torres   |
|    5 | Andrs  | Flores   |
|    6 | Paula  | Mndez    |
+------+--------+----------+
3 rows in set (0.00 sec)
```

Juan Carlos Rodríguez López
202231970

Tabla cliente:

```
mysql> SELECT * FROM cliente;
+------+--------+----------+
| id   | nombre | apellido |
+------+--------+----------+
|    1 | Carlos | Prez     |
|    2 | Mara   | Gmez     |
|    3 | Jorge  | Ruiz     |
|    4 | Luca   | Torres   |
|    5 | Andrs  | Flores   |
|    6 | Paula  | Mndez    |
+------+--------+----------+
6 rows in set (0.00 sec)
```

Tabla heaptest:

```
mysql> SELECT * FROM heaptest;
+------+--------+----------+
| id   | nombre | apellido |
+------+--------+----------+
|    1 | Carlos | Prez     |
|    2 | Mara   | Gmez     |
|    3 | Jorge  | Ruiz     |
+------+--------+----------+
3 rows in set (0.00 sec)
```

Tabla factura:

```
mysql> SELECT * FROM factura;
+------+--------+------------+
| id   | monto  | fecha      |
+------+--------+------------+
|    1 | 150.50 | 2026-08-01 |
|    2 | 320.00 | 2026-08-03 |
|    3 |  75.25 | 2026-08-05 |
+------+--------+------------+
3 rows in set (0.00 sec)
```

Juan Carlos Rodríguez López
202231970

Motores de tabla

MyISAM:

Es muy rápida para lectura, pero debido a que no soporta transacciones ni claves foráneas, la usaría mas para catalogaros para que no tengan cambios contantes.

MERGE:

Esta no almacena datos propios, como se mencionaba es mas como una vista, de varias tablas juntas, pero deben de tener la misma estructura.

HEAP:

Esta guarda datos en la RAM, no en nuestro disco duro, debido a esto es muy rápida, pero al momento de reiniciar todo lo almacenado en esa tabla se borra.

InnoDB:

Estas tablas soportan transacciones, claves foráneas y ademas es seguro ante fallos.

Juan Carlos Rodríguez López
202231970

Tipos de operadores en SQL

Lógicos:

Estos son condicionales como AND, NOT y OR.

Aritméticos:

Nos ayudan a realizar cálculos matemáticos, algunos operadores son +,*,-,/,%.

De comparación:

Nos ayudan a comparar varios valores con =, !=, <, >, <=, >=.

REGEXP:

Nos ayuda a buscar patrones con expresiones regulares, y es mas flexible que LIKE.

Juan Carlos Rodríguez López
202231970