

Creación de la instancia EC2

It seems like you may be new to launching instances in EC2. Take a walkthrough to learn about EC2, how to launch instances and about best practices.

Take a walkthroughDo not show me this message again.

Launch an instance

Amazon EC2 allows you to create virtual machines, or instances, that run on the AWS Cloud. Quickly get started by following the simple steps below.

Name and tags

Name

taskflow-ec2

Add additional tags

Application and OS Images (Amazon Machine Image)

An AMI contains the operating system, application server, and applications for your instance. If you don't see a suitable AMI below, use the search field or choose [Browse more AMIs](#).

Search our full catalog including 1000s of application and OS images

RecentsQuick Start

Amazon LinuxmacOSUbuntuWindowsRed HatSUSE LinuxDebian

Browse more AMIs

Including AMIs from AWS, Marketplace and the Community

Amazon Machine Image (AMI)

Amazon Linux 2023 kernel-6.18 AMI
ami-0354c58ae10a02961 | ami-0a127d958972d109 (S4-bit AMI, x86)
Virtualization: true | ENA enabled: true | Root device type: xfs

Free tier eligible

Description

Amazon Linux 2023 (kernel 6.18) is a modern, general purpose Linux-based OS that will be supported until June 2029. It is optimized for AWS and designed to provide a secure, stable and high-performance execution environment to develop and run your cloud applications.

Amazon Linux 2023 AMI 2023.12.20260909.0 x86_64 HVM kernel-6.18

Architecture

x86_64 (x86)

Boot mode

uefi-preferred

AMI ID

ami-0354c58ae10a02961

Creation Date

2026-09-09

Username

ec2-user

Verified provider

Instance type

t3.micro

Family: T3 | 2 vCPU | 1 GB Memory | Current generation: true | On-Demand Linux base pricing: \$0.014 USD per /hour

Free tier eligible

All generations

Summary

Number of instances

1

Software Image (AMI)

Amazon Linux 2023 AMI 2023.12...read more
ami-0354c58ae10a02961

Virtual server type (instance type)

t3.micro

Firewall (security group)

New security group

Storage (volumes)

1 volume(s) | 8 GiB

Cancel

Launch instance

Preview code

Additional costs apply for AMIs with pre-installed software

Key pair (login)

You can use a key pair to securely connect to your instance. Ensure that you have access to the selected key pair before you launch the instance.

Key pair name - required

taskflow-key

Create new key pair

Network settings

VPC - required

vpc-00630e5f8b8076f174
172.31.0.0/16

(default)

Create new VPC

Subnet

No preference

Create new subnet

Availability Zone

No preference

Enable additional zones

Auto-assign public IP

Enable

Firewall (security groups)

A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.

Create security group

Select existing security group

Security group name - required

taskflow-ec2-sg

This security group will be applied to all network interfaces. The name can't be edited after the security group is created. Max length is 255 characters. Valid characters are: A-Z, 0-9, spaces, and _/!@#\$%^&*()~`{|}~

Description - required

launch-wizard-1 created 2026-09-11T21:46:39.125Z

Inbound Security Group Rules

Security group rule 1 (TCP: 22, 0.0.0.0/0)

Type

SSH

Protocol

TCP

Port range

22

Source type

Anywhere

Source

0.0.0.0/0

Description - optional

e.g. SSH for admin desktop

Remove

Summary

Number of instances

1

Software Image (AMI)

Amazon Linux 2023 AMI 2023.12...read more
ami-0354c58ae10a02961

Virtual server type (instance type)

t3.micro

Firewall (security group)

New security group

Storage (volumes)


1 volume(s) | 8 GiB

Cancel


Launch instance

Preview code

Instance EC2 Up and running:

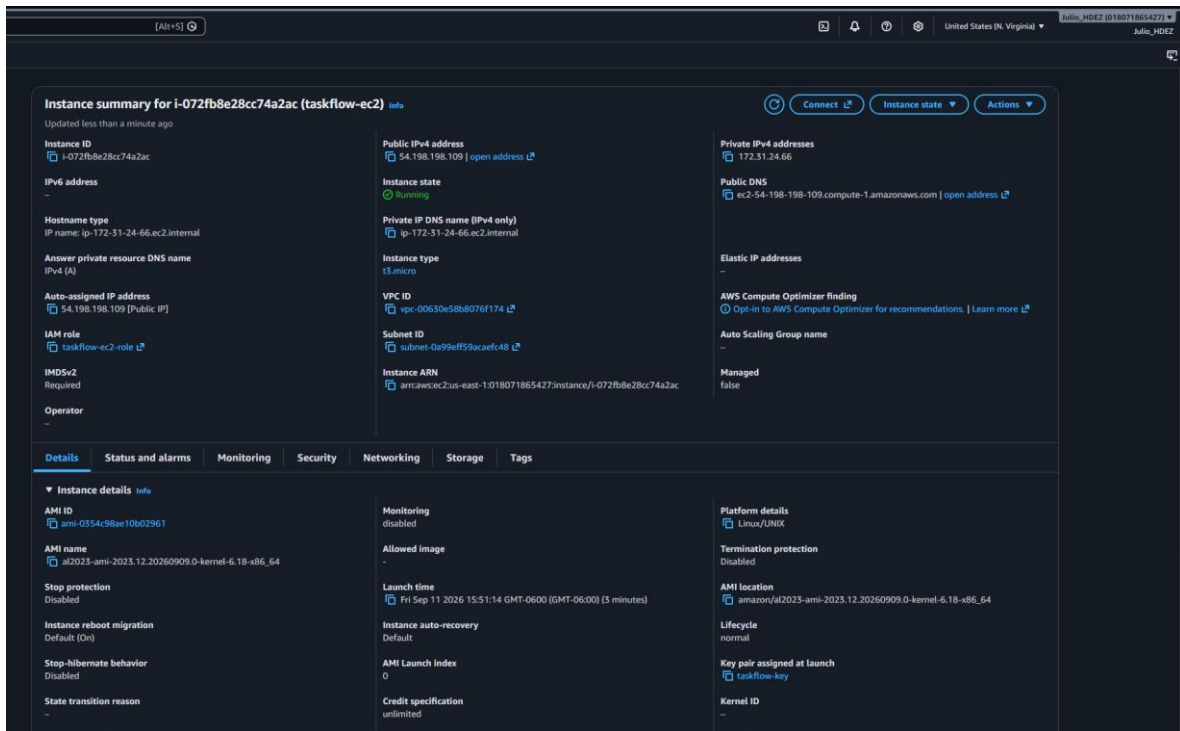

Conexión de GitBash:

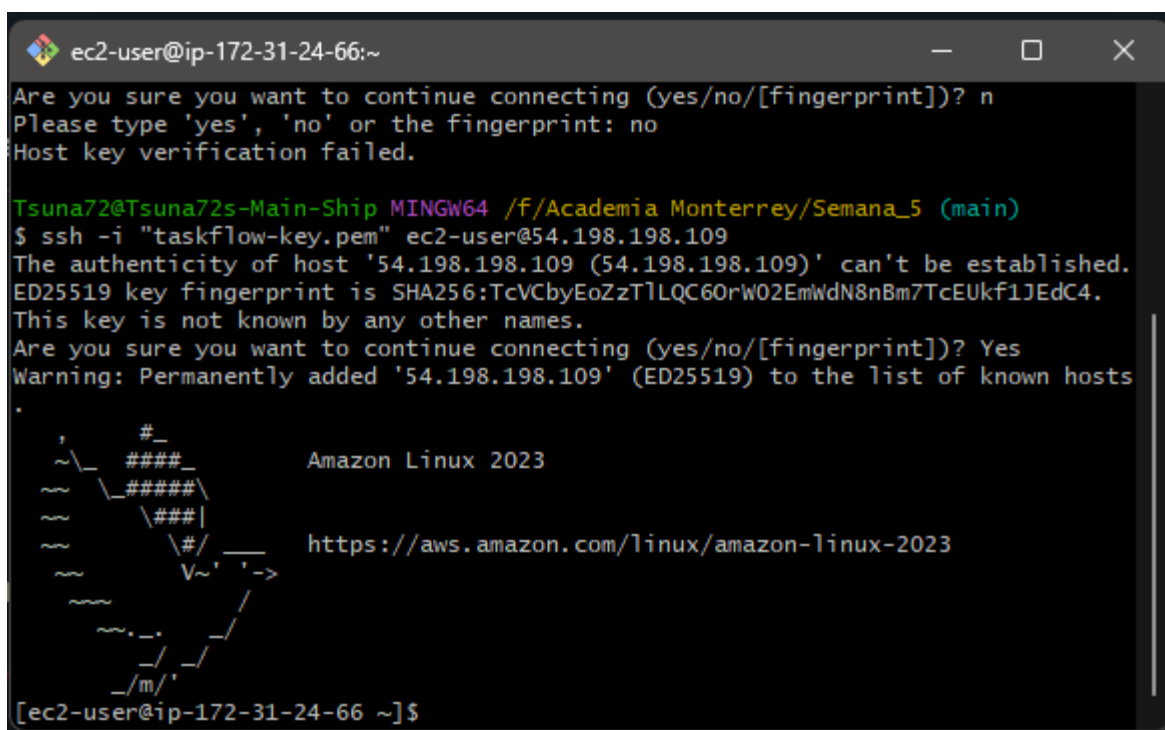

Java instalado y Ruby instalación:

```
ec2-user@ip-172-31-24-66:~  
fontconfig-2.13.94-2.amzn2023.0.2.x86_64  
fonts-filesystem-1:2.0.5-12.amzn2023.0.2.noarch  
freetype-2.13.2-5.amzn2023.0.2.x86_64  
google-noto-fonts-common-20240401-1.amzn2023.0.2.noarch  
google-noto-sans-vf-fonts-20240401-1.amzn2023.0.2.noarch  
graphite2-1.3.14-7.amzn2023.0.3.x86_64  
harfbuzz-7.0.0-2.amzn2023.0.2.x86_64  
java-21-amazon-corretto-headless-1:21.0.12+9-1.amzn2023.1.x86_64  
javapackages-filesystem-6.0.0-7.amzn2023.0.6.noarch  
langpacks-core-font-en-3.0-21.amzn2023.0.4.noarch  
libX11-1.8.10-2.amzn2023.0.1.x86_64  
libX11-common-1.8.10-2.amzn2023.0.1.noarch  
libXau-1.0.11-6.amzn2023.0.1.x86_64  
libXext-1.3.6-1.amzn2023.0.1.x86_64  
libXrender-0.9.11-6.amzn2023.0.1.x86_64  
libbrotli-1.0.9-4.amzn2023.0.2.x86_64  
libjpeg-turbo-2.1.4-2.amzn2023.0.5.x86_64  
libpng-2:1.6.37-10.amzn2023.0.13.x86_64  
libxcb-1.17.0-1.amzn2023.0.1.x86_64  
pixman-0.43.4-1.amzn2023.0.4.x86_64  
xml-common-0.6.3-56.amzn2023.0.2.noarch  
  
Complete!  
[ec2-user@ip-172-31-24-66 ~]$ java -version  
openjdk version "21.0.12.1" 2026-08-18 LTS  
OpenJDK Runtime Environment Corretto-21.0.12.9.1 (build 21.0.12.1+9-LTS)  
OpenJDK 64-Bit Server VM Corretto-21.0.12.9.1 (build 21.0.12.1+9-LTS, mixed mode, sharing)  
[ec2-user@ip-172-31-24-66 ~]$ sudo dnf install -y ruby wget
```

Setting Region:

```
ec2-user@ip-172-31-24-66:~  
Verifying      : ruby3.2-3.2.8-184.amzn2023.0.6.x86_64 1/11  
Verifying      : ruby3.2-default-gems-3.2.8-184.amzn2023.0.6.noarch 2/11  
Verifying      : ruby3.2-libs-3.2.8-184.amzn2023.0.6.x86_64 3/11  
Verifying      : ruby3.2-rubygem-bigdecimal-3.1.3-184.amzn2023.0.6.x86_64 4/11  
Verifying      : ruby3.2-rubygem-bundler-2.4.19-184.amzn2023.0.6.noarch 5/11  
Verifying      : ruby3.2-rubygem-io-console-0.6.0-184.amzn2023.0.6.x86_64 6/11  
Verifying      : ruby3.2-rubygem-json-2.6.3-184.amzn2023.0.6.x86_64 7/11  
Verifying      : ruby3.2-rubygem-psych-5.0.1-184.amzn2023.0.6.x86_64 8/11  
Verifying      : ruby3.2-rubygem-rdoc-6.5.1.1-184.amzn2023.0.6.noarch 9/11  
Verifying      : ruby3.2-rubygems-3.4.19-184.amzn2023.0.6.noarch 10/11  
Verifying      : ruby4.0-default-gems-4.0.1-32.amzn2023.0.3.noarch 11/11  
  
Installed:  
ruby3.2-3.2.8-184.amzn2023.0.6.x86_64  
ruby3.2-default-gems-3.2.8-184.amzn2023.0.6.noarch  
ruby3.2-libs-3.2.8-184.amzn2023.0.6.x86_64  
ruby3.2-rubygem-bigdecimal-3.1.3-184.amzn2023.0.6.x86_64  
ruby3.2-rubygem-bundler-2.4.19-184.amzn2023.0.6.noarch  
ruby3.2-rubygem-io-console-0.6.0-184.amzn2023.0.6.x86_64  
ruby3.2-rubygem-json-2.6.3-184.amzn2023.0.6.x86_64  
ruby3.2-rubygem-psych-5.0.1-184.amzn2023.0.6.x86_64  
ruby3.2-rubygem-rdoc-6.5.1.1-184.amzn2023.0.6.noarch  
ruby3.2-rubygems-3.4.19-184.amzn2023.0.6.noarch  
ruby4.0-default-gems-4.0.1-32.amzn2023.0.3.noarch  
  
Complete!  
[ec2-user@ip-172-31-24-66 ~]$ cd /home/ec2-user  
[ec2-user@ip-172-31-24-66 ~]$ REGION=us-east-1
```

```
ec2-user@ip-172-31-24-66:~  
I, [2026-09-11T22:06:09.693463 #26648] INFO -- : Checking AWS_REGION environment variable for region information...  
I, [2026-09-11T22:06:09.693516 #26648] INFO -- : Checking EC2 metadata service for region information...  
I, [2026-09-11T22:06:09.709847 #26648] INFO -- : Checking AWS_DOMAIN environment variable for domain information...  
I, [2026-09-11T22:06:09.709888 #26648] INFO -- : Checking EC2 metadata service for domain information...  
I, [2026-09-11T22:06:09.712790 #26648] INFO -- : Downloading version file from bucket aws-codedeploy-us-east-1 and key latest/LATEST_VERSION...  
I, [2026-09-11T22:06:09.712958 #26648] INFO -- : Endpoint: https://aws-codedeploy-us-east-1.s3.us-east-1.amazonaws.com/latest/LATEST_VERSION  
I, [2026-09-11T22:06:09.767744 #26648] INFO -- : Downloading package from bucket aws-codedeploy-us-east-1 and key releases/codedeploy-agent-1.8.1-26.noarch.rpm...  
I, [2026-09-11T22:06:09.767878 #26648] INFO -- : Endpoint: https://aws-codedeploy-us-east-1.s3.us-east-1.amazonaws.com/releases/codedeploy-agent-1.8.1-26.noarch.rpm  
I, [2026-09-11T22:06:09.857054 #26648] INFO -- : Executing '/usr/bin/yum -y localinstall /tmp/codedeploy-agent-1.8.1-26.noarch.tmp-20260911-26648-xtjem1.rpm'...  
Last metadata expiration check: 0:03:35 ago on Fri Sep 11 22:02:35 2026.  
Dependencies resolved.  
=====
```

Package	Architecture	Version	Repository	Size
Installing: codedeploy-agent	noarch	1.8.1-26	@commandline	2.8 M

```
=====
```

Transaction Summary

=====

Install 1 Package

Total size: 2.8 M
Installed size: 13 M
Downloading Packages:
Running transaction check
Transaction check succeeded.
Running transaction test
Transaction test succeeded.
Running transaction
 Preparing : 1/1
 Running scriptlet: codedeploy-agent-1.8.1-26.noarch 1/1

pre hook : 1
Checking if there is already a process named codedeploy-agent running.

Installing : codedeploy-agent-1.8.1-26.noarch 1/1
 Running scriptlet: codedeploy-agent-1.8.1-26.noarch 1/1

post hook : 1
Check if there is a codedeployagent config file.
Start codedeploy-agent in post hook if this is a first install.

Verifying : codedeploy-agent-1.8.1-26.noarch 1/1

Installed:
 codedeploy-agent-1.8.1-26.noarch

Complete!

```
I, [2026-09-11T22:06:13.269562 #26648] INFO -- : Update check complete.  
I, [2026-09-11T22:06:13.269602 #26648] INFO -- : Stopping updater.  
[ec2-user@ip-172-31-24-66 ~]$
```

Updating and mixing the repos:

```
MINGW64:/f/Academia Monterrey/Semana_5/taskflow-api

Tsuna72@Tsuna72s-Main-Ship MINGW64 /f/Academia Monterrey/Semana_5/taskflow-api (
main)
$ cp /f/academyMty/aws/dia-2/pipeline/taskflow.service /f/academyMty/aws/dia-2/p
ipeline/buildspec.yml /f/academyMty/aws/dia-2/pipeline/appspec.yml .
cp -R /f/academyMty/aws/dia-2/pipeline/scripts .
printf 'target/\ndata/\n' > .gitignore

Tsuna72@Tsuna72s-Main-Ship MINGW64 /f/Academia Monterrey/Semana_5/taskflow-api (
main)
$ git add scripts && git update-index --chmod=+x scripts/*.sh

Tsuna72@Tsuna72s-Main-Ship MINGW64 /f/Academia Monterrey/Semana_5/taskflow-api (
main)
$ git add scripts && git update-index --chmod=+x scripts/*.sh

Tsuna72@Tsuna72s-Main-Ship MINGW64 /f/Academia Monterrey/Semana_5/taskflow-api (
main)
$ git add .gitignore buildspec.yml appspec.yml taskflow.service scripts
git commit -m "ci: buildspec, appspec, hooks y taskflow.service" && git push
warning: in the working copy of '.gitignore', LF will be replaced by CRLF the ne
xt time Git touches it
[main 4d5eb27] ci: buildspec, appspec, hooks y taskflow.service
 8 files changed, 229 insertions(+)
 create mode 100644 .gitignore
 create mode 100644 appspec.yml
 create mode 100644 buildspec.yml
 create mode 100755 scripts/arrancar.sh
 create mode 100755 scripts/parar.sh
 create mode 100755 scripts/permisos.sh
 create mode 100755 scripts/verificar.sh
 create mode 100644 taskflow.service
Enumerating objects: 12, done.
Counting objects: 100% (12/12), done.
Delta compression using up to 12 threads
Compressing objects: 100% (10/10), done.
Writing objects: 100% (11/11), 6.16 KiB | 6.16 MiB/s, done.
Total 11 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
To https://github.com/JDHernandez04/taskflow-aws-JulioHdez
 b882ed6..4d5eb27  main -> main

Tsuna72@Tsuna72s-Main-Ship MINGW64 /f/Academia Monterrey/Semana_5/taskflow-api (
main)
$
```

e cada carpeta

Creating CodeDeploy Role:

The screenshot shows the 'Create role' wizard in the AWS IAM console. The current step is 'Step 1: Select trusted entity'. The left sidebar shows the progression: Step 1 (selected), Step 2: Add permissions, Step 3: Name, review, and create. The main area is titled 'Select trusted entity' and contains two sections: 'Trusted entity type' and 'Use case'.

Trusted entity type

- ☒ **AWS service**
Allow AWS services like EC2, Lambda, or others to perform actions in this account.
- ☐ **AWS account**
Allow entities in other AWS accounts belonging to you or a third party to perform actions in this account.
- ☐ **Web identity**
Allows users federated by the specified external web identity provider to assume this role to perform actions in this account.
- ☐ **SAML 2.0 federation**
Allow users federated with SAML 2.0 from a corporate directory to perform actions in this account.
- ☐ **Custom trust policy**
Create a custom trust policy to enable others to perform actions in this account.

Use case
Allow an AWS service like EC2, Lambda, or others to perform actions in this account.

Service or use case
CodeDeploy

Choose a use case for the specified service.

Use case

- ☒ **CodeDeploy**
Allows CodeDeploy to call AWS services such as Auto Scaling on your behalf.
- ☐ **CodeDeploy for Lambda**
Allows CodeDeploy to route traffic to a new version of an AWS Lambda function version on your behalf.
- ☐ **CodeDeploy - ECS**
Allows CodeDeploy to read S3 objects, invoke Lambda functions, publish to SNS topics, and update ECS services on your behalf.

Buttons: Cancel, Next

The screenshot shows the 'Roles' page in the AWS IAM console. A green banner at the top states 'Role taskflow-codedeploy-role created.' with a 'View role' button. Below this is the 'Roles (5)' section, which includes a search bar and a table of roles. At the bottom is the 'Roles Anywhere' section.

Roles (5)

An IAM role is an identity you can create that has specific permissions with credentials that are valid for short durations. Roles can be assumed by entities that you trust.

Role name	Trusted entities	Last activity
AWSServiceRoleForResourceExplorer	AWS Service: resource-explorer-2 (Service-Linked Role)	15 minutes ago
AWSServiceRoleForSupport	AWS Service: support (Service-Linked Role)	-
AWSServiceRoleForTrustedAdvisor	AWS Service: trustedadvisor (Service-Linked Role)	-
taskflow-codedeploy-role	AWS Service: codedeploy	-
taskflow-ec2-role	AWS Service: ec2	11 minutes ago

Roles Anywhere

Authenticate your non AWS workloads and securely provide access to AWS services.

Access AWS from your non AWS workloads

Operate your non AWS workloads using the same authentication and authorization strategy that you use within AWS.

X.509 Standard

Use your own existing PKI infrastructure or use AWS Certificate Manager Private Certificate Authority to authenticate identities.

Temporary credentials

Use temporary credentials with ease and benefit from the enhanced security they provide.

Buttons: Manage

Creación CodePipeline:

us-east-1 console.aws.amazon.com/codesuite/codedeploy/applications/taskflow/deployment-groups/new

Search [Alt+S]

CodeDeploy > Applications > Create application

Create application

Application configuration

Application name
Enter an application name

taskflow

100-character limit

Compute platform
Choose a compute platform

EC2/on-premises

Tags

Add tag

Cancel Create application

us-east-1 console.aws.amazon.com/codesuite/codedeploy/applications/taskflow/deployment-groups/new

Search [Alt+S]

CodeDeploy > Applications > taskflow > Create deployment group

Create deployment group

Application
Application
taskflow
Compute type
EC2/on-premises

Deployment group name
Enter a deployment group name

taskflow-dg

100 character limit

Service role
Enter a service role
Enter a service role with CodeDeploy permissions that grants AWS CodeDeploy access to your target instances.

arn:aws:iam::018071865427:role/taskflow-codedeploy-role

Deployment type
Choose how to deploy your application

☒ **In place**
Updates the instances in the deployment group with the latest application revisions. During a deployment, each instance will be briefly taken offline for its update.

☐ **Blue/green**
Replaces the instances in the deployment group with new instances and deploys the latest application revision to them. After instances in the replacement environment are registered with a load balancer, instances from the original environment are deregistered and can be terminated.

Environment configuration
Select any combination of Amazon EC2 Auto Scaling groups, Amazon EC2 instances and on-premises instances to add to this deployment

☐ Amazon EC2 Auto Scaling groups

☒ Amazon EC2 instances
1 unique matched instance. [Click here for details](#)

You can add up to three groups of tags for EC2 instances to this deployment group.
One tag group: Any instance identified by the tag group will be deployed to.
Multiple tag groups: Only instances identified by all the tag groups will be deployed to.

Tag group 1

Key	Value - optional	
taskflow-ec2		Remove tag

Agent Toolkit for AWS Feedback Console mobile app

© 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Applications > taskflow > taskflow-dg

Success
Deployment group created

EditDeleteCreate deployment

taskflow-dg

Deployment group details

Deployment group name
taskflow-dg

Deployment type
In place

Rollback enabled
False

Application name
taskflow

Service role ARN
arn:aws:iam::018071865427:role/taskflow-codedeploy-role

Agent update scheduler
Learn to schedule update in AWS Systems Manager

Compute platform
EC2/on-premises

Deployment configuration
CodeDeployDefault.AllAtOnce

Environment configuration: Amazon EC2 instances

Key	Value
Name	taskflow-ec2

Triggers

Name	Events	Type
No triggers have been created for this deployment group.		

Alarms

Name
No Amazon CloudWatch alarms have been created for this deployment group

Ignore alarm configuration
Enabled

Continue deployment even if alarm status is unavailable
Disabled

Deployment group tags

A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to help manage and secure your resources or to help track costs.

Key

Value

Feedback

Console mobile app

© 2026, Amazon Web Services, Inc. or its affiliates. PrivacyTermsCookie preferences

Crear Pipeline:

[Alt+S]

United States (N. Virginia)

Julio_HDEZ (018071865427)

Julio_HDEZ

ate new pipeline

Choose pipeline settings

info

Step 2 of 7

Pipeline settings

Pipeline name

Enter the pipeline name. You cannot edit the pipeline name after it is created.

taskflow-pipeline

No more than 100 characters

Execution mode

Info

Choose the execution mode for your pipeline. This determines how the pipeline is run.

☐ Superseded

☒ Queued

☐ Parallel

Service role

☒ New service role

Create a service role in your account

☐ Existing service role

Choose an existing service role from your account

Role name

AWSCodePipelineServiceRole-us-east-1-taskflow-pipeline

Type your service role name

☒ Allow AWS CodePipeline to create a service role so it can be used with this new pipeline

Advanced settings

Configure artifact store location, encryption settings, and pipeline variables for your pipeline.

Artifact store

☐ Default location

Create a default S3 bucket in your account.

☒ Custom location

Choose an existing S3 location from your account in the same region and account as your pipeline

Bucket

taskflow-artefactos-jdhernandez04

X

Encryption key

☒ Default AWS Managed Key

Use the AWS managed customer master key for CodePipeline in your account to encrypt the data in the artifact store.

☐ Customer Managed Key

To encrypt the data in the artifact store under an AWS KMS customer managed key, specify the key ID, key ARN, or alias ARN.

Variables

You can add variables at the pipeline level. You can choose to assign the value when you start the pipeline. [Learn more](#)

No variables defined at the pipeline level in this pipeline.

Add variable

ole Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates. [Privacy](#) [Terms](#) [Cookie preferences](#)

[Alt+S]

United States (N. Virginia)

Julio_HDEZ (018071865427)

Julio_HDEZ

ate new pipeline

Add source stage

info

Step 3 of 7

Source

Source provider

This is where you stored your input artifacts for your pipeline. Choose the provider and then provide the connection details.

GitHub (via GitHub App)

Connection

Choose an existing connection that you have already configured, or create a new one and then return to this task.

am:awscodeconnectionsus-

X

or

Connect to GitHub

Repository name

Choose a repository in your GitHub account.

JDHernandez04/taskflow-aws-JulioHdez

X

You can type or paste the group path to any project that the provided credentials can access. Use the format 'group/subgroup/project'.

Default branch

Default branch will be used only when pipeline execution starts from a different source or manually started.

main

X

Output artifact format

Choose the output artifact format.

☒ CodePipeline default

AWS CodePipeline uses the default zip format for artifacts in the pipeline. Does not include Git metadata about the repository.

☐ Full clone

AWS CodePipeline passes metadata about the repository that allows subsequent actions to do a full Git clone. Only supported for AWS CodeBuild actions. [Learn more](#)

☒ Enable automatic retry on stage failure

Webhook events

Webhook - optional

☒ Start your pipeline on push and pull request events.

Webhook event filters - optional



Starts your pipeline on a specific event.

Remove filters

Cancel

Previous

Next

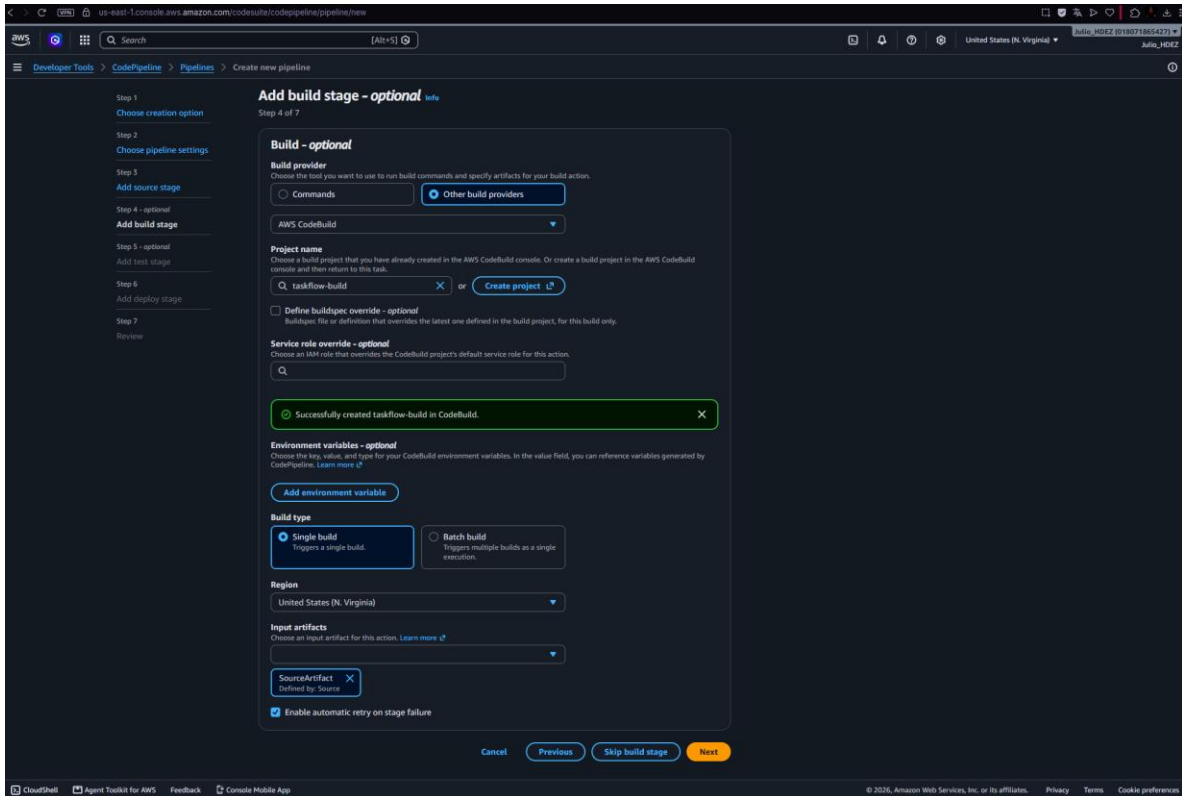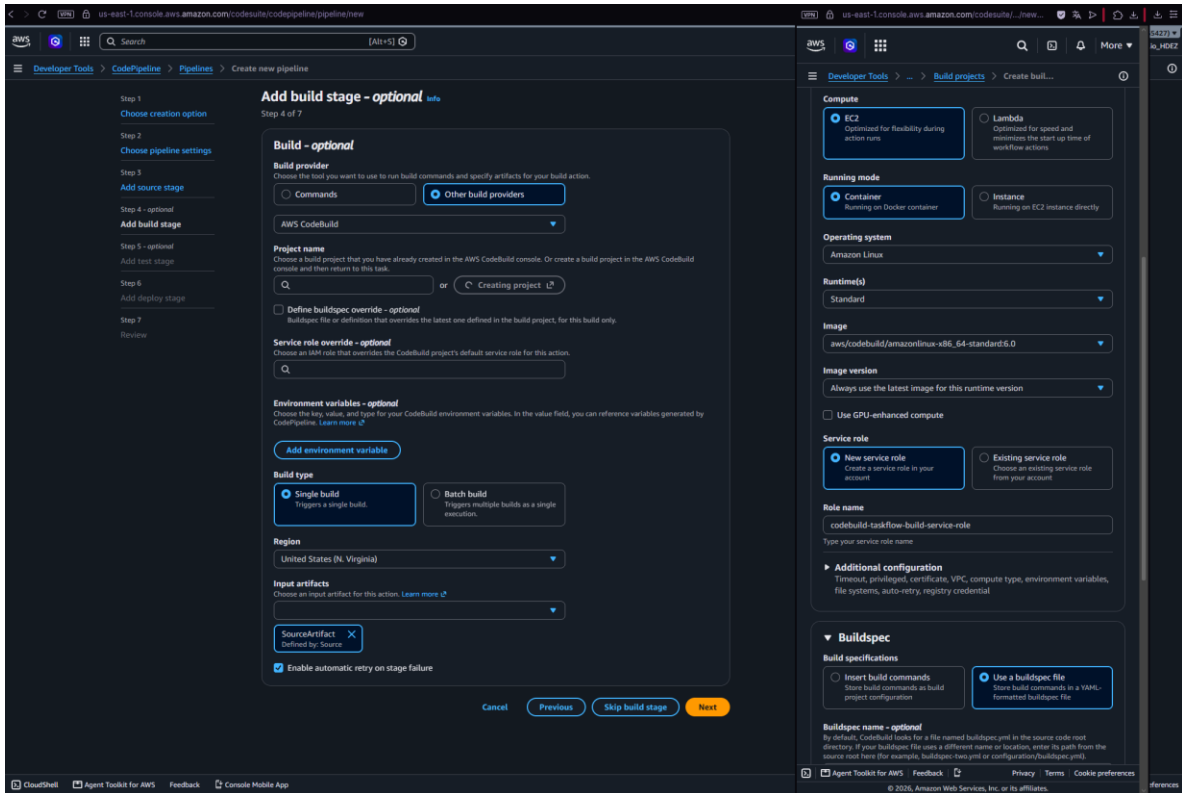

[Alt+S]

United States (N. Virginia)

Julio_HDEZ (018071865427)

Julio_HDEZ

ate new pipeline

Review

info

Step 7 of 7

Step 2: Choose pipeline settings

Pipeline settings

Pipeline name

taskflow-pipeline

Pipeline type

V2

Execution mode

QUEUED

Artifact location

taskflow-artefactos-jdherandez04

Service role name

AWSCodePipelineServiceRole-us-east-1-taskflow-pipeline

Step 3: Add source stage

Source action provider

Source action provider

GitHub (via GitHub App)

OutputArtifactFormat

CODE_ZIP

DetectChanges

true

ConnectionArn

arn:aws:codeconnections:us-east-1:018071865427:connection/fce4e5b6-e009-4bcc-8f19-61f3e105ca94

FullRepositoryId

JDHernandez04/taskflow-aws-JulioHdez

Default branch

main

Enable automatic retry on stage failure

Enabled

Trigger configuration

You can add additional pipeline triggers after the pipeline is created.



Trigger type

No filter

Error Programado en el Deploy del Pipeline:

The screenshot displays the AWS CodePipeline console for a pipeline named 'taskflow-pipeline'. A green success banner at the top states: 'Success: Congratulations! The pipeline taskflow-pipeline has been created.' Below this, the pipeline is visualized in a horizontal layout. It consists of three stages: 'Source', 'Build', and 'Deploy'. The 'Source' stage is green and shows 'Source: ci buildspec, appspec, hooks y taskflow.service' with a 'Source' action using 'GitHub (via GitHub App)' provider. The 'Build' stage is red, indicating a failure, with the message '1 of 1 action failed.' and a 'Build' action using the 'AWS CodeBuild' provider. The 'Deploy' stage is green and shows a 'Deploy' action using the 'AWS CodeDeploy' provider. The console interface includes tabs for 'Pipeline', 'Executions', 'Triggers', 'Settings', and 'Tags'. On the right, there are buttons for 'Edit', 'Stop execution', 'Create trigger', 'Clone pipeline', and 'Release change'. The top navigation bar shows the AWS logo, a search bar, and the region 'United States (N. Virginia)'.

Añadiendo permisos al IAM role:

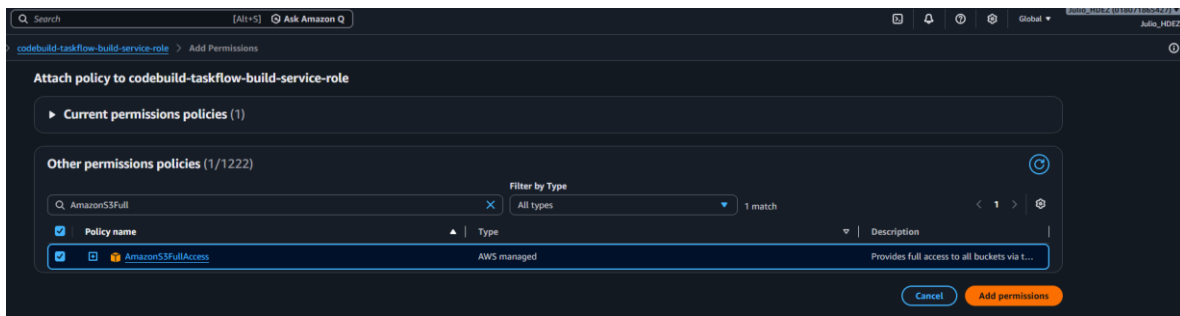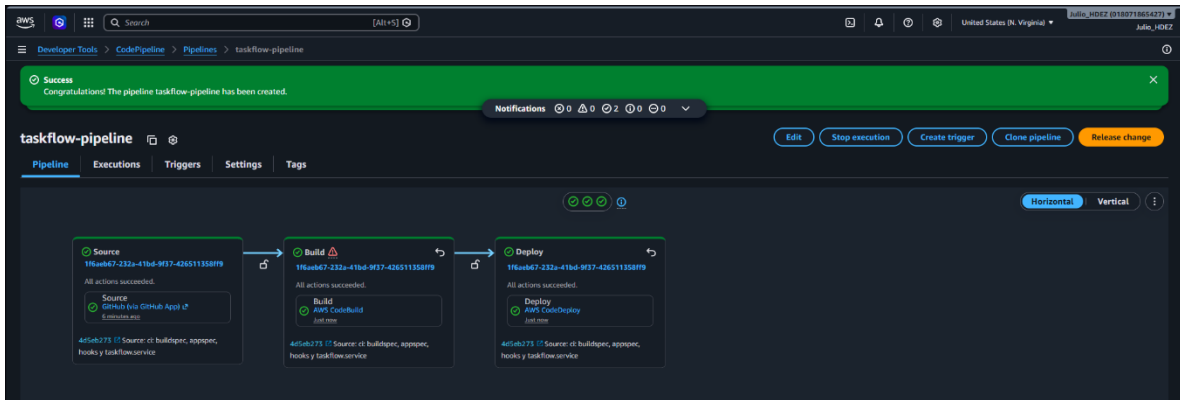

Code Pipeline desplegado con éxito:

