



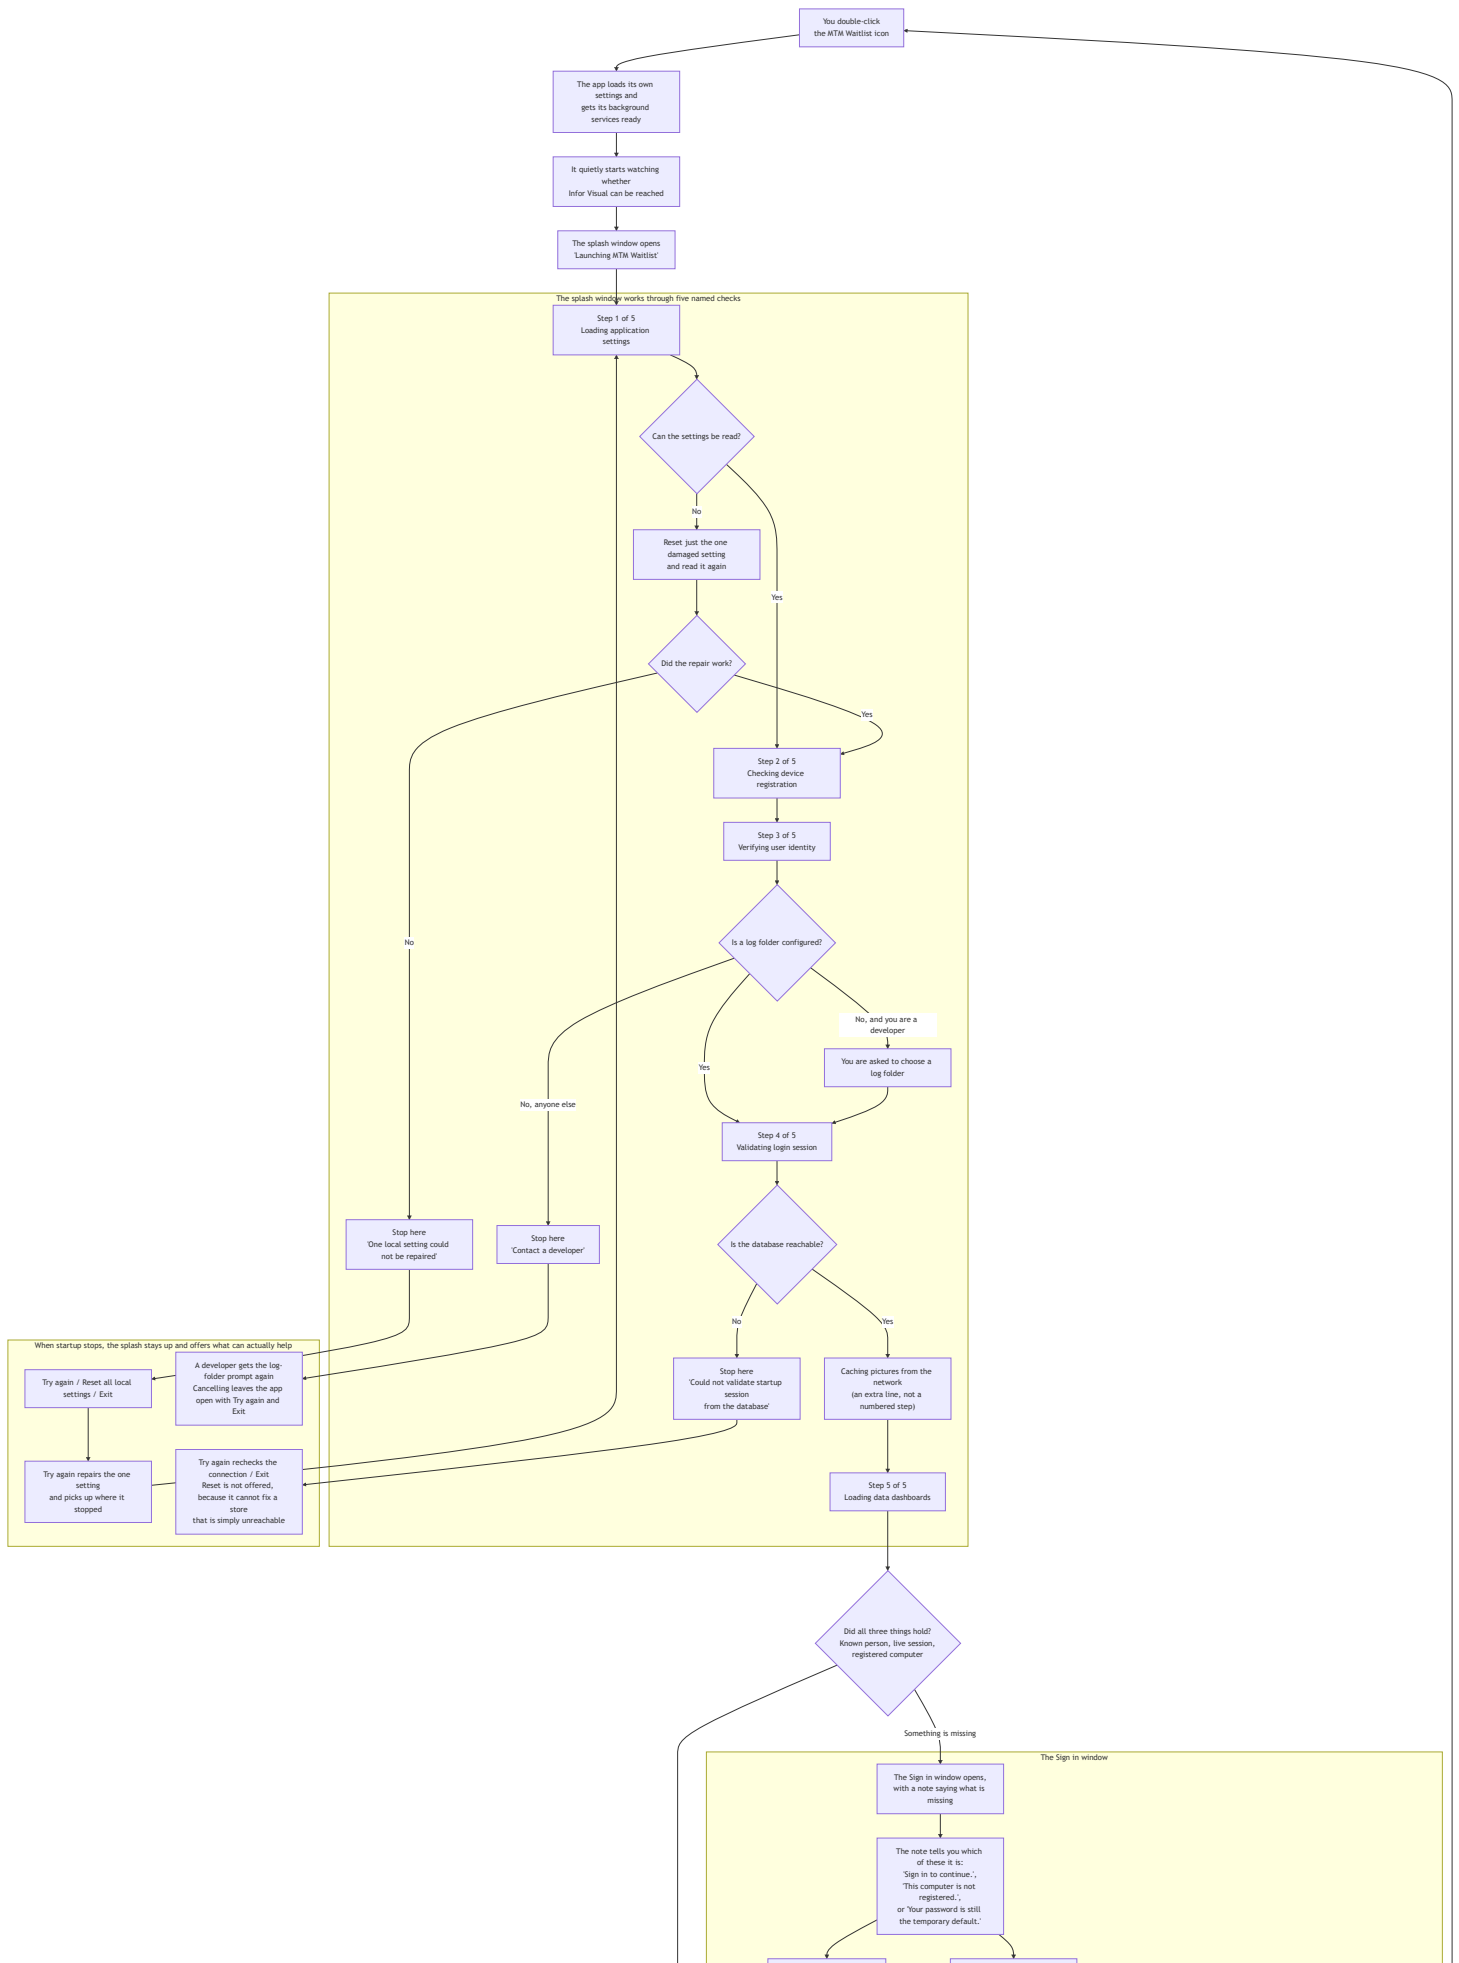

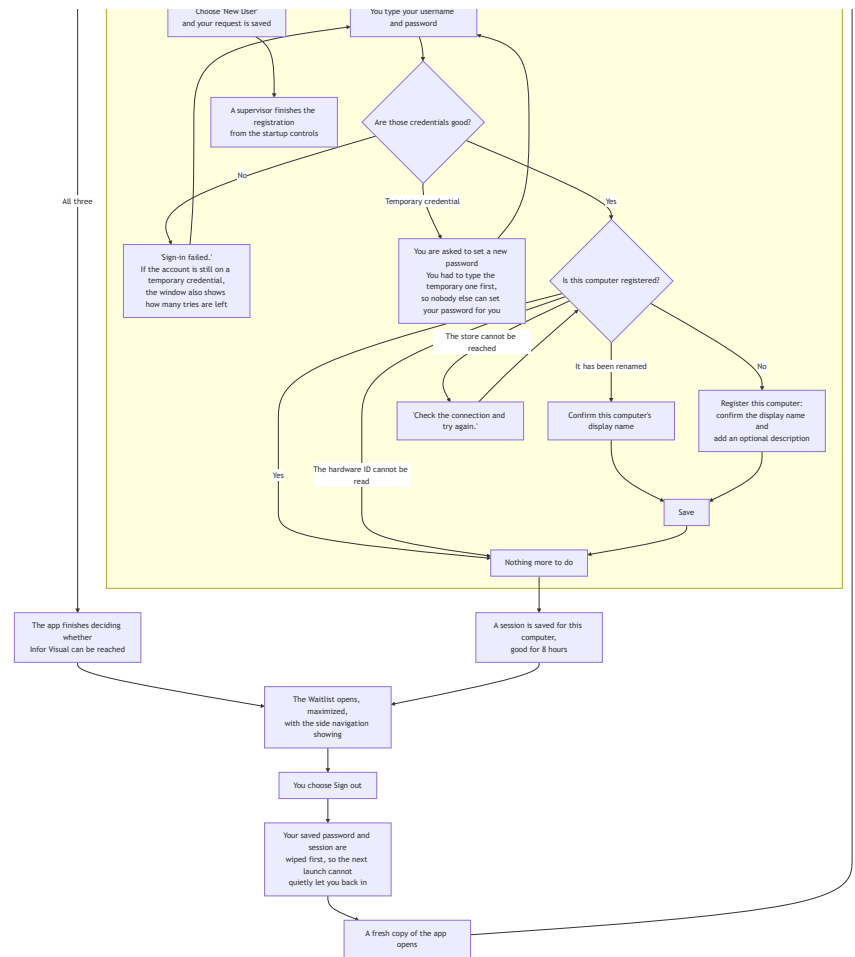

The short version

1. The app loads its settings and gets its services ready, then opens a small splash window.
2. The splash works through five named checks: settings, this device, who you are, your session, and the data screens. Copying the pictures the app draws happens along the way, between the session check and the last step.
3. If everything holds — you are known, your session is still good, and this computer is registered — you go straight into the Waitlist. No sign-in.
4. Otherwise you get the Sign in window, and the note on it tells you exactly what is missing instead of leaving you to guess.
5. If a check cannot be satisfied at all, the splash stays put and offers only the fixes that could actually work: Try again, Reset all local settings, or Exit.
6. Signing out ends the session properly: your saved credentials and session are erased before a fresh copy of the app starts, so the next launch begins from step 1 with nothing carried over.

Why some failures offer "Reset" and others do not

Resetting local settings can only repair something stored on this computer. When the store itself cannot be reached, the app offers Try again instead — because telling you to reset settings for a problem they cannot fix would send you down a dead end.

Why you are let in when the hardware ID cannot be read

If the app cannot read a stable hardware address for this computer, the registration check cannot be performed at all. An unreadable fact is not a failed check, so you are admitted rather than blocked on something the app was unable to look at.