

How do experiences of violence affect women’s preferences for facial masculinity according to resource availability? An exploratory study using eye-tracking

Code and analyses

Milena Vásquez-Amézquita <sup>1,3,\*</sup>      Andrés Castellanos-Chacón <sup>2</sup>  
Wendy Medina-Sarmiento<sup>1</sup>      Valentina Cepeda<sup>1</sup>      Marina Begoña Martínez-González <sup>3</sup>  
Juan David Leongómez <sup>2</sup>

18 September, 2024

<sup>1</sup> Faculty of Psychology, Universidad El Bosque, Bogota, Colombia.  
<sup>2</sup> EvoCo: Human Behaviour and Evolution Lab, Faculty of Psychology, Universidad El Bosque, Bogota, Colombia  
<sup>3</sup> Faculty of Psychology, Universidad de la Costa, Barranquilla, Colombia.  
\* Correspondence: [mvasquezam@unbosque.edu.co](mailto:mvasquezam@unbosque.edu.co)

Description

This document contains all code, and step by step explanations for all analyses, figures and tables (including supplementary figures and tables) for:

Vásquez-Amézquita, M., Castellanos-Chacón, A., Medina-Sarmiento, W., Cepeda, V., Martínez-González, M. B., & Leongómez, J. D., (in prep). *How do experiences of violence affect women’s preferences for facial masculinity according to resource availability? An exploratory study using eye-tracking.*

Data available from the Open Science Framework (OSF): <https://doi.org/10.XXXXXX/OSF.IO/XXXXX>. All analyses were planned by Milena Vásquez-Amézquita and Juan David Leongómez. This document and its underlying code were created in R **Markdown** by Juan David Leongómez using **L<sup>A</sup>T<sub>E</sub>X**.

Contents

<b>1 Preliminaries</b>	<b>2</b>
1.1 Load packages	2
1.2 Custom functions	3
1.2.1 <code>pval.lev</code>	3
1.2.2 <code>corr.stars</code>	3
1.3 Independent stimuli evaluation	4
1.3.1 Masculinity ratings	4
1.3.2 Age ratings	6
1.3.2.1 Histogram of perceived age	6
1.4 Load and wrangle main experiment data	7
1.4.1 Individual databases (by data type/source)	7
1.4.1.1 Eye-tracking data	8
1.4.1.2 Questionnaires	8
1.4.1.2.1 Principal component analysis (PCA)	13

1.4.1.2.2	Clean questionnaire data . . . . .	17
1.4.1.3	Subjective evaluation of stimuli . . . . .	18
1.4.1.3.1	Wide format . . . . .	18
1.4.1.3.2	Long format . . . . .	19
1.4.1.4	Resource availability . . . . .	20
1.4.2	Full, final database . . . . .	20
1.4.2.1	Join data files . . . . .	20
1.4.2.2	Filtered database . . . . .	20
1.4.3	Final individual databases filtered to the final sample . . . . .	20
1.4.3.1	Resource availability (filtered) . . . . .	20
1.4.3.2	Questionnaires (filtered) . . . . .	21
<b>2</b>	<b>Descriptives</b>	<b>21</b>
2.1	Number and age of participants in each condition . . . . .	21
2.2	Select and wrangle data for descriptive plots . . . . .	21
2.3	Distribution of values across variables . . . . .	23
2.3.1	Sociodemographic variables . . . . .	23
2.3.2	Access to resources . . . . .	24
2.3.3	Health-related variables . . . . .	25
2.3.4	Food security . . . . .	26
2.3.5	Hormonal variables . . . . .	28
2.3.6	Self-perceived conditions . . . . .	29
2.3.7	Last partner perception . . . . .	30
2.3.8	Context violence . . . . .	31
2.3.9	Gender and partner violence . . . . .	33
2.3.10	Subjective evaluation of stimuli . . . . .	34
2.4	Correlations . . . . .	35
2.4.1	Correlations in partner perceptions . . . . .	35
2.4.2	Correlations table (general) . . . . .	36
2.4.3	Correlations table (fixations, subjective evaluations and violence) . . . . .	39
<b>3</b>	<b>Session info (for reproducibility)</b>	<b>41</b>
<b>4</b>	<b>Supplementary references</b>	<b>41</b>

# 1 Preliminaries

## 1.1 Load packages

This file was created using `knitr` (Xie, 2014), mostly using `tidyverse` (Wickham et al., 2019) syntax. As such, data wrangling was mainly done using packages such as `dplyr` (Wickham et al., 2023), and most figures were created or modified using `ggplot2` (Wickham, 2016). Tables were created using `knitr::kable` and `kableExtra` (Zhu, 2020).

Linear mixed models were fitted using `lmerTest` (Kuznetsova et al., 2017), assumptions were performed using `performance` (Lüdtke et al., 2021), contrasts and interactions were explored using `emmeans` (Lenth, 2024).

Used packages also include `osfr` (Wolen et al., 2020) to download and open data files directly from the Open Science Framework (OSF), using the `osf_retrieve_file` and `osf_download` functions.

All packages used in this file can be directly installed from the Comprehensive R Archive Network (CRAN). For a complete list of packages used to create this file, and their versions, see section 3, at the end of the document.

```
library(car)
library(MASS)
library(ggstats)
library(tidyverse)
library(ggpubr)
```

```
library(readxl)
library(lmerTest)
library(emmeans)
library(knitr)
library(kableExtra)
library(performance)
library(GGally)
library(scales)
library(factoextra)
library(FactoMineR)
library(gtools)
library(bbmle)
library(effectsize)
```

## 1.2 Custom functions

### 1.2.1 pval.lev

This function takes p-values and formats them in L<sup>A</sup>T<sub>E</sub>X, highlighting significant results in bold.

```
# Define a function 'pval.lev' to format p-values based on specific thresholds.
pval.lev <- function(pvals) {
  # If the p-value is less than 0.0001, return the string '\textbf{< 0.0001}'.
  ifelse(pvals < 0.0001,
    "\\textbf{< 0.0001}",
    # If the p-value is less than 0.001, return the string '\textbf{< 0.001}'.
    ifelse(pvals < 0.001,
      "\\textbf{< 0.001}",
      # If the p-value is less than 0.05, format it with bold text and round to 4
      # decimal places.
      ifelse(pvals < 0.05,
        paste0("\\textbf{", round(pvals, 4), "}"),
        # Otherwise, round the p-value to 2 decimal places.
        round(pvals, 2)
      )
    )
  )
}
```

### 1.2.2 corr.stars

This function creates a correlation matrix, and displays significance (function `corr.stars` modified from <http://myowelt.blogspot.com/2008/04/beautiful-correlation-tables-in-r.html>).

```
corr.stars <- function(x) {
  # Load the 'Hmisc' package, which is required for the 'rcorr' function.
  require(Hmisc)
  # Convert the input 'x' to a matrix in case it is not already.
  x <- as.matrix(x)
  # Compute the correlation matrix (R) and p-values (p) using the 'rcorr' function.
  R <- rcorr(x)$r # Correlation matrix
  p <- rcorr(x)$P # p-value matrix
  # Define significance levels for the stars notation.
  # *** for p < 0.001, ** for p < 0.01, * for p < 0.05, and † for p < 0.10.
  mystars <- ifelse(p < .001,
    paste0("\\textbf{", round(R, 2), "***}"),
    ifelse(p < .01,

```

```

    paste0("\\textbf{", round(R, 2), "**}"),
  ifelse(p < .05,
    paste0("\\textbf{", round(R, 2), "*}"),
    ifelse(p < .10,
      paste0(round(R, 2), "${\\dagger}$"),
      format(round(R, 2), nsmall = 2)
    )
  )
)
)
)
# Build a new matrix 'Rnew' that contains the correlations and their significance stars.
Rnew <- matrix(mystars,
  ncol = ncol(x)
) # Ensure the new matrix has the same number of columns as 'x'
# Add the correlation values without stars to the diagonal (self-correlations).
diag(Rnew) <- paste(diag(R), " ",
  sep = ""
)
# Set row names and column names of the matrix 'Rnew' to match those of the original matrix.
rownames(Rnew) <- colnames(x)
colnames(Rnew) <- paste(colnames(x), "", sep = "")
# Remove the upper triangle and the diagonal of the matrix to avoid duplication.
Rnew <- as.matrix(Rnew)
Rnew[upper.tri(Rnew, diag = TRUE)] <- ""
# Convert the matrix to a data frame for easier handling.
Rnew <- as.data.frame(Rnew)
# Remove the last column (empty column from the upper triangle) and return the result.
Rnew <- cbind(Rnew[1:length(Rnew) - 1])
# Return the final correlation matrix with significance stars.
return(Rnew)
}

```

### 1.3 Independent stimuli evaluation

The sex typicality of all stimuli was manipulated to either enhance or reduce their sex-typical characteristics. Since all the stimuli were male faces, this involved masculinizing them to increase their typical sex characteristics and feminizing them to reduce those characteristics. Masculinized and feminized versions were independently rated for masculinity and estimated age by a panel of raters (not participants).

```

# Load the 'Evaluacion Manipulación Rostros.xlsx' Excel file into a data frame
ext_val <- read_excel("Data/Evaluacion Manipulación Rostros.xlsx")

```

#### 1.3.1 Masculinity ratings

First, masculinity rating given to the masculinized and feminized versions of each stimuli were compared.

```

# Select relevant columns and reshape the data into long format
masc_dat <- ext_val |>
  select(
    ResponseId,
    contains("M", ignore.case = FALSE), # Select columns that contain "M" (masculinity)
    ~Menstruacion
  ) |> # Exclude the 'Menstruacion' (menstruation) column
  pivot_longer(
    cols = contains("M", ignore.case = FALSE), # Reshape to long format
    names_to = "Stimulus", # Column with stimuli names
    values_to = "Masculinity"
  )

```

```

) |> # Column with masculinity ratings
# Add a column indicating sexual dimorphism based on stimulus name
mutate(Sexual_dimorphism = ifelse(grepl("f_1", Stimulus), "Feminine", "Masculine")) |>
# Keep only the first 3 characters of the stimulus name
mutate(Stimulus = str_sub(Stimulus, end = 3))

# Group by stimulus and perform t-tests for masculinity ratings across
# sexual dimorphism categories
t_masc <- masc_dat |>
  group_by(Stimulus) |>
  summarise(
    t = round(t.test(Masculinity ~ Sexual_dimorphism)$statistic, 2), # Compute t values
    p = pval.lev(t.test(Masculinity ~ Sexual_dimorphism)$p.value)
  ) |> # Compute p-value
  ungroup()

# Select the first 10 rows of the data 't_masc'
t_masc[1:10, ] |>
# Add the next 10 rows (11 to 20) as additional columns
cbind(t_masc[11:20, ]) |>
# Add the next 10 rows (21 to 30) as additional columns
cbind(t_masc[21:30, ]) |>
# Create a table using the 'kable' function
kable(
  booktabs = TRUE, # Use 'booktabs' style for better-looking tables in LaTeX
  digits = 2, # Round numerical values to 2 decimal places
  align = "c", # Center align all columns
  linesep = "", # No lines between rows
  caption = "Difference in independent masculinity ratings given to each stimulus,
    according to its sexual dimorphism manipulation (feminized - masculinized)",
  # Caption for the table
  escape = FALSE, # Allow LaTeX commands in the table (e.g., italic or bold)
  col.names = rep(c("Stimulus", "\\textit{t}", "\\textit{p}"), times = 3) # Column names
) |>
# Apply additional LaTeX styling to the table using 'kable_styling'
kable_styling(
  latex_options = c("HOLD_position", "scale_down") # Keep table position
) |>
# Add vertical lines after the 3rd and 6th columns using 'column_spec'
column_spec(c(3, 6), border_right = TRUE) |>
# Add a footnote with specific formatting
footnote(
  general = "Tests are Welch's \\textit{t}-test. Significant results are in bold.",
  # General footnote text with LaTeX formatting
  threeparttable = TRUE, # Enable three-part table for better layout
  footnote_as_chunk = TRUE, # Render footnote as a chunk
  escape = FALSE # Allow LaTeX commands in the footnote
)

```

**Table S1.** Difference in independent masculinity ratings given to each stimulus, according to its sexual dimorphism manipulation (feminized - masculinized)

Stimulus	<i>t</i>	<i>p</i>	Stimulus	<i>t</i>	<i>p</i>	Stimulus	<i>t</i>	<i>p</i>
A01	-6.09	< <b>0.0001</b>	A11	-6.98	< <b>0.0001</b>	A21	-7.81	< <b>0.0001</b>
A02	-9.05	< <b>0.0001</b>	A12	-7.90	< <b>0.0001</b>	A22	-10.53	< <b>0.0001</b>
A03	-8.96	< <b>0.0001</b>	A13	-10.32	< <b>0.0001</b>	A23	-6.83	< <b>0.0001</b>
A04	-8.04	< <b>0.0001</b>	A14	-7.76	< <b>0.0001</b>	A24	-6.61	< <b>0.0001</b>
A05	-9.81	< <b>0.0001</b>	A15	-10.33	< <b>0.0001</b>	A25	-8.18	< <b>0.0001</b>
A06	-7.45	< <b>0.0001</b>	A16	-10.63	< <b>0.0001</b>	A26	-8.60	< <b>0.0001</b>
A07	-7.04	< <b>0.0001</b>	A17	-7.76	< <b>0.0001</b>	A27	-6.55	< <b>0.0001</b>
A08	-9.05	< <b>0.0001</b>	A18	-10.29	< <b>0.0001</b>	A28	-7.79	< <b>0.0001</b>
A09	-12.18	< <b>0.0001</b>	A19	-8.27	< <b>0.0001</b>	A29	-11.25	< <b>0.0001</b>
A10	-6.53	< <b>0.0001</b>	A20	-9.72	< <b>0.0001</b>	A30	-11.47	< <b>0.0001</b>

Note: Tests are Welch's *t*-test. Significant results are in bold.

### 1.3.2 Age ratings


Then, estimated age of stimuli was assessed.

```
# Process age-related data: select relevant columns and reshape into long format
age_dat <- ext_val |>
  select(
    ResponseId,
    contains("E", ignore.case = FALSE)
  ) |> # Select columns related to estimated age (E)
select(-c(2:5)) |> # Exclude columns 2 to 5 (irrelevant for this analysis)
pivot_longer(
  cols = contains("E", ignore.case = FALSE), # Reshape to long format
  names_to = "Stimulus", # Column with stimuli names
  values_to = "Age"
) |> # Column with age estimates
# Add sexual dimorphism category based on stimulus name
mutate(Sexual_dimorphism = ifelse(grepl("f_1", Stimulus), "Feminine", "Masculine")) |>
# Keep only the first 3 characters of the stimulus name
mutate(Stimulus = str_sub(Stimulus, end = 3))

# Summarize age data: compute mean, standard deviation, minimum, and maximum age
sum_age_dat <- age_dat |>
  summarise(
    Mean = mean(Age, na.rm = TRUE), # Mean age
    SD = sd(Age, na.rm = TRUE), # Standard deviation of age
    Min = min(Age, na.rm = TRUE), # Minimum age
    Max = max(Age, na.rm = TRUE)
  ) # Maximum age
```

#### 1.3.2.1 Histogram of perceived age Distribution of the estimated ages.

```
# Create a histogram of estimated age
ggplot(age_dat, aes(x = Age)) +
  geom_histogram(bins = 26, fill = "#6D9EC1", color = "black") + # Plot histogram with 26 bins
  labs(
    x = "Estimated Age", # X-axis label
    y = "Count"
  ) + # Y-axis label
  scale_x_continuous(breaks = seq(15, 40, 5)) # X-axis scale with breaks every 5 units
```

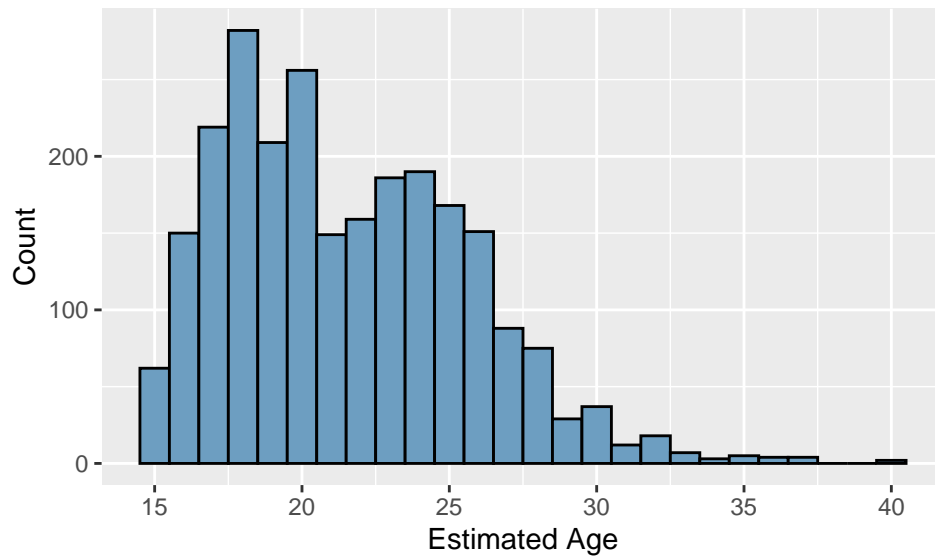

**Figure S1.** Histogram of estimated age of stimuli by an independent panel of raters. Age estimations were between 15 and 40 with a mean of  $21.53 \pm 4.11$ .

## 1.4 Load and wrangle main experiment data

### 1.4.1 Individual databases (by data type/source)

```
# Load the 'CUC-UB' sheet from the 'BD-ET-CUC-UB.xlsx' dataset
dat_et <- read_excel("Data/BD-ET-CUC-UB.xlsx",
  sheet = "CUC-UB"
) |>
# Drop unused columns
select(-c(
  Participant, Condicion, TOI, Interval, Media_respuesta, AOI,
  AOI_Global, Respuesta, Number_of_mouse_clicks...17,
  Time_to_first_mouse_click...18, AOI_respuesta
)) |>
# Rename columns (to English)
rename(
  ID = Recording,
  University = UNIVERSIDAD,
  Stimulus = Media,
  Condition = Condición,
  Relationship = Contexto,
  Sexual_dimorphism = Rostro,
  TFD = Total_duration_of_whole_fixations,
  NF = Number_of_whole_fixations,
  TFF = Time_to_first_whole_fixation,
  NMC = Number_of_mouse_clicks...21,
  TFMC = Time_to_first_mouse_click...22,
  DFF = Duration_first_fixation
) |>
# Convert character columns to factors
mutate(across(where(is.character), as.factor)) |>
# Recode factor levels to more meaningful English labels
mutate(
  Condition = fct_recode(Condition,
```

```

    "Low" = "BAJA",
    "High" = "ALTA"
  ),
  Relationship = fct_recode(Relationship,
    "Short term" = "CP",
    "Long term" = "LP"
  ),
  Sexual_dimorphism = fct_recode(Sexual_dimorphism,
    "Feminized" = "Feminizado",
    "Masculinized" = "Masculinizado"
  )
) |>
# Modify 'Stimulus' column to include 'F' for Feminized and 'M' for Masculinized
mutate(
  Stimulus = ifelse(Sexual_dimorphism == "Feminized",
    paste0(str_sub(str_replace(Stimulus, ".* - ", ""), 1, 2), "F"),
    ifelse(Sexual_dimorphism == "Masculinized",
      paste0(str_sub(str_replace(Stimulus, ".* - ", ""), 1, 2), "M"),
      Stimulus
    )
  ),
  # Create a new column 'Choice' to indicate whether there was a mouse click
  Choice = ifelse(NMC == 0, "No", "Yes")
)

```

#### 1.4.1.1 Eye-tracking data

**1.4.1.2 Questionnaires** This was loaded without calculating total instrument scores (for now), to test internal consistency

```

quests <- read_excel("Data/Cuestionario Datos Sociodemográficos (Disponibilidad) (respuestas) (1).xlsx",
  sheet = "Respuestas de formulario 1"
) |>
# Drop unnecessary columns (such as 'Invitado', 'Servicios ayuda', and 'Correos cierre')
select(-c(Invitado, `Servicios ayuda`, `Correos cierre`)) |>
# Rename columns for better readability
rename(
  Date = Fecha,
  Age = edad,
  City = Ciudad,
  Education = Escolaridad,
  Ethnicity = Etnia,
  Gender = Sexo,
  Sex = Genero,
  Sexual_orientation = OS,
  Relationship_current = "Pareja actual",
  Relationship_duration = DuracionR,
  Relationship_status = EstadoR,
  Partner_sex = SexoParejaActual,
  Partner_masculinity = Masculinidad_pareja,
  Partner_dominance = Dominancia_pareja,
  Partner_attractiveness = Atractivo_pareja,
  Number_of_children = NumHijos,
  Hormonal_contraception = "Anticonceptivos hormonales",
  Contraceptive = Cual_anticonceptivo,
  Last_menstruation = "Ultima menstruacion",
  Currently_pregnant = "Embarazo actual",

```



```

Sexual_abuse = "Experiencia abuso sexual",
Comments = comentarios1,
Medical_history = "antecedentes medicos",
SP_happiness = "AP felicidad",
SP_financial_security = "AP seguridad economica",
SP_money_control = "AP control dinero",
SP_attractiveness = "AP atractivo",
SP_self_confidence = "AP autoconfianza",
SP_self_esteem = "AP autoestima",
SP_health = "AP salud",
Electricity = "SB electricidad",
Internet_access = "SB internet",
TV = "SB television",
Internet_use = "Fr acceso internet",
Hospital_access = "Acceso hospital",
Freq_illness = "Fr enfermedades",
Socioeconomic_level = "Estrato socioeconomico",
Neighborhood = "Barrio de residencia",
Perceived_neighborhood_safety = "Seguridad barrio",
Perceived_city_safety = "Seguridad ciudad",
Perceived_home_safety = "Seguridad hogar",
Perceived_country_safety = "Seguridad país",
Freq_robbery = "Fr de robos",
Men_perceived_as_danger_to_children = "Hombres peligrosos hijos",
Men_perceived_as_danger_to_partner = "Hombres peligrosos pareja",
Partner_physical_violence = "VP fisica",
Freq_partner_physical_violence = "Fr VP fisica",
Partner_sexual_violence = "VP sexual",
Freq_partner_sexual_violence = "Fr VP sexual",
Partner_infidelity = "Infidelidad",
Freq_partner_infidelity = "Fr infidelidad",
Victim_of_violence = "Victima de alguna violencia",
Violence_type = "Tipo violencia",
Victim_of_gender_violence = "Victima violencia género",
Victim_of_armed_conflict = "Victima conflicto armado",
Control_question_1 = "Sin leer",
Control_question_2 = "Broma"
) |>
# Recode the factor levels of several categorical variables
mutate(
  Education = factor(Education, levels = c(
    "Primaria",
    "Bachillerato",
    "Universitario",
    "Posgrado"
  )),
  Sexual_orientation = factor(Sexual_orientation,
    levels = c(
      "Exclusivamente heterosexual",
      "Principalmente heterosexual, con contactos homosexuales esporádicos",
      "Predominantemente heterosexual, aunque con contactos homosexuales más que esporádicos",
      "Bisexual",
      "Pansexual",
      "Demisexual"
    )
  ),

```

```

Relationship_status = factor(Relationship_status,
  levels = c(
    "Soltero sin contactos sexuales en el último año",
    "Soltero con contactos sexuales en el último año",
    "Relación exclusiva o matrimonio - viven juntos",
    "Relación exclusiva - no viven juntos",
    "Relación no exclusiva - contactos sexuales con otras personas"
  )
),
Internet_use = factor(Internet_use,
  levels = c("Cada día", "Cada mes", "Cada año")
),
Socioeconomic_level = as.factor(Socioeconomic_level)
) |>
# Recode City variable to simplify geographical information
mutate(City = ifelse(City %in% c(
  "Bogotá D.C.", "Madrid, Cundinamarca", "Zipaquirá, Cundinamarca",
  "Zipaquirá", "Mosquera, cundinamarca", "Mosquera",
  "FUNZA, CUNDINAMARCA", "Madrid Cundinamarca", "Une- Cundinamarca"
),
  "Bogota Region",
  ifelse(City %in% c(
    "Soledad", "Barranquilla", "BARRANQUILLA",
    "Soledad, Atlantico", "Costa Atlantica", "Corozal"
  ),
    "Atlantico Region",
    "Other"
  )
)) |>
# Recode several factors from Spanish to English for easier interpretation
mutate(Education = recode(Education,
  "Primaria" = "Primary school",
  "Bachillerato" = "High school",
  "Universitario" = "University",
  "Posgrado" = "Postgraduate"
)) |>
# Additional recoding of variables
mutate(Sexual_orientation = recode(Sexual_orientation,
  "Exclusivamente heterosexual" =
    "Exclusively heterosexual",
  "Principalmente heterosexual, con contactos homosexuales esporádicos" =
    "Predominantly heterosexual",
  "Predominantemente heterosexual, aunque con contactos homosexuales más que esporádicos" =
    "Predominantly heterosexual, but more than incidentally homosexual",
  "Bisexual" = "Bisexual",
  "Pansexual" = "Pansexual",
  "Demisexual" = "Demisexual"
)) |>
mutate(Relationship_status = recode(Relationship_status,
  "Soltero sin contactos sexuales en el último año" =
    "Single without sexual contacts",
  "Soltero con contactos sexuales en el último año" =
    "Single with sexual contacts",
  "Relación exclusiva o matrimonio - viven juntos" =
    "Exclusive relationship - cohabitating",
  "Relación exclusiva - no viven juntos" =

```

```

    "Exclusive relationship - not cohabitating",
    "Relación no exclusiva - contactos sexuales con otras personas" =
    "Non-exclusive relationship"
  )) |>
  mutate(Internet_use = recode(Internet_use,
    "Cada día" = "Daily",
    "Cada mes" = "Monthly",
    "Cada año" = "Yearly"
  )) |>
  # Recode several questions related to danger perceptions, replacing Spanish responses with
  # numerical values.
  mutate(across(
    starts_with("Men_perceived_as_danger_to_"),
    ~ recode(.,
      "Completamente en desacuerdo" = 1,
      "Ligeramente en desacuerdo" = 2,
      "Ni de acuerdo ni en desacuerdo" = 3,
      "Ligeramente de acuerdo" = 4,
      "Completamente de acuerdo" = 5
    )
  )) |>
  # Replace Spanish responses with corresponding English values
  mutate(across(where(is.character), ~ replace(
    ., . ==
      "Si",
      "Yes"
  ))) |>
  mutate(across(where(is.character), ~ replace(
    ., . ==
      "Sí",
      "Yes"
  ))) |>
  mutate(across(where(is.character), ~ replace(
    ., . ==
      "No quiero responder",
      "Prefer not to answer"
  ))) |>
  mutate(across(where(is.character), ~ replace(
    ., . ==
      "Mujer",
      "Woman"
  ))) |>
  mutate(across(where(is.character), ~ replace(
    ., . ==
      "Hombre",
      "Man"
  ))) |>
  mutate(across(where(is.character), ~ replace(
    ., . ==
      "Femenino",
      "Female"
  ))) |>
  mutate(across(where(is.character), ~ replace(
    ., . ==
      "Masculino",
      "Male"
  )))

```

```

))) |>
mutate(across(where(is.character), ~ replace(
  ., . ==
    "Sin pareja actual",
    "Single"
))) |>
mutate(across(where(is.character), ~ replace(
  ., . ==
    "Sí, una vez en la adultez",
    "Once as adult"
))) |>
mutate(across(where(is.character), ~ replace(
  ., . ==
    "Sí, tanto en la infancia como en la adultez",
    "Both as child and adult"
))) |>
mutate(across(where(is.character), ~ replace(
  ., . ==
    "Sí, más de una vez en mi infancia",
    "More than once as child"
))) |>
mutate(across(where(is.character), ~ replace(
  ., . ==
    "Sí, una vez e mi infancia",
    "Once as child"
))) |>
mutate(across(where(is.character), ~ replace(
  ., . ==
    "Afrocolombiano",
    "Afrocolombian"
))) |>
mutate(across(where(is.character), ~ replace(
  ., . ==
    "Desplazado conflicto armado",
    "Undetermined"
))) |>
mutate(across(where(is.character), ~ replace(
  ., . ==
    "Ninguna",
    "Undetermined"
))) |>
mutate(across(where(is.character), ~ replace(
  ., . ==
    "Comunidad negra",
    "Afrocolombian"
))) |>
mutate(across(where(is.character), ~ replace(
  ., . ==
    "Raizal del Archipiélago de San Andrés, Providencia y Santa Catalina",
    "Raizal"
))) |>
mutate(across(where(is.character), ~ replace(
  ., . ==
    "Patos",
    "Indigenous"
))) |>

```

```
mutate(across(where(is.character), ~ replace(
  ., . ==
    "Indígena",
    "Indigenous"
))) |>
mutate(across(where(is.character), ~ replace(
  ., . ==
    "No estoy segura",
    "Unsure"
)))
```

**1.4.1.2.1 Principal component analysis (PCA)** To test whether it was possible to reduce the number of socio-ecological variables, we performed PCAs using the package FactoMineR (Lê et al., 2008), and plotted its results with function from the package factoextra (Kassambara & Mundt, 2020).

Socio-ecological factors PCA

```
# Select relevant columns for PCA from the 'quests' dataset
quests_pca_gen <- quests |>
  select(
    ID, # Unique identifier
    Men_perceived_as_danger_to_partner,
    Men_perceived_as_danger_to_children,
    Freq_partner_physical_violence,
    Freq_partner_sexual_violence,
    Freq_partner_infidelity,
    Perceived_home_safety
  ) |>
# Rename columns: replace "Freq_" with "Frequency of"
rename_with(~ str_replace_all(., "Freq_", "Frequency of")) |>
# Replace underscores with spaces in column names
rename_with(~ str_replace_all(., "_", " ")) |>
# Capitalize the first letter of each column name
rename_with(~ str_to_sentence(.))

# Perform PCA on the selected variables (excluding the ID column)
pca_sef <- PCA(quests_pca_gen[, -1], graph = FALSE)

# Display summary of the PCA results
pca_sef$var$cor |>
# Create a table using the 'kable' function
kable(
  booktabs = TRUE, # Use 'booktabs' style for better-looking tables in LaTeX
  digits = 2, # Round numerical values to 2 decimal places
  align = "c", # Center align all columns
  linesep = "", # No lines between rows
  caption = "Correlation between variables and PCA dimensions",
  # Caption for the table
  escape = FALSE, # Allow LaTeX commands in the table (e.g., italic or bold)
) |>
# Apply additional LaTeX styling to the table using 'kable_styling'
kable_styling(
  latex_options = c("HOLD_position", "scale_down") # Keep table position
)
```

**Table S2.** *Correlation between variables and PCA dimensions*


	Dim.1	Dim.2	Dim.3	Dim.4	Dim.5
Men perceived as danger to partner	0.89	-0.27	-0.03	-0.13	0.01
Men perceived as danger to children	0.89	-0.25	-0.04	-0.11	0.03
Frequency of partner physical violence	0.37	0.63	0.20	0.15	-0.63
Frequency of partner sexual violence	0.31	0.42	-0.48	0.61	0.35
Frequency of partner infidelity	0.19	0.59	0.54	-0.32	0.48
Perceived home safety	0.05	-0.37	0.69	0.61	0.06

**Summary plot**

```

# Arrange two plots side by side:
# 1. A scree plot showing the explained variance for each principal component
# 2. A plot showing the variable loadings on the principal components
ggarrange(
  fviz_eig(pca_sef, addlabels = TRUE, barfill = "#00AFBB") +
    labs(
      title = "PCA: Socio-ecological factors", # Title for the scree plot
      subtitle = "Scree plot" # Subtitle for the scree plot
    ),
  fviz_pca_var(pca_sef,
    col.var = "#00AFBB", # Color the variable loadings in teal
    repel = TRUE # Avoid overlapping labels
  ) +
    labs(
      title = NULL, # No title for the loading plot
      subtitle = "Loadings" # Subtitle for the loading plot
    ),
  labels = "auto"
)

```

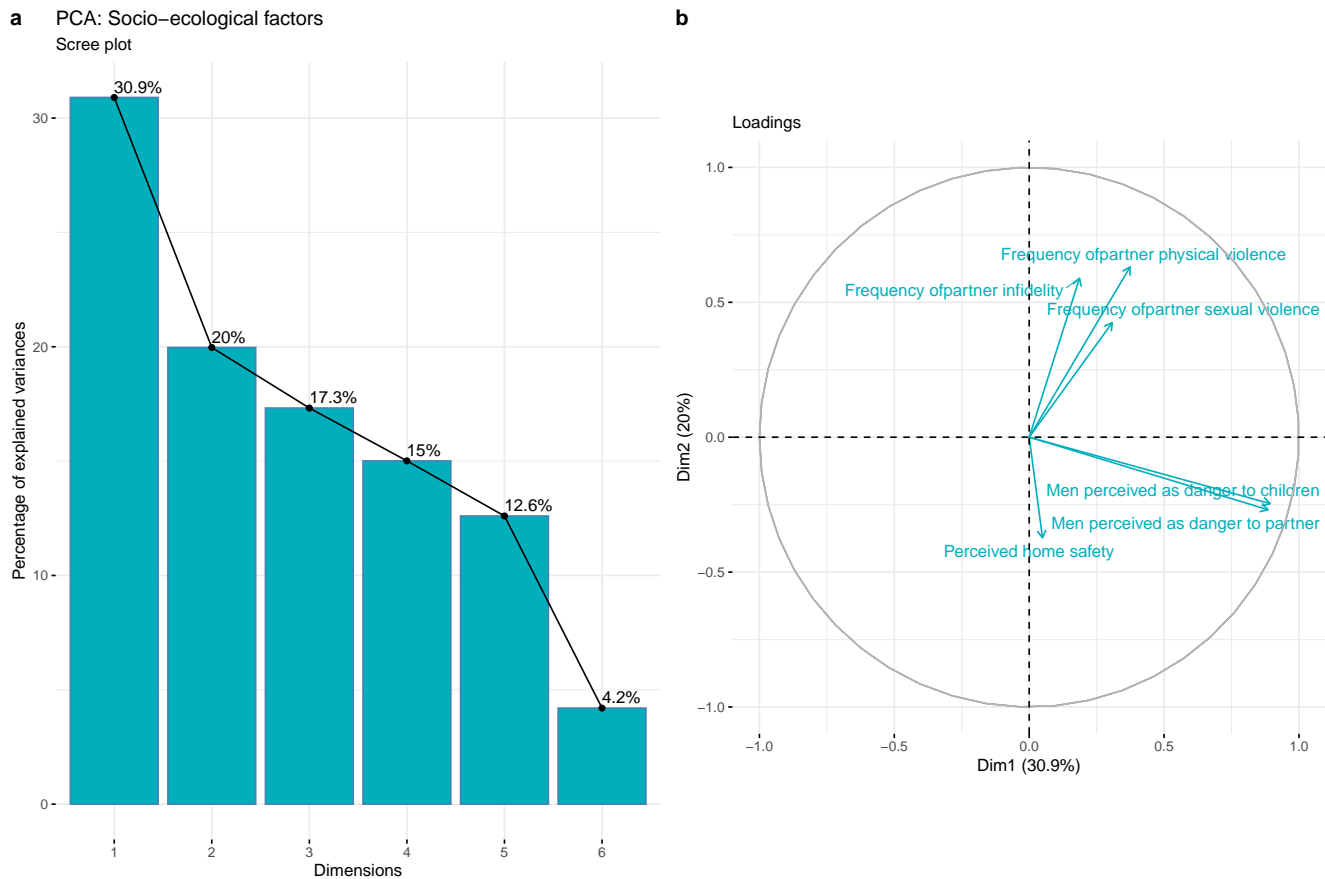

**Figure S2.** Summary of the PCA for all socio-ecological factors. **a.** Scree plot. **b.** Factor loadings.

When including all socio-ecological factors, the only variables that strongly correlate between them and with the PCA dimension (Table ??; Fig. S2), are the two variables that evaluate participant's perception of men as dangerous to children and to their partner.

Because of this, a new PCA was performed on only these two variables, to calculate a score of Men perceived as dangerous. All remaining socio-ecological variables were kept.

Men perceived as dangerous

```
# Select relevant columns for PCA from the 'quests' dataset
quests_pca <- quests |>
  select(
    ID,
    Men_perceived_as_danger_to_partner,
    Men_perceived_as_danger_to_children
  ) |>
  # Rename columns: remove "Men_perceived_as_danger_to_"
  rename_with(~ str_remove_all(., "Men_perceived_as_danger_to_")) |>
  # Capitalize the first letter of each column name
  rename_with(~ str_to_sentence(.))

# Perform PCA on the selected variables (excluding the ID column)
pca_mpd <- PCA(quests_pca[, -1], graph = FALSE)

# Calculate score for the men perceived as dangerous dimension
mpd_scores <- data.frame(pca_mpd$ind$coord)$Dim.1
```

```
# Display summary of the PCA results
pca_mpd$var$cor |>
  # Create a table using the 'kable' function
  kable(
    booktabs = TRUE, # Use 'booktabs' style for better-looking tables in LaTeX
    digits = 2, # Round numerical values to 2 decimal places
    align = "c", # Center align all columns
    linesep = "", # No lines between rows
    caption = "Correlation between variables and PCA dimensions",
    # Caption for the table
    escape = FALSE, # Allow LaTeX commands in the table (e.g., italic or bold)
  ) |>
  # Apply additional LaTeX styling to the table using 'kable_styling'
  kable_styling(
    latex_options = c("HOLD_position", "scale_down") # Keep table position
  )
```

**Table S3.** *Correlation between variables and PCA dimensions*


	Dim.1	Dim.2
Partner	0.93	0.36
Children	0.93	-0.36

### Summary plot

In fact, the two variables related to men perceived as dangerous, could be reduced to a single dimension, that captured over 87% of the variance.

```
# Arrange two plots side by side:
# 1. A scree plot showing the explained variance for each principal component
# 2. A plot showing the variable loadings on the principal components
ggarrange(
  fviz_eig(pca_mpd, addlabels = TRUE, barfill = "#00AFBB") +
    labs(
      title = "PCA: Men perceived as danger to...", # Title for the scree plot
      subtitle = "Scree plot" # Subtitle for the scree plot
    ),
  fviz_pca_var(pca_mpd,
    col.var = "#00AFBB", # Color the variable loadings in teal
    repel = TRUE # Avoid overlapping labels
  ) +
    labs(
      title = NULL, # No title for the loading plot
      subtitle = "Loadings" # Subtitle for the loading plot
    ),
  labels = "auto"
)
```



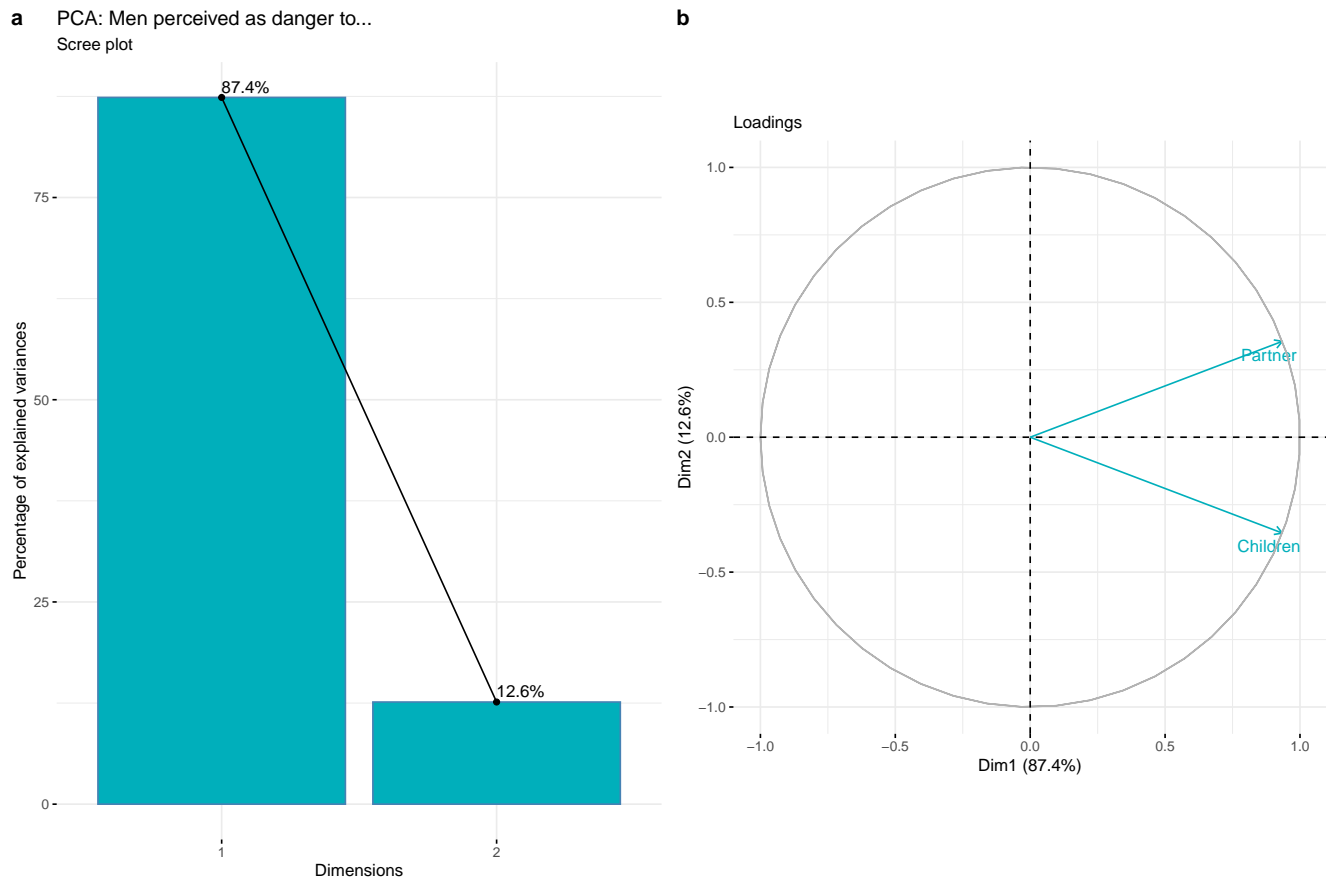

**Figure S3.** Summary of the PCA for factors related to men perceived as dangerous. **a.** Scree plot. **b.** Factor loadings.

#### 1.4.1.2.2 Clean questionnaire data Less columns, with total instrument scores

```
# Clean and modify the 'quests' dataset
quests_clean <- quests |>
  # Recode values in columns that start with "Escasez alimentaria"
  mutate(across(
    starts_with("Escasez alimentaria"),
    ~ recode(.,
      "Nunca" = 0, # Recode "Nunca" to 0
      "Rara vez/algunas veces" = 1, # Recode "Rara vez/algunas veces" to 1
      "Casi siempre" = 2 # Recode "Casi siempre" to 2
    )
  )) |>
  # Perform row-wise operations
  rowwise() |>
  # Create new variables by summing up specific columns
  mutate(
    # Calculate Self-esteem score by summing relevant items (with reverse scoring)
    Self_esteem = sum(
      autoestima_I1, 5 - autoestima_I2, autoestima_I3, autoestima_I4,
      autoestima_I5, 5 - autoestima_I6, autoestima_I7, 5 - autoestima_I8,
      5 - autoestima_I9, autoestima_I10
    ),
    # Calculate Self-perception score by summing columns that start with "SP_"
    Self_perception = sum(across(starts_with("SP_"))),
```

```

# Calculate Perceived safety by summing columns that end with "_safety"
Perceived_safety = sum(across(ends_with("_safety"))),
# Calculate Food insecurity by summing columns that start with "Escasez alimentaria"
Food_insecurity = sum(across(starts_with("Escasez alimentaria")))
) |>
# Remove columns that start with "autoestima_"
select(!starts_with("autoestima_")) |>
# Convert character columns to factors
mutate(across(where(is.character), as.factor)) |>
# Bind the column 'Men_perceived_as_dangerous' from 'mpd_scores' (PCA scores)
bind_cols(Men_perceived_as_dangerous = mpd_scores)

```

#### 1.4.1.3 Subjective evaluation of stimuli

```

# Load the subjective evaluation dataset, removing the last two columns (123 and 124)
eval <- read_excel("Data/Evaluación subjetiva rostros (Respuestas).xlsx") |>
  select(-c(123:124)) |>
# Perform row-wise operations to compute new variables
rowwise() |>
# Calculate the sum of masculinity and attractiveness ratings for both masculinized and
# feminized stimuli
mutate(
  Masculinity_masculinized = sum(across(ends_with("M Mas"))),
  Masculinity_feminized = sum(across(ends_with("F Mas"))),
  Attractiveness_masculinized = sum(across(ends_with("M Atr"))),
  Attractiveness_feminized = sum(across(ends_with("F Atr")))
) |>
# Rename columns for clarity
rename(
  Date = "Marca temporal",
  ID = "Escribe tu código de participante"
)

```

##### 1.4.1.3.1 Wide format

```

# Create a long format dataset by combining attractiveness and masculinity ratings
eval_long <- left_join(
  # First, select relevant columns and pivot the attractiveness ratings to long format
  eval |>
  select(-c(123:126)) |> # Remove unnecessary columns
  select(!ends_with(" Mas")) |> # Exclude masculinity-related columns
  pivot_longer(
    cols = ends_with("Atr"), # Pivot attractiveness ratings to long format
    names_to = "Stimulus",
    values_to = "Attractiveness"
  ) |>
  mutate(Stimulus = str_remove_all(Stimulus, " Atr")), # Clean the Stimulus names
  # Next, pivot the masculinity ratings to long format
  eval |>
  select(-c(123:126)) |> # Remove unnecessary columns
  select(!ends_with(" Atr")) |> # Exclude attractiveness-related columns
  pivot_longer(
    cols = ends_with("Mas"), # Pivot masculinity ratings to long format
    names_to = "Stimulus",

```

```

    values_to = "Masculinity"
  ) |>
  mutate(Stimulus = str_remove_all(Stimulus, " Mas")) # Clean the Stimulus names
)

```

#### 1.4.1.3.2 Long format

```

reg <- rbind(
  read_excel("Data/3Registro Participantes Disponibilidad de Recursos-corregido.xlsx",
    sheet = "UB"
  ) |>
  mutate(University = "UB"),
  read_excel("Data/3Registro Participantes Disponibilidad de Recursos-corregido.xlsx",
    sheet = "CUC"
  ) |>
  mutate(University = "CUC")
) |>
select(-c(
  Grupo, `Entrega de kit`, `Protocolo de bioseguridad`, `Requisitos previos al registro`,
  Consentimiento, `Código de evaluador`:`Código auxiliar que reclutó`
)) |>
rename(
  Date = "Fecha de registro",
  ID = "Codigo del Participante",
  Condition = "Condicion",
  Calibration = "Calibración",
  Gaze_perc = "% Gaze",
  Condition_happiness = "Q Feliz",
  Condition_physical_safety = "Q Segura físicamente",
  Condition_healthy = "Q Saludable",
  Condition_economic_security = "Q Segura económicamente",
  Body_temperature = "Temperatura",
  Ovulating = "Test de ovulación",
  Saliva_pre = "Recolección de saliva pre",
  Saliva_pre_time = "Hora...18",
  Eye_tracking = "Rastreo Ocular",
  Subjective_evaluation = "Evaluación subjetiva",
  Sociodemographic_questionnaire = "Cuestionario sociodemográfico",
  Saliva_post = "Recolección de saliva post",
  Saliva_post_time = "Hora...23",
  Notes = "Observaciones"
) |>
mutate(
  Condition = fct_recode(Condition,
    "Low" = "Baja",
    "High" = "Alta"
  ),
  Calibration = fct_recode(Calibration,
    "<=0.5" = "<0.5 (menor a 0.5)",
    ">0.5" = ">0.5 (mayor a 0.5)",
    "=0.5" = "0.5 (igual a 0.5)",
    NULL = "Selecciona"
  ),
  Ovulating = fct_recode(as.factor(Ovulating),
    "No" = "0",

```

```

    "Yes" = "1"
  )
) |>
mutate_all(~ str_replace_all(., "SI", "Yes")) |>
mutate_all(~ str_replace_all(., "NO", "No")) |>
mutate_all(~ str_replace_all(., "INCOMPLETO", "No")) |>
mutate_all(~ str_replace_all(., "Recuperado", "Data recovered")) |>
mutate_all(~ str_replace_all(., "RECUPERADO", "Data recovered")) |>
mutate_all(~ na_if(., "Selecciona")) |>
mutate_all(~ na_if(., "N/A")) |>
mutate(across(starts_with("Condition_"), as.numeric))

```

#### 1.4.1.4 Resource availability

#### 1.4.2 Full, final database

```

dat_int <- dat_et |>
  left_join(quests_clean, by = c("ID"), multiple = "all") |>
  left_join(eval_long, by = c("ID", "Stimulus"), multiple = "all") |>
  left_join(reg, by = c("ID", "University", "Condition"), multiple = "all")

```

##### 1.4.2.1 Join data files

**1.4.2.2 Filtered database** Filtered database to exclude participants who did not respond to the two control questions correctly, were ovulating, or did not report being exclusively heterosexual.

```

dat <- dat_int |>
  # Filter out rows where Control_question_1 and Control_question_2 are both "No",
  # Ovulating is not "Yes", and Sexual_orientation is "Exclusively heterosexual"
  filter(Control_question_1 == "No" &
    Control_question_2 == "No" &
    Ovulating != "Yes" &
    Sexual_orientation == "Exclusively heterosexual") |>
  # Remove all occurrences of the letter "F" from the Stimulus column
  # (information already in the column Sexual_dimorphism)
  mutate(Stimulus = str_remove_all(Stimulus, "F")) |>
  # Remove all occurrences of the letter "M" from the Stimulus column
  # (information already in the column Sexual_dimorphism)
  mutate(Stimulus = str_remove_all(Stimulus, "M")) |>
  # Ensure that the resulting data frame is ungrouped
  ungroup()

```

After filtering the database and removing data who did not meet these criteria, from an initial sample size of 499 women, the final database contained data from 293 exclusively heterosexual participants, who were not ovulating.

#### 1.4.3 Final individual databases filtered to the final sample

```

reg_fin <- reg |>
  left_join(quests_clean, by = c("ID")) |>
  filter(ID %in% unique(dat$ID))

```

##### 1.4.3.1 Resource availability (filtered)

```

quests_fin <- quests_clean |>
  filter(ID %in% unique(dat$ID))

```

### 1.4.3.2 Questionnaires (filtered)

## 2 Descriptives

### 2.1 Number and age of participants in each condition

```
dat |>
  group_by(ID) |>
  summarise(
    Age = first(Age),
    Condition = first(Condition)
  ) |>
  ungroup() |>
  group_by(Condition) |>
  summarise(
    n = n_distinct(ID),
    Mean = mean(Age, na.rm = TRUE),
    SD = sd(Age, na.rm = TRUE),
    Min = min(Age, na.rm = TRUE),
    Max = max(Age, na.rm = TRUE)
  ) |>
  kable(
    booktabs = TRUE, # Use 'booktabs' style for better-looking tables in LaTeX
    digits = 2, # Round numerical values to 2 decimal places
    align = "c", # Center align all columns
    linesep = "", # No lines between rows
    caption = "Number and age of participants in each condition",
    # Caption for the table
    escape = FALSE, # Allow LaTeX commands in the table (e.g., italic or bold)
    col.names = c(
      "Condition",
      "\\textit{n}",
      "Mean",
      "SD",
      "Min.",
      "Max."
    )
  ) |>
  # Apply additional LaTeX styling to the table using 'kable_styling'
  kable_styling(
    latex_options = c("HOLD_position", "scale_down") # Keep table position
  )
```

**Table S4.** *Number and age of participants in each condition*

Condition	<i>n</i>	Mean	SD	Min.	Max.
High	165	21.41	2.25	18	27
Low	128	21.50	2.25	18	25

### 2.2 Select and wrangle data for descriptive plots

```
# Create desc_quest, combining and transforming quests_fin and reg
desc_quest <-
  # Join the quests_fin and reg dataframes by ID
  quests_fin |>
```

```


left_join(reg, by = c("ID")) |>
# Select only the desired columns
select(
  ID,
  Condition,
  Age,
  City,
  Education,
  Ethnicity,
  Sexual_orientation,
  Relationship_current,
  Relationship_status:Homonal_contraception,
  Sexual_abuse,
  SP_happiness:Socioeconomic_level,
  Perceived_country_safety:Freq_robbery,
  Victim_of_violence,
  Victim_of_gender_violence:Victim_of_armed_conflict,
  Self_esteem:Men_perceived_as_dangerous,
  Freq_partner_physical_violence,
  Freq_partner_infidelity,
  Partner_physical_violence,
  Partner_sexual_violence,
  Freq_partner_sexual_violence,
  # Food security variables (transformed later)
  "Escasez_alimentaria1":"Escasez_alimentaria5"
) |>
# Transform all 'Escasez alimentaria' (food scarcity) columns into categorical variables with
# specific levels.
mutate(
  across(
    starts_with("Escasez alimentaria"),
    ~ recode(.,
      "0" = "Never",
      "1" = "Rarely/sometimes",
      "2" = "Almost always"
    )
  ),
  # Convert character variables to factor for clarity and consistency.
  across(where(is.character), as.factor),
  # Sort factor levels
  across(
    starts_with("Escasez alimentaria"),
    ~ factor(.,
      levels = c(
        "Never",
        "Rarely/sometimes",
        "Almost always"
      )
    )
  )
)

```

## 2.3 Distribution of values across variables

### 2.3.1 Sociodemographic variables

```
# Create a plot that displays the distribution of sociodemographic factors
# by condition, with subplots for numeric and categorical variables.
ggarrange(
  # Plot a: Distribution of values across numeric sociodemographic variables
  desc_quest |>
    select(ID, Condition, Age, Number_of_children) |>
    # Convert data from long to wide format to prepare for plotting
    pivot_longer(where(is.numeric),
                  names_to = "Variable",
                  values_to = "Value") |>
    # Clean and transform the variable names by replacing underscores with spaces
    mutate(Variable = str_replace_all(Variable, "_", " ")) |>
    # Create a plot of density distributions for numeric variables,
    # colored and filled by condition
    ggplot(aes(x = Value, fill = Condition, color = Condition)) +
    geom_density(alpha = 0.3) + # Use semi-transparent density curves
    facet_wrap(~Variable, scales = "free", ncol = 1) + # Display variables in separate panels
    stat_summary(aes(xintercept = after_stat(x), y = 0),
                 fun = mean, geom = "vline", orientation = "y") + # Add vertical lines at mean values
    labs(x = NULL, y = NULL), # Remove axis labels for this panel
  # Plot b: Proportional number of participants across categorical variables
  desc_quest |>
    select(ID, Condition, City, Ethnicity,
           Education, Relationship_current, Relationship_status) |>
    # Convert data from long to wide format to prepare for plotting
    pivot_longer(City:Relationship_status,
                  names_to = "Variable",
                  values_to = "Value") |>
    # Clean and transform the variable names by replacing underscores with spaces
    mutate(Variable = str_replace_all(Variable, "_", " ")) |>
    # Create a plot of bar charts for categorical variables,
    # colored and filled by condition
    ggplot(aes(y = Value, fill = Condition, color = Condition)) +
    geom_bar(alpha = 0.3, position = position_dodge()) + # Use semi-transparent bars
    # Add text labels to display proportional values as percentages
    geom_text(aes(label = scales::percent(after_stat(prop), accuracy = 0.1)),
              xjust = "inward",
              position = position_dodge(.9),
              stat = "prop",
              color = "black",
              size = 3) +
    facet_wrap(~Variable, scales = "free") + # Display variables in separate panels
    scale_y_discrete(labels = label_wrap(20)) + # Wrap long labels for categorical axes
    theme(axis.text.y = element_text(size = 8)) + # Reduce font size for y-axis text
    labs(x = NULL, y = NULL), # Remove axis labels for this panel
  # Arrange subplots into a grid with specified widths and share legends
  widths = c(1, 3),
  common.legend = TRUE,
  legend = "bottom",
  labels = "auto"
)
```

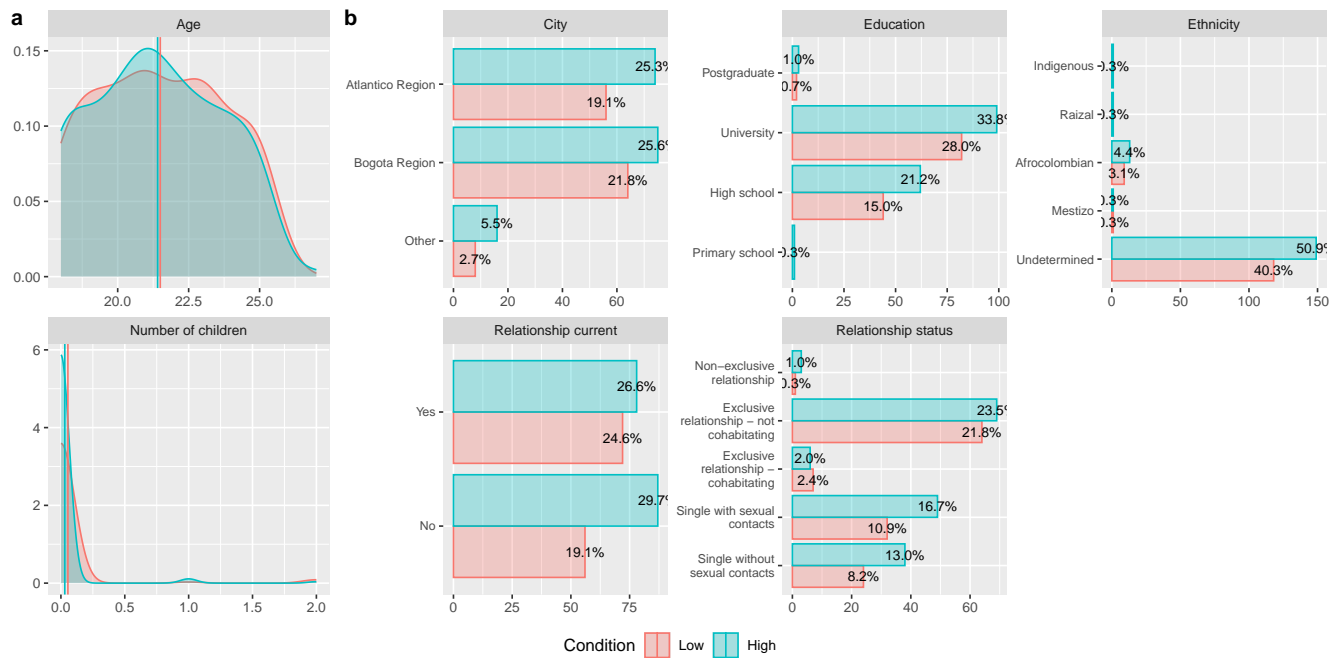


**Figure S4.** Distribution of values across sociodemographic variables, by condition. **a.** Distribution of values across numeric sociodemographic variables. Colored vertical lines indicate the mean value for each variable under each condition. **b.** Proportional number of participants across categorical variables.

### 2.3.2 Access to resources

```
# Create a plot that displays the distribution of socioeconomic factors
# by condition.
ggarrange(
  # Select relevant variables from the dataset (desc_quest)
  desc_quest |>
  select(ID, Condition,
    Socioeconomic_level, Electricity, Internet_access, Internet_use,
    TV, Hospital_access) |>
  # Convert data from long to wide format to prepare for plotting
  pivot_longer(Socioeconomic_level:Hospital_access,
    names_to = "Variable",
    values_to = "Value") |>
  # Clean and transform the variable names by replacing underscores with spaces
  mutate(Variable = str_replace_all(Variable, "_", " ")) |>
  # Create a plot of bar charts for socioeconomic variables,
  # colored and filled by condition
  ggplot(aes(y = Value, fill = Condition, color = Condition)) +
  geom_bar(alpha = 0.3, position = position_dodge()) + # Use semi-transparent bars
  # Add text labels to display proportional values as percentages
  geom_text(aes(label = scales::percent(after_stat(prop), accuracy = 0.1)),
    xjust = "inward",
    position = position_dodge(.9),
    stat = "prop",
    color = "black",
    size = 3) +
  facet_wrap(~Variable, scales = "free") + # Display variables in separate panels
  scale_y_discrete(labels = label_wrap(20)) + # Wrap long labels for categorical axes
  theme(axis.text.y = element_text(size = 8)) + # Reduce font size for y-axis text
  labs(x = NULL, y = NULL), # Remove axis labels
```



```
# Arrange subplots into a grid with specified widths and share legends
widths = c(1, 3),
common.legend = TRUE,
legend = "bottom"
)
```

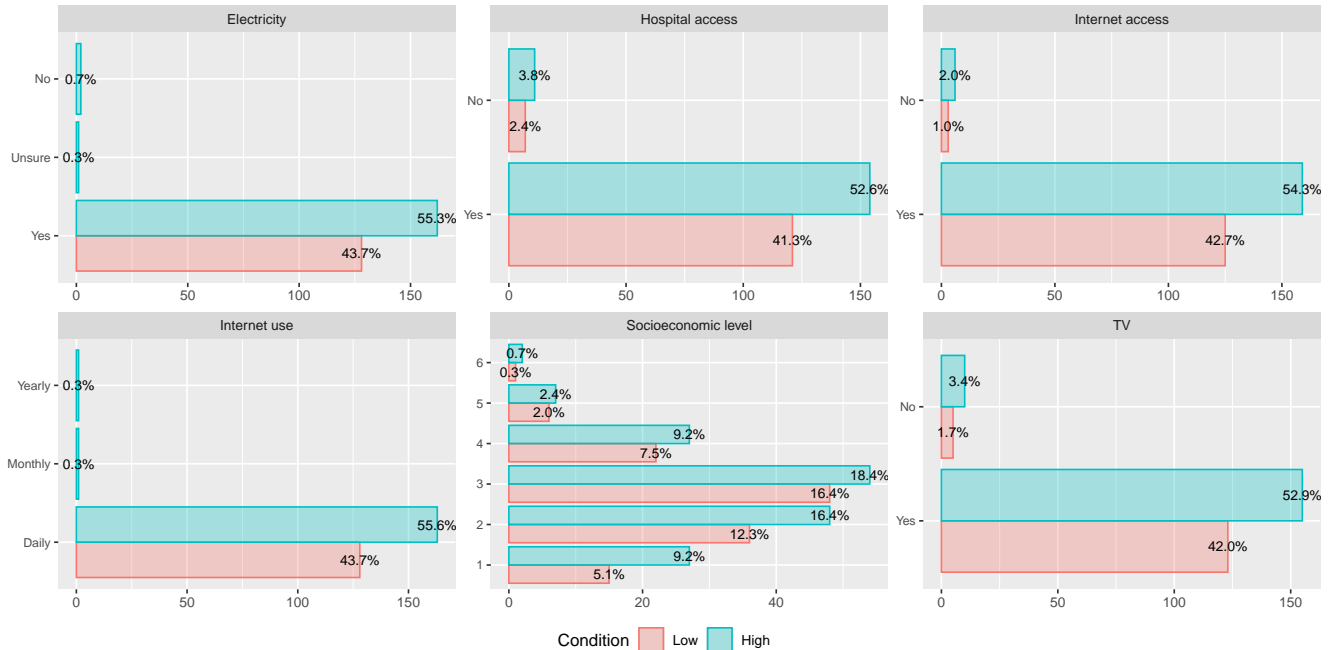


**Figure S5.** Proportional number of participants across categorical variables that measure access to resources.

### 2.3.3 Health-related variables

```
ggarrange(
  # Select relevant columns from desc_quest and pivot them into a long format
  desc_quest |>
  select(ID, Condition, Freq_illness, SP_health) |>
  # Convert the Frequency of illness and Self-perceived health columns into separate rows
  pivot_longer(Freq_illness:SP_health,
    names_to = "Variable",
    values_to = "Value") |>
  # Clean up variable names by replacing underscores with spaces
  mutate(Variable = str_replace_all(Variable, "_", " ")) |>
  # Rename variables
  mutate(Variable = str_replace_all(Variable, "Freq", "Frequency of")) |>
  mutate(Variable = str_replace_all(Variable, "SP", "Self-perceived")) |>
  # Convert the Value column to numeric
  mutate(Value = as.numeric(Value)) |>
  # Create a ggplot object
  ggplot(aes(x = Value, fill = Condition, color = Condition)) +
  # Plot density curves for each condition within each variable
  geom_density(alpha = 0.3) +
  # Divide the plot into facets by Variable
  facet_wrap(~Variable) +
  # Add vertical lines to indicate mean values for each group
  stat_summary(aes(xintercept = after_stat(x), y = 0),
    fun = mean, geom = "vline", orientation = "y") +
```

```
# Set up plot labels and title with NULL values for x and y axes.
labs(x = NULL, y = "Density"),
# Specify the widths of the two columns and common legend position (bottom)
widths = c(2, 1),
common_legend = TRUE,
legend = "bottom")
```

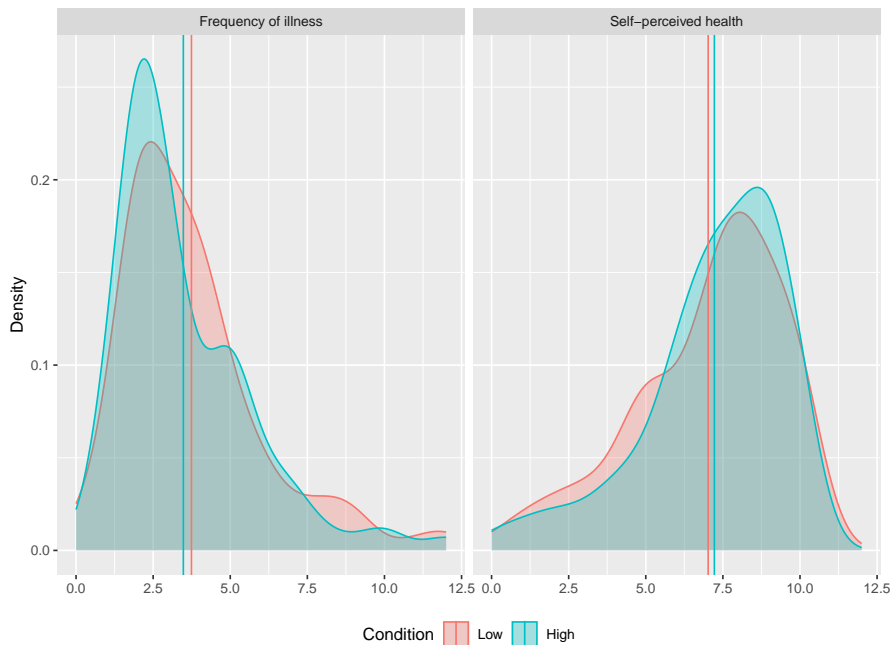

**Figure S6.** Distribution of values across numeric health-related variables. Colored vertical lines indicate the mean value for each variable under each condition.


### 2.3.4 Food security

```
ggarrange(
  # Select columns from desc_quest, including 'Escasez alimentaria' (food scarcity)
  desc_quest |>
  select(ID, Condition, "Escasez alimentaria1":"Escasez alimentaria5") |>
  # Pivot the Escasez alimentaria1 to Escasez alimentaria5 columns into a long format
  pivot_longer("Escasez alimentaria1":"Escasez alimentaria5",
    names_to = "Variable",
    values_to = "Value") |>
  # Clean up variable names
  mutate(Variable = str_replace_all(Variable, "Escasez alimentaria", "")) |>
  mutate(Variable = str_replace_all(Variable, "1", "1. Smaller food portions")) |>
  mutate(Variable = str_replace_all(Variable, "2", "2. Reduced number of meals")) |>
  mutate(Variable = str_replace_all(Variable, "3", "3. Food scarcity at home")) |>
  mutate(Variable = str_replace_all(Variable, "4", "4. Sleeping with hunger")) |>
  mutate(Variable = str_replace_all(Variable, "5", "5. Day and night without eating")) |>
  # Create a ggplot object for the first set of data
  ggplot(aes(y = Value, fill = Condition, color = Condition)) +
  # Plot bar charts for each condition within each variable
  geom_bar(alpha = 0.3, position = position_dodge()) +
  # Add text labels on top of the bars showing the proportion of each category
  geom_text(aes(label = scales::percent(after_stat(prop), accuracy = 0.1)),
    vjust = "inward",
```

```

    position = position_dodge(.9),
    stat = "prop",
    color = "black",
    size = 2.5) +
# Divide the plot into facets by Variable
facet_wrap(~Variable, scales = "free") +
# Set labels for the y-axis with a maximum width of 20 characters
scale_y_discrete(labels = label_wrap(20)) +
# Adjust the text size of the y-axis
theme(axis.text.y = element_text(size = 8)) +
labs(x = NULL, y = NULL, title = "Items"),
# Select columns from desc_quest dataframe, including Food_insecurity column
desc_quest |>
select(ID, Condition, Food_insecurity) |>
# Convert the Food_insecurity column into long format
pivot_longer(Food_insecurity,
  names_to = "Variable",
  values_to = "Value") |>
# Convert the Value column to numeric
mutate(Value = as.numeric(Value)) |>
# Clean up variable names
mutate(Variable = str_replace_all(Variable, "_", " ")) |>
# Create a ggplot object for the second set of data
ggplot(aes(x = Value, fill = Condition, color = Condition)) +
# Plot density curves for each condition within each variable
geom_density(alpha = 0.3) +
# Divide the plot into facets by Variable
facet_wrap(~Variable) +
# Add vertical lines to indicate mean values
stat_summary(aes(xintercept = after_stat(x), y = 0),
  fun = mean, geom = "vline", orientation = "y") +
labs(x = NULL, y = NULL, title = "Total"),
# Specify the widths of the two columns and common legend position (bottom)
widths = c(3, 1),
common.legend = TRUE,
legend = "bottom",
labels = "auto")

```

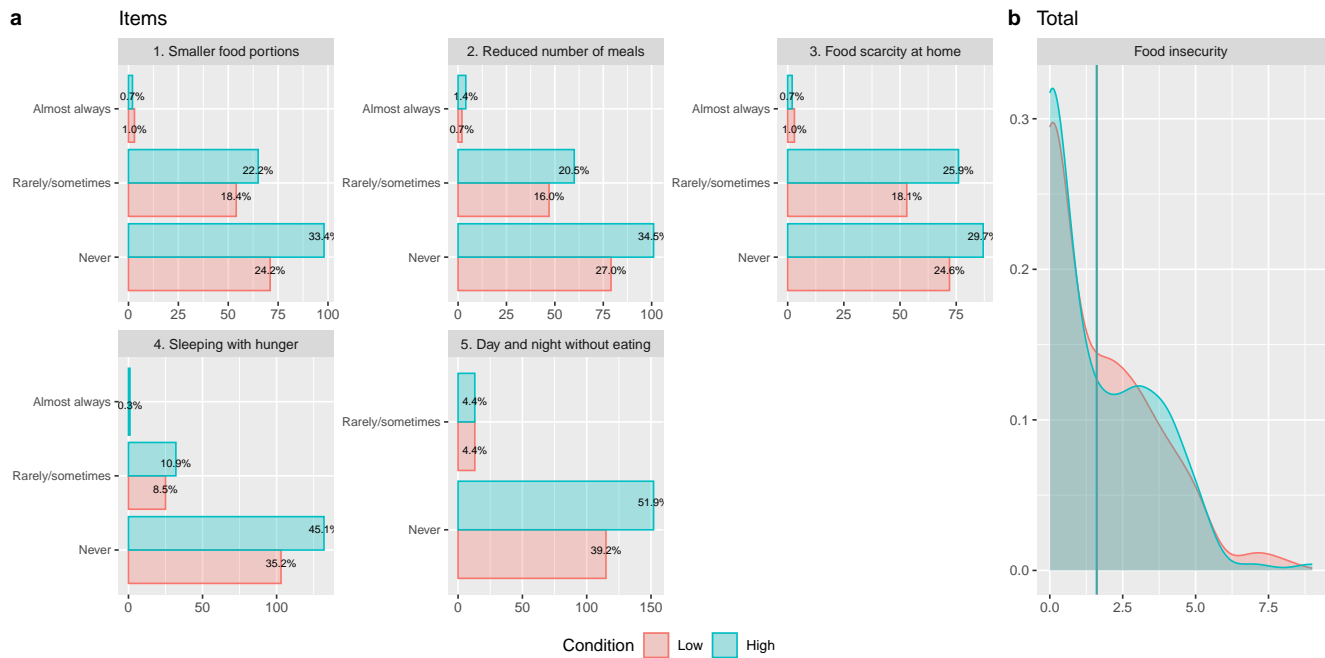

**Figure S7.** Distribution of values across food security variables, by condition. **a.** Proportional number of participants across ordinal items. **b.** Distribution of values for the total score. Colored vertical lines indicate the mean value for participants in each condition.


### 2.3.5 Hormonal variables

```
ggarrange(
  reg_fin |>
    select(ID, Condition, Body_temperature) |>
    pivot_longer(Body_temperature,
      names_to = "Variable",
      values_to = "Value") |>
    mutate(Value = as.numeric(Value)) |>
    ggplot(aes(x = Value, fill = Condition, color = Condition)) +
    geom_density(alpha = 0.3) +
    facet_wrap(~Variable) +
    stat_summary(aes(xintercept = after_stat(x), y = 0),
      fun = mean, geom = "vline", orientation = "y") +
    labs(x = NULL, y = NULL),
  reg_fin |>
    left_join(desc_quest, by = c("ID", "Condition", "Hormonal_contraception")) |>
    select(ID, Condition, Ovulating, Hormonal_contraception) |>
    pivot_longer(Ovulating:Hormonal_contraception,
      names_to = "Variable",
      values_to = "Value") |>
    mutate(Variable = str_replace_all(Variable, "_", " ")) |>
    ggplot(aes(y = Value, fill = Condition, color = Condition)) +
    geom_bar(alpha = 0.3, position = position_dodge()) +
    geom_text(aes(label = scales::percent(after_stat(prop), accuracy = 0.1)),
      vjust = "inward",
      position = position_dodge(.9),
      stat = "prop",
      color = "black",
      size = 2.5) +
    facet_wrap(~Variable, scales = "free") +
```

```

scale_y_discrete(labels = label_wrap(20)) +
  theme(axis.text.y = element_text(size = 8)) +
  labs(x = NULL, y = NULL),
widths = c(1, 2),
common.legend = TRUE,
legend = "bottom",
labels = "auto")

```

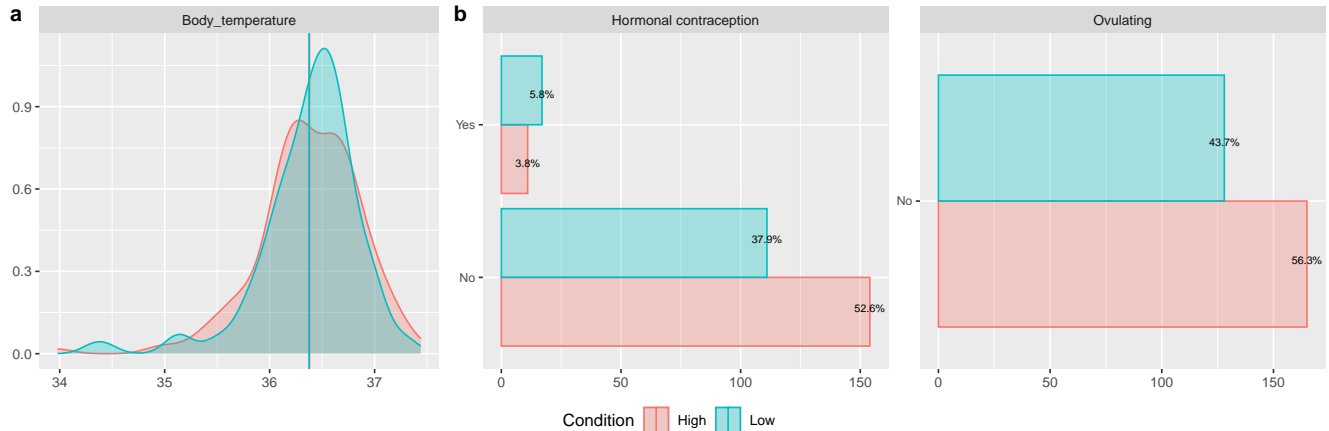


**Figure S8.** Distribution of values across hormonal variables, by condition. **a.** Distribution of values for body temperature. Colored vertical lines indicate the mean value for participants in each condition. **b.** Proportional number of participants across categorical variables.

### 2.3.6 Self-perceived conditions

```

desc_quest |>
  select(ID, Condition, starts_with("SP_"), -SP_health) |>
  pivot_longer(where(is.numeric),
    names_to = "Variable",
    values_to = "Value") |>
  mutate(Variable = str_replace_all(Variable, "SP_", "")) |>
  mutate(Variable = str_replace_all(Variable, "self_", "self-")) |>
  mutate(Variable = str_replace_all(Variable, "_", " ")) |>
  mutate(Variable = str_to_sentence(Variable)) |>
  ggplot(aes(x = Value, fill = Condition, color = Condition)) +
  geom_density(alpha = 0.3) +
  theme(legend.position = "bottom") +
  stat_summary(aes(xintercept = after_stat(x), y = 0),
    fun = mean, geom = "vline", orientation = "y") +
  labs(x = NULL, y = NULL) +
  facet_wrap(~Variable, scales = "free")


```

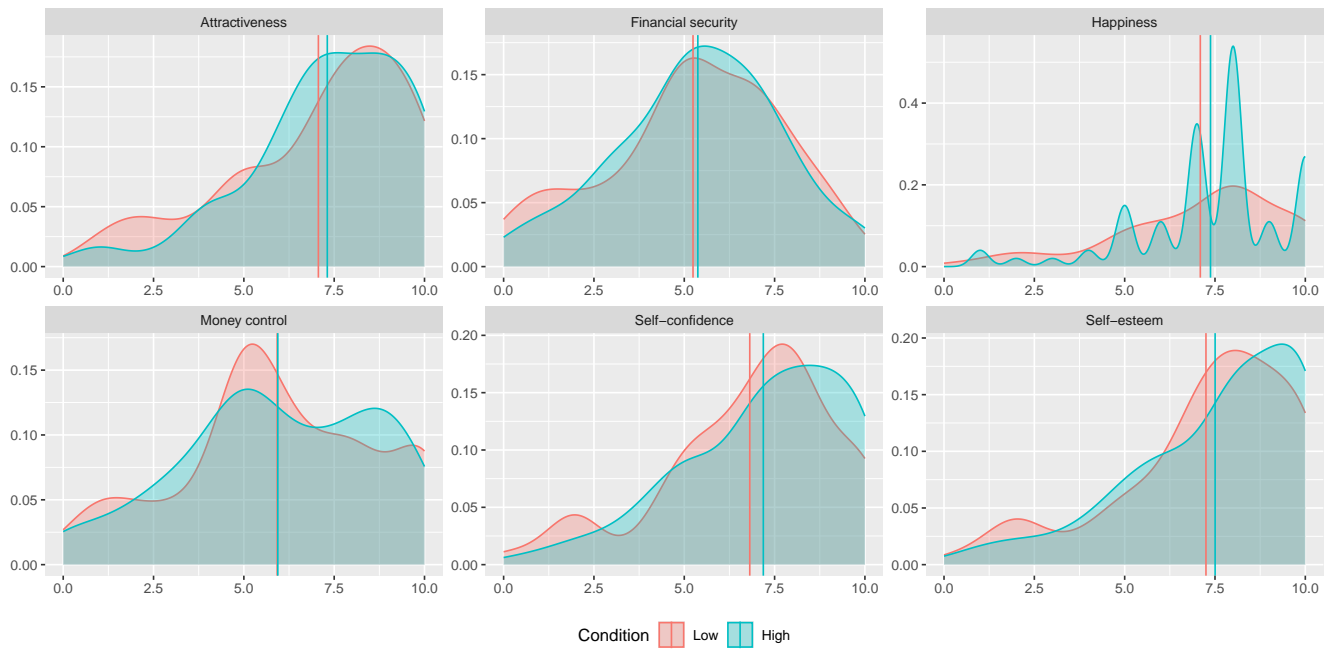

**Figure S9.** Distribution of values across self-perceived conditions. Colored vertical lines indicate the mean value for participants in each condition.

### 2.3.7 Last partner perception

```
desc_quest |>
  select(ID, Condition, Partner_masculinity, Partner_dominance,
         Partner_attractiveness) |>
  pivot_longer(where(is.numeric),
               names_to = "Variable",
               values_to = "Value") |>
  mutate(Variable = str_replace_all(Variable, "Partner_", "")) |>
  mutate(Variable = str_to_sentence(Variable)) |>
  ggplot(aes(x = Value, fill = Condition, color = Condition)) +
  geom_density(alpha = 0.3) +
  theme(legend.position = "bottom") +
  stat_summary(aes(xintercept = after_stat(x), y = 0),
               fun = mean, geom = "vline", orientation = "y") +
  labs(x = NULL, y = NULL) +
  facet_wrap(~Variable, scales = "free")
```

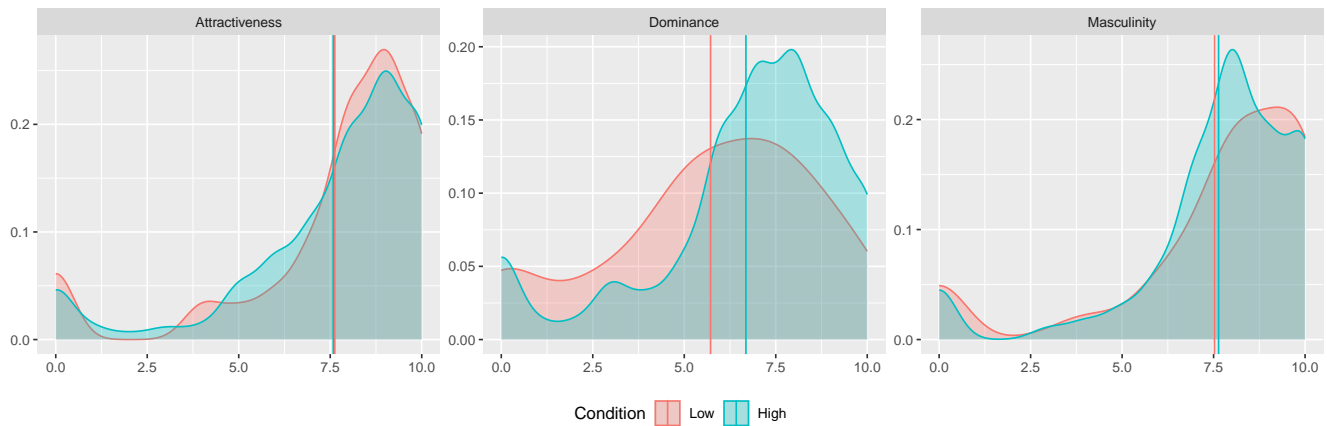

**Figure S10.** Distribution of values across perceptions of the last partner by condition. Colored vertical lines indicate the mean value for participants in each condition.

### 2.3.8 Context violence

```
ggarrange(desc_quest |>
  select(ID, Condition, ends_with("_safety"), Freq_robbery) |>
  pivot_longer(where(is.numeric),
    names_to = "Variable",
    values_to = "Value") |>
  mutate(Value = as.numeric(Value)) |>
  mutate(Variable = str_replace_all(Variable, "_safety", "")) |>
  mutate(Variable = str_replace_all(Variable, "Perceived_", "")) |>
  mutate(Variable = str_replace_all(Variable, "Freq_", "Frequency of ")) |>
  mutate(Variable = str_replace_all(Variable, "Perceived", "General perception")) |>
  mutate(Variable = str_to_sentence(Variable)) |>
  ggplot(aes(x = Value, fill = Condition, color = Condition)) +
  geom_density(alpha = 0.3) +
  labs(title = "Safety perception") +
  facet_wrap(~factor(Variable, c("Country", "City", "Neighborhood", "Home",
    "Frequency of robbery", "General perception")),
    scales = "free") +
  stat_summary(aes(xintercept = after_stat(x), y = 0),
    fun = mean, geom = "vline", orientation = "y") +
  labs(x = NULL, y = NULL),
  ggarrange(desc_quest |>
    select(ID, Condition,
      Men_perceived_as_dangerous) |>
    pivot_longer(Men_perceived_as_dangerous,
      names_to = "Variable",
      values_to = "Value") |>
    mutate(Variable = str_replace_all(Variable,
      "_", " ")) |>
    mutate(Variable = str_to_sentence(Variable)) |>
    ggplot(aes(x = Value, fill = Condition, color = Condition)) +
    geom_density(alpha = 0.3) +
    labs(title = "Men perceived as dangerous") +
    facet_wrap(~Variable, scales = "free") +
    stat_summary(aes(xintercept = after_stat(x), y = 0),
      fun = mean, geom = "vline", orientation = "y") +
    theme(axis.text.y = element_text(size = 8)) +
```


```

  labs(x = NULL, y = NULL),
desc_quest |>
  select(ID, Condition, Victim_of_armed_conflict) |>
  pivot_longer(Victim_of_armed_conflict,
               names_to = "Variable",
               values_to = "Value") |>
  mutate(Variable = str_replace_all(Variable,
                                    "_", " ")) |>

  ggplot(aes(y = Value, fill = Condition, color = Condition)) +
  geom_bar(alpha = 0.3, position = position_dodge()) +
  geom_text(aes(label = scales::percent(after_stat(prop), accuracy = 0.1)),
            vjust = "inward",
            position = position_dodge(.9),
            stat = "prop",
            color = "black",
            size = 2.5) +

  labs(title = "Victim of armed conflict") +
  facet_wrap(~Variable, scales = "free") +
  scale_y_discrete(labels = label_wrap(20)) +
  theme(axis.text.y = element_text(size = 8)) +
  labs(x = NULL, y = NULL),
  ncol = 1,
  labels = c("", "c")),
widths = c(2, 1),
common.legend = TRUE,
legend = "bottom",
labels = "auto")

```

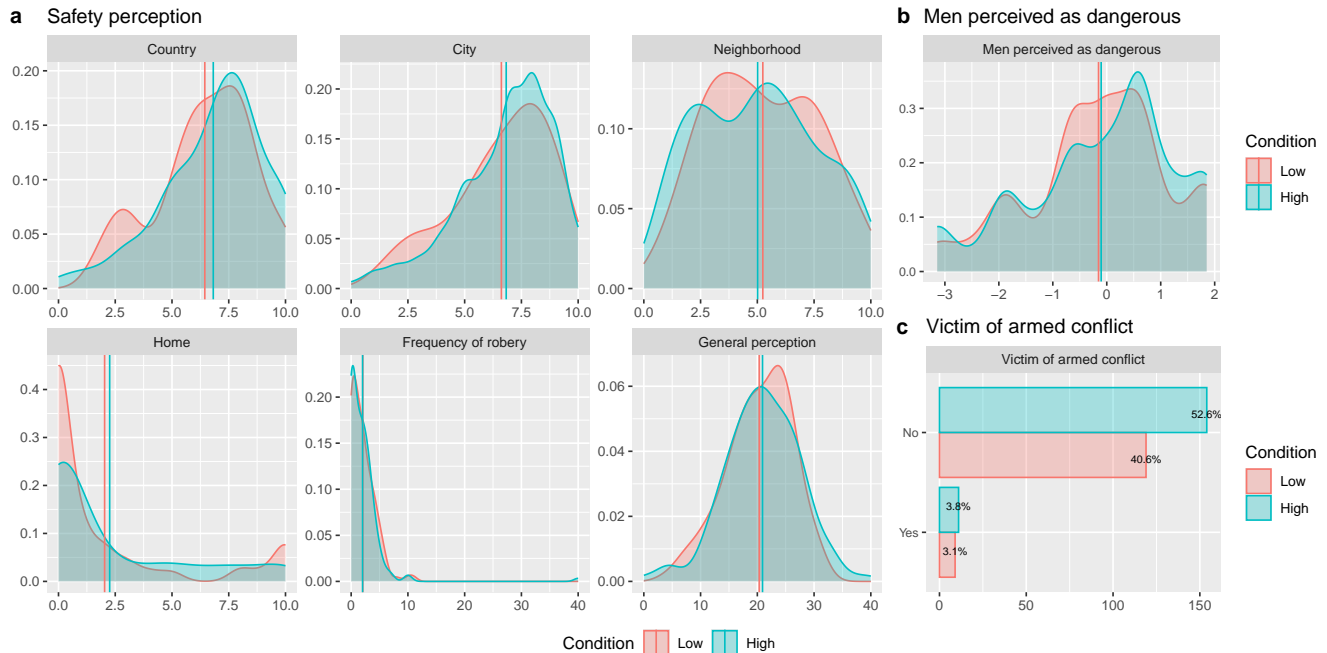

**Figure S11.** Distribution of values across perceptions of violence, by condition. **a.** Distribution of values across variables related to safety perception. **b.** Perceptions of men as dangerous. **c.** Proportional number of participants who reported being victims of the Colombian armed conflict. For panels a and b, colored vertical lines indicate the mean value for each variable under each condition.




### 2.3.9 Gender and partner violence

```

ggarrange(desc_quest |>
  select(ID, Condition, Freq_partner_physical_violence,
    , Freq_partner_sexual_violence, Freq_partner_infidelity) |>
  pivot_longer(where(is.numeric),
    names_to = "Variable",
    values_to = "Value") |>
  mutate(Value = as.numeric(Value)) |>
  mutate(Variable = str_replace_all(Variable, "Freq_partner_", "")) |>
  mutate(Variable = str_replace_all(Variable, "_", " ")) |>
  mutate(Variable = str_to_sentence(Variable)) |>
  ggplot(aes(x = Value, fill = Condition, color = Condition)) +
  geom_density(alpha = 0.3) +
  facet_wrap(~factor(Variable, c("Physical violence",
    "Sexual violence",
    "Infidelity")),
    scales = "free", ncol = 1) +
  stat_summary(aes(xintercept = after_stat(x), y = 0),
    fun = mean, geom = "vline", orientation = "y") +
  labs(x = NULL, y = NULL),
desc_quest |>
  select(ID, Condition,
    Victim_of_gender_violence,
    Partner_physical_violence,
    Partner_sexual_violence,
    Sexual_abuse) |>
  pivot_longer(Victim_of_gender_violence:Sexual_abuse,
    names_to = "Variable",
    values_to = "Value") |>
  mutate(Value = as.factor(Value)) |>
  mutate(Variable = str_replace_all(Variable,
    "_", " ")) |>
  mutate(Variable = str_to_sentence(Variable)) |>
  ggplot(aes(y = Value, fill = Condition, color = Condition)) +
  geom_bar(alpha = 0.3, position = position_dodge()) +
  geom_text(aes(label = scales::percent(after_stat(prop), accuracy = 0.1)),
    vjust = "inward",
    position = position_dodge(.9),
    stat = "prop",
    color = "black",
    size = 2.5) +
  facet_wrap(~Variable,
    scales = "free") +
  scale_y_discrete(labels = label_wrap(20)) +
  theme(axis.text.y = element_text(size = 8)) +
  labs(x = NULL, y = NULL),
widths = c(1, 3),
common.legend = TRUE,
legend = "bottom",
labels = "auto")

```

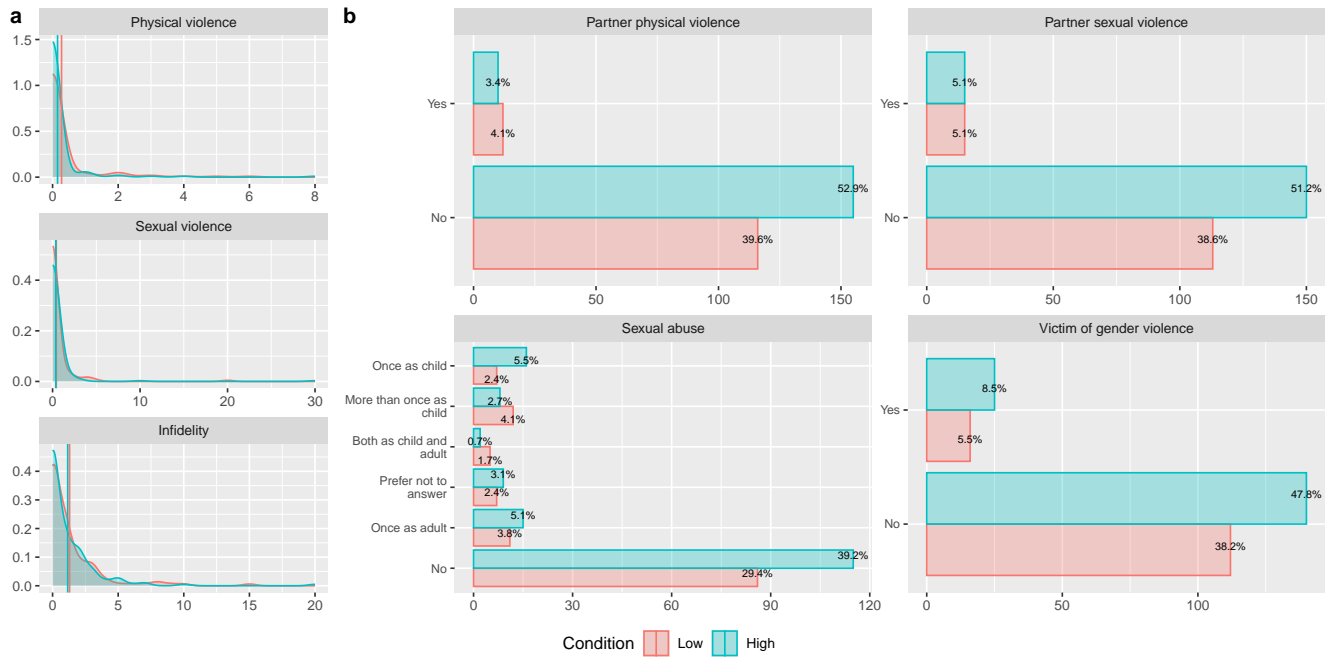


**Figure S12.** Distribution of values across gender and partner violence suffered by participants, by condition. **a.** Distribution of values across numeric variables. Colored vertical lines indicate the mean value for each variable under each condition. **b.** Proportional number of participants across categorical variables.

### 2.3.10 Subjective evaluation of stimuli

```
cond_labs <- c("Condition: High", "Condition: Low")
names(cond_labs) <- c("High", "Low")

eval_long |>
  left_join(reg, by = c("ID")) |>
  filter(ID %in% unique(dat$ID)) |>
  rowwise() |>
  mutate(Sexual_dimorphism = ifelse(grepl("F", Stimulus), "Feminine", "Masculine")) |>
  select(Condition, Sexual_dimorphism, Attractiveness, Masculinity) |>
  pivot_longer(Attractiveness:Masculinity,
    names_to = "Variable",
    values_to = "Value") |>
  ggplot(aes(x = Value, fill = Sexual_dimorphism, color = Sexual_dimorphism)) +
  geom_density(alpha = 0.3) +
  theme(legend.position = "bottom") +
  labs(y = "Density", x = "Score", color = "Sexual dimorphism", fill = "Sexual dimorphism") +
  facet_grid(Condition~Variable, scales = "free",
    labeller = labeller(Condition = cond_labs)) +
  scale_color_manual(values = c("#E69F00", "#56B4E9")) +
  scale_fill_manual(values = c("#E69F00", "#56B4E9")) +
  stat_summary(aes(xintercept = after_stat(x), y = 0),
    fun = mean, geom = "vline", orientation = "y")
```

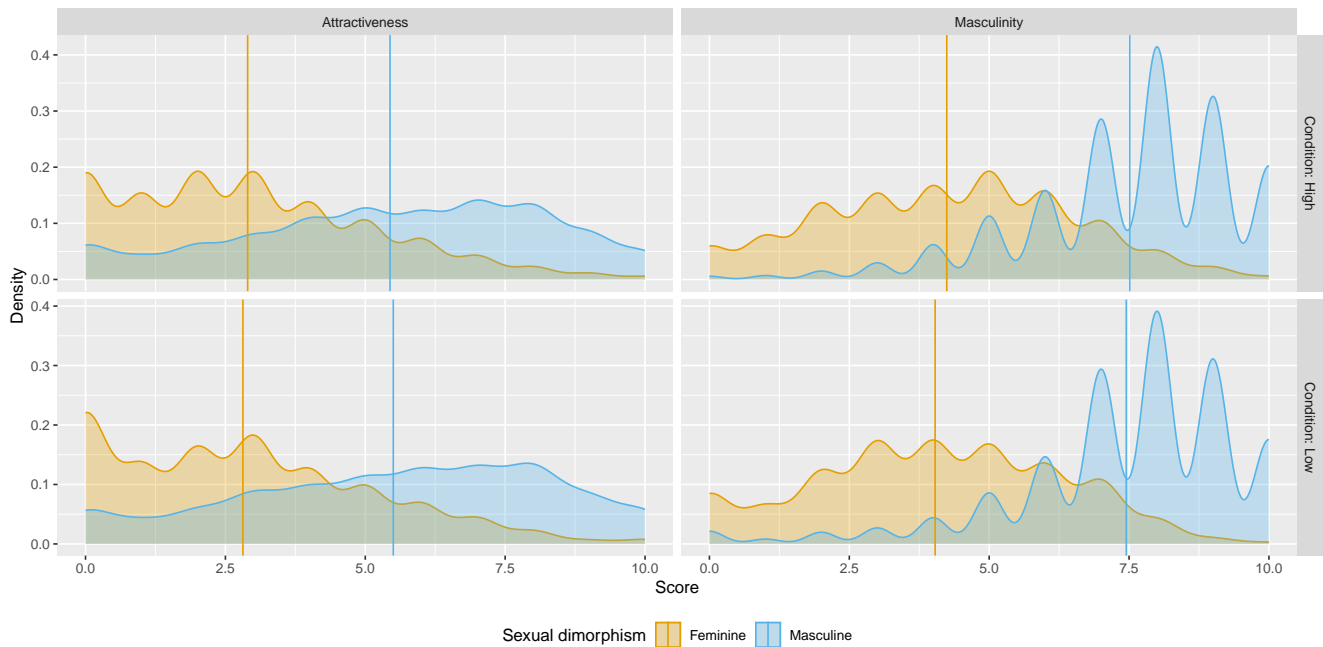

**Figure S13.** Distribution of values across subjective evaluations of attractiveness and masculinity of the stimuli used in the experiment, split by sexual dimorphism manipulations (feminine, masculine). Panels on the left are for attractiveness scores, and on the right for masculinity scores. Top panels are for participants in the high condition, and on the bottom for the low condition. Colored vertical lines indicate the mean value for participants in each condition.

## 2.4 Correlations

### 2.4.1 Correlations in partner perceptions

```
quests_fin |>
  select(
    Freq_partner_physical_violence,
    Freq_partner_sexual_violence,
    Freq_partner_infidelity,
    Partner_masculinity,
    Partner_dominance,
    Partner_attractiveness) |>
  rename(
    "PPV" = "Freq_partner_physical_violence",
    "PSV" = "Freq_partner_sexual_violence",
    "PI" = "Freq_partner_infidelity",
    "Masculinity" = "Partner_masculinity",
    "Dominance" = "Partner_dominance",
    "Attractiveness" = "Partner_attractiveness") |>
  ggcorr(geom = "blank", label = TRUE, label_size = 2,
    hjust = 0.75, label_round = 3) +
  geom_point(size = 10, aes(color = coefficient > 0, alpha = abs(coefficient) > 0.5)) +
  scale_alpha_manual(values = c("TRUE" = 0.3, "FALSE" = 0)) +
  guides(color = FALSE, alpha = FALSE)
```

```
## Warning: The '<scale>' argument of 'guides()' cannot be 'FALSE'. Use "none" instead as
## of ggplot2 3.3.4.
## This warning is displayed once every 8 hours.
## Call 'lifecycle::last_lifecycle_warnings()' to see where this warning was
```

## generated.



## 2.4.2 Correlations table (general)

```
desc_quest |>
  left_join(reg_fin |>
    select(ID, Body_temperature),
    by = c("ID")) |>
  select(Age,
    Freq_illness,
    starts_with("SP_"),
    Partner_masculinity, Partner_dominance, Partner_attractiveness,
    ends_with("_safety"), Freq_robbery,
    Freq_partner_physical_violence,
    Freq_partner_sexual_violence,
    Freq_partner_infidelity) |>
  rename_with(~str_replace_all(., "_", " ")) |>
  rename_with(~str_replace_all(., "Freq", "Frequency of")) |>
  rename_with(~str_replace_all(., "Frequency of partner", "Partner")) |>
  rename_with(~str_replace_all(., "SP ", "")) |>
  rename_with(~str_replace_all(., "Perceived", "")) |>
  rename_with(~str_replace_all(., "asculinity", "asc.)) |>
  rename_with(~str_replace_all(., "ttractiveness", "ttr.)) |>
  rename_with(~str_replace_all(., "Neighborhood", "Neighbor.)) |>
  rename_with(~str_replace_all(., "Partner attr.", "Attractive.)) |>
  rename_with(~str_replace_all(., "Dominance", "Dom.)) |>
  rename_with(~str_replace_all(., "Partner ", "")) |>
  rename_with(~str_to_sentence(.)) |>
```

```

corr.stars() |>
rownames_to_column(var = " ") |>
dplyr::slice(-1) |>
kable(digits = 2,
      booktabs = TRUE,
      align = c("l", rep("c", 20)),
      linesep = "",
      caption = "Correlations between XXXXXX",
      escape = FALSE) |>
kable_styling(latex_options = c("HOLD_position"),
              font_size = 5) |>
column_spec(1, width = "1.2cm") |>
column_spec(2:21, width = "0.7cm") |>
add_header_above(c(" ",
                    "Age" = 1,
                    "Health" = 1,
                    "Self-perceived conditions" = 7,
                    "Current/last partner\nperception" = 3,
                    "Perceived context\nviolence" = 6,
                    "Frequency of\npartner violence" = 2),
                 bold = TRUE) |>
footnote(general = paste0("Values represent Pearson correlation coefficients ($r$). ",
                           "For significance, $^{\dag}$p$ < 0.1, *$p$ < 0.05, ",
                           "**$p$ < 0.01, ***$p$ < 0.001. ",
                           "Significant correlations are in bold."),
         threeparttable = TRUE,
         footnote_as_chunk = TRUE,
         escape = FALSE) |>
landscape()

```

Table S5. *Correlations between XXXXXX*

	Age	Health	Self-perceived conditions							Current/last partner perception			Perceived context violence						Frequency of partner violence	
	Age	Frequency of illness	Happiness	Financial security	Money control	Attr.	Self confidence	Self esteem	Health	Masc.	Dominance	Attractive	Country safety	City safety	Neighborhood safety	Home safety	Safety	Frequency of robbery	Physical violence	Sexual violence
Frequency of illness	-0.03																			
Happiness	-0.05	- 0.2***																		
Financial security	-0.1†	-0.06	0.59***																	
Money control	0.03	- 0.18**	0.48***	0.62***																
Attr.	-0.06	- 0.16**	0.68***	0.46***	0.51***															
Self confidence	-0.07	- 0.25***	0.73***	0.48***	0.51***	0.87***														
Self esteem	-0.06	- 0.25***	0.75***	0.49***	0.53***	0.84***	0.93***													
Health	-0.02	- 0.26***	0.69***	0.45***	0.45***	0.68***	0.72***	0.73***												
Masc.	0.14*	-0.1†	0.17**	0.18**	0.18**	0.21***	0.22***	0.25***	0.2***											
Dominance	0.05	-0.08	0.13*	0.17**	0.14*	0.17**	0.15**	0.19**	0.12*	0.72***										
Attractive.	0.13*	-0.05	0.17**	0.18**	0.19**	0.18**	0.19**	0.23***	0.18**	0.78***	0.6***									
Country safety	0.02	-0.02	0.19**	0.01	0.06	0.22***	0.21***	0.21***	0.17**	-0.04	0.04	-0.07								
City safety	0.02	-0.01	0.17**	0.02	0.04	0.21***	0.19**	0.19***	0.17**	-0.06	0.03	-0.08	0.82***							
Neighborhood safety	0.11†	-0.04	0.12*	-0.08	0.00	0.12*	0.09	0.09	0.06	0.03	0.02	-0.03	0.32***	0.32***						
Home safety	0.01	-0.07	-0.03	0.01	-0.03	-0.01	0.00	-0.03	-0.03	0.03	0.01	-0.04	-	-	0.32***					
Safety	0.06	-0.06	0.16**	-0.02	0.02	0.19**	0.18**	0.17**	0.13*	0.00	0.04	-0.08	0.24***	0.31***						
Frequency of robbery	-0.11†	0.10	-0.03	0.01	-0.05	-0.09	-0.09	-0.11†	-0.09	-0.02	-0.02	0.00	0.04	0.05	0.11†	0.09	0.12*			
Physical violence	0.19**	0.06	-0.03	0.00	-0.04	-0.01	-0.08	-0.08	-0.03	-0.03	0.01	-0.06	0.07	0.04	0.05	0.01	0.06	0.00		
Sexual violence	0.02	-0.05	0.09	0.08	0.02	0.08	0.03	0.04	0.07	0.03	0.08	0.07	0.04	0.09	-0.03	-0.08	-0.01	0.06	0.18**	
Infidelity	0.2***	0.03	-0.03	-0.07	-0.05	0.06	0.04	-0.02	-0.05	0.13*	0.08	0.06	0.09	0.08	0.09	-0.02	0.09	-0.01	0.25***	0.01

Note: Values represent Pearson correlation coefficients (r). For significance, <sup>†</sup> $p < 0.1$ ,  $*p < 0.05$ ,  $**p < 0.01$ ,  $***p < 0.001$ . Significant correlations are in bold.

### 2.4.3 Correlations table (fixations, subjective evaluations and violence)

```

dat_main_corr <- dat |>
  select(ID, Condition, Relationship,
         TFD, DFF, NF,
         Masculinity, Attractiveness,
         Partner_attractiveness:Partner_masculinity,
         ends_with("_safety"), Freq_robbery,
         starts_with("Freq_partner_")) |>
  group_by(ID, Condition, Relationship) |>
  summarise_all(mean)

dat_main_corr |>
  filter(Condition == "High") |>
  ungroup() |>
  select(TFD:Freq_partner_infidelity) |>
  rename_with(~str_replace_all(., "_", " ")) |>
  rename_with(~str_replace_all(., "Freq", "Frequency of")) |>
  rename_with(~str_replace_all(., "Frequency of partner", "Partner")) |>
  corr.stars() |>
  rownames_to_column(var = " ") |>
  dplyr::slice(-1) |>
  kable(digits = 2,
        booktabs = TRUE,
        align = c("l", rep("c", 20)),
        linesep = "",
        caption = "Correlations between XXXXXX",
        escape = FALSE) |>
  kable_styling(latex_options = c("HOLD_position"),
                font_size = 5) |>
  column_spec(1, width = "1.2cm") |>
  column_spec(2:21, width = "0.7cm") |>
  add_header_above(c(" ",
                     "Age" = 1,
                     "Health" = 1,
                     "Self-perceived conditions" = 7,
                     "Current/last partner\nperception" = 3,
                     "Perceived context\nviolence" = 6,
                     "Frequency of partner\nviolence" = 2),
                  bold = TRUE) |>
  footnote(general = paste0("Values represent Pearson correlation coefficients ($r$). ",
                             "For significance, $^{\dagger}p$ < 0.1, *$p$ < 0.05, ",
                             "**$p$ < 0.01, ***$p$ < 0.001. ",
                             "Significant correlations are in bold."),
          threeparttable = TRUE,
          footnote_as_chunk = TRUE,
          escape = FALSE) |>
  landscape()

```

Table S6. *Correlations between XXXXXX*

	Age	Health	Self-perceived conditions						Current/last partner perception				Perceived context violence		Frequency of partner violence		
	TFD	DFF	NF	Masculinity	Attractiveness	Partner attractiveness	Partner dominance	Partner masculinity	Perceived country safety	Perceived city safety	Perceived neighborhood safety	Perceived home safety	Perceived safety	Condition physical safety	Frequency of robbery	Partner physical violence	Partner sexual violence
DFF	-0.03																
NF	<b>0.82***</b>	-															
		<b>0.62***</b>															
Masculinity	<b>0.13*</b>	0.07	0.06														
Attractiveness	0.02	-	0.08	<b>0.49***</b>													
		<b>0.13*</b>															
Partner attractiveness	-0.04	0.05	-0.05	0.00	-0.01												
Partner dominance	-0.07	-0.03	-0.05	-0.04	-0.01	<b>0.63***</b>											
Partner masculinity	-0.07	0.08	-0.11 <sup>†</sup>	-0.01	-0.03	<b>0.75***</b>	<b>0.71***</b>										
Perceived country safety	-0.05	-0.05	-0.08	<b>0.14*</b>	0.05	-0.06	-0.03	-0.05									
Perceived city safety	-0.03	-0.08	-0.03	<b>0.12*</b>	0.00	-0.06	0.02	-0.02	<b>0.82***</b>								
Perceived neighborhood safety	-0.1 <sup>†</sup>	0.00	-0.1 <sup>†</sup>	<b>0.18**</b>	<b>0.24***</b>	0.01	0.00	0.05	<b>0.38***</b>	<b>0.34***</b>							
Perceived home safety	-0.09	0.08	-0.07	0.04	<b>0.12*</b>	-	-	-0.05	-	-	<b>0.34***</b>						
						<b>0.11*</b>	<b>0.12*</b>		<b>0.16**</b>	<b>0.21***</b>							
Perceived safety	-	-0.01	-	<b>0.18**</b>	<b>0.17**</b>	-0.09 <sup>†</sup>	-0.06	-0.03	<b>0.68***</b>	<b>0.63***</b>	<b>0.8***</b>	<b>0.51***</b>					
	<b>0.11*</b>		<b>0.11*</b>														
Condition physical safety	0.01	0.05	0.00	0.08	0.00	0.09 <sup>†</sup>	0.07	0.1 <sup>†</sup>	-0.03	-	0.02	-0.11 <sup>†</sup>	-0.09				
										<b>0.11*</b>							
Frequency of robbery	-0.01	0.08	-0.04	0.05	<b>0.13*</b>	-0.04	-0.08	-0.03	0.08	0.06	<b>0.18**</b>	<b>0.15**</b>	<b>0.19***</b>	-0.09			
Partner physical violence	0.09 <sup>†</sup>	-0.12 <sup>†</sup>	0.08	0.08	0.00	0.00	0.06	0.01	<b>0.13*</b>	<b>0.14**</b>	<b>0.17**</b>	0.08	<b>0.2***</b>	-0.02	-0.03		
Partner sexual violence	<b>0.12*</b>	-0.07	<b>0.15**</b>	-0.04	0.01	0.07	0.1 <sup>†</sup>	0.05	0.02	0.1 <sup>†</sup>	-0.01	-0.07	0.00	0.05	-0.02	0.09 <sup>†</sup>	
Partner infidelity	-0.02	0.07	-0.02	-0.05	0.04	0.08	0.06	0.08	<b>0.12*</b>	0.07	<b>0.18**</b>	0.02	<b>0.14**</b>	-0.01	0.01	<b>0.13*</b>	-0.03

Note: Values represent Pearson correlation coefficients (r). For significance, <sup>†</sup> $p < 0.1$ ,  $*p < 0.05$ ,  $**p < 0.01$ ,  $***p < 0.001$ . Significant correlations are in bold.



### 3 Session info (for reproducibility)

```
library(pander)
pander(sessionInfo(), locale = FALSE)
```

**R version 4.4.1 (2024-06-14)**

**Platform:** x86\_64-pc-linux-gnu

**attached base packages:** *stats4*, *stats*, *graphics*, *grDevices*, *utils*, *datasets*, *methods* and *base*

**other attached packages:** *pander*(v.0.6.5), *Hmisc*(v.5.1-3), *effectsize*(v.0.8.9), *bbmle*(v.1.0.25.1), *gtools*(v.3.9.5), *FactoMineR*(v.2.11), *factoextra*(v.1.0.7), *scales*(v.1.3.0), *GGally*(v.2.2.1), *performance*(v.0.12.2), *kableExtra*(v.1.4.0), *emmeans*(v.1.10.3), *lmerTest*(v.3.1-3), *lme4*(v.1.1-35.5), *Matrix*(v.1.7-0), *readxl*(v.1.4.3), *ggpubr*(v.0.6.0), *lubridate*(v.1.9.3), *forcats*(v.1.0.0), *stringr*(v.1.5.1), *dplyr*(v.1.1.4), *purrr*(v.1.0.2), *readr*(v.2.1.5), *tidyr*(v.1.3.1), *tibble*(v.3.2.1), *ggplot2*(v.3.5.1), *tidyverse*(v.2.0.0), *ggstats*(v.0.6.0), *MASS*(v.7.3-61), *car*(v.3.1-2), *carData*(v.3.0-5) and *knitr*(v.1.48)

**loaded via a namespace (and not attached):** *gridExtra*(v.2.3), *sandwich*(v.3.1-0), *rlang*(v.1.1.4), *magrittr*(v.2.0.3), *multcomp*(v.1.4-26), *compiler*(v.4.4.1), *systemfonts*(v.1.1.0), *vctr*(v.0.6.5), *crayon*(v.1.5.3), *pkgconfig*(v.2.0.3), *fastmap*(v.1.2.0), *backports*(v.1.5.0), *labeling*(v.0.4.3), *utf8*(v.1.2.4), *rmarkdown*(v.2.28), *tzdb*(v.0.4.0), *nloptr*(v.2.1.1), *xfun*(v.0.47), *flashClust*(v.1.01-2), *highr*(v.0.11), *broom*(v.1.0.6), *cluster*(v.2.1.6), *R6*(v.2.5.1), *stringi*(v.1.8.4), *RColorBrewer*(v.1.1-3), *rpart*(v.4.1.23), *boot*(v.1.3-30), *cellranger*(v.1.1.0), *numDeriv*(v.2016.8-1.1), *estimability*(v.1.5.1), *Rcpp*(v.1.0.13), *bookdown*(v.0.40), *zoo*(v.1.8-12), *base64enc*(v.0.1-3), *parameters*(v.0.22.0), *nnet*(v.7.3-19), *splines*(v.4.4.1), *timechange*(v.0.3.0), *tidyselect*(v.1.2.1), *rstudioapi*(v.0.16.0), *abind*(v.1.4-5), *yaml*(v.2.3.10), *codetools*(v.0.2-20), *lattice*(v.0.22-5), *plyr*(v.1.8.9), *bayestestR*(v.0.13.2), *withr*(v.3.0.1), *coda*(v.0.19-4.1), *evaluate*(v.0.24.0), *foreign*(v.0.8-86), *survival*(v.3.7-0), *xml2*(v.1.3.6), *pillar*(v.1.9.0), *checkmate*(v.2.3.2), *DT*(v.0.33), *insight*(v.0.20.2), *generics*(v.0.1.3), *hms*(v.1.1.3), *munsell*(v.0.5.1), *minqa*(v.1.2.7), *xtable*(v.1.8-4), *leaps*(v.3.2), *glue*(v.1.7.0), *scatterplot3d*(v.0.3-44), *tools*(v.4.4.1), *data.table*(v.1.15.4), *ggsignif*(v.0.6.4), *mvtnorm*(v.1.2-5), *cowplot*(v.1.1.3), *grid*(v.4.4.1), *datawizard*(v.0.12.2), *bdsmatrix*(v.1.3-7), *colorspace*(v.2.1-1), *nlme*(v.3.1-165), *htmlTable*(v.2.4.3), *Formula*(v.1.2-5), *cli*(v.3.6.3), *fansi*(v.1.0.6), *viridis-Lite*(v.0.4.2), *svglite*(v.2.1.3), *gtable*(v.0.3.5), *rstatix*(v.0.7.2), *digest*(v.0.6.37), *ggrepel*(v.0.9.5), *TH.data*(v.1.1-2), *farver*(v.2.1.2), *htmlwidgets*(v.1.6.4), *htmltools*(v.0.5.8.1), *lifecycle*(v.1.0.4) and *multcompView*(v.0.1-10)

### 4 Supplementary references

- Kassambara, A., & Mundt, F. (2020). *Factoextra: Extract and visualize the results of multivariate data analyses* [R package version 1.0.7]. <https://CRAN.R-project.org/package=factoextra>
- Kuznetsova, A., Brockhoff, P. B., & Christensen, R. H. B. (2017). lmerTest package: Tests in linear mixed effects models. *Journal of Statistical Software*, 82(13), 1–26. <https://doi.org/10.18637/jss.v082.i13>
- Lê, S., Josse, J., & Husson, F. (2008). FactoMineR: A package for multivariate analysis. *Journal of Statistical Software*, 25(1), 1–18. <https://doi.org/10.18637/jss.v025.i01>
- Lenth, R. V. (2024). *Emmeans: Estimated marginal means, aka least-squares means* [R package version 1.10.3]. <https://CRAN.R-project.org/package=emmeans>
- Lüdtke, D., Ben-Shachar, M. S., Patil, I., Waggoner, P., & Makowski, D. (2021). performance: An R package for assessment, comparison and testing of statistical models. *Journal of Open Source Software*, 6(60), 3139. <https://doi.org/10.21105/joss.03139>
- Wickham, H. (2016). *Ggplot2: Elegant graphics for data analysis*. Springer-Verlag New York. <https://ggplot2.tidyverse.org>
- Wickham, H., Averick, M., Bryan, J., Chang, W., McGowan, L. D., François, R., Grolemond, G., Hayes, A., Henry, L., Hester, J., Kuhn, M., Pedersen, T. L., Miller, E., Bache, S. M., Müller, K., Ooms, J., Robinson, D., Seidel, D. P., Spinu, V., ... Yutani, H. (2019). Welcome to the tidyverse. *Journal of Open Source Software*, 4(43), 1686. <https://doi.org/10.21105/joss.01686>
- Wickham, H., François, R., Henry, L., Müller, K., & Vaughan, D. (2023). *Dplyr: A grammar of data manipulation* [R package version 1.1.4]. <https://CRAN.R-project.org/package=dplyr>
- Wolen, A. R., Hartgerink, C. H., Hafen, R., Richards, B. G., Soderberg, C. K., & York, T. P. (2020). osfr: An R interface to the open science framework. *Journal of Open Source Software*, 5(46), 2071. <https://doi.org/10.21105/joss.02071>
- Xie, Y. (2014). Knitr: A comprehensive tool for reproducible research in R [ISBN 978-1466561595]. In V. Stodden, F. Leisch, & R. D. Peng (Eds.), *Implementing reproducible computational research*. Chapman and Hall/CRC. <https://doi.org/10.1201/9781315373461-1>
- Zhu, H. (2020). *Kableextra: Construct complex table with 'kable' and pipe syntax* [R package version 1.3.1]. <https://CRAN.R-project.org/package=kableExtra>