
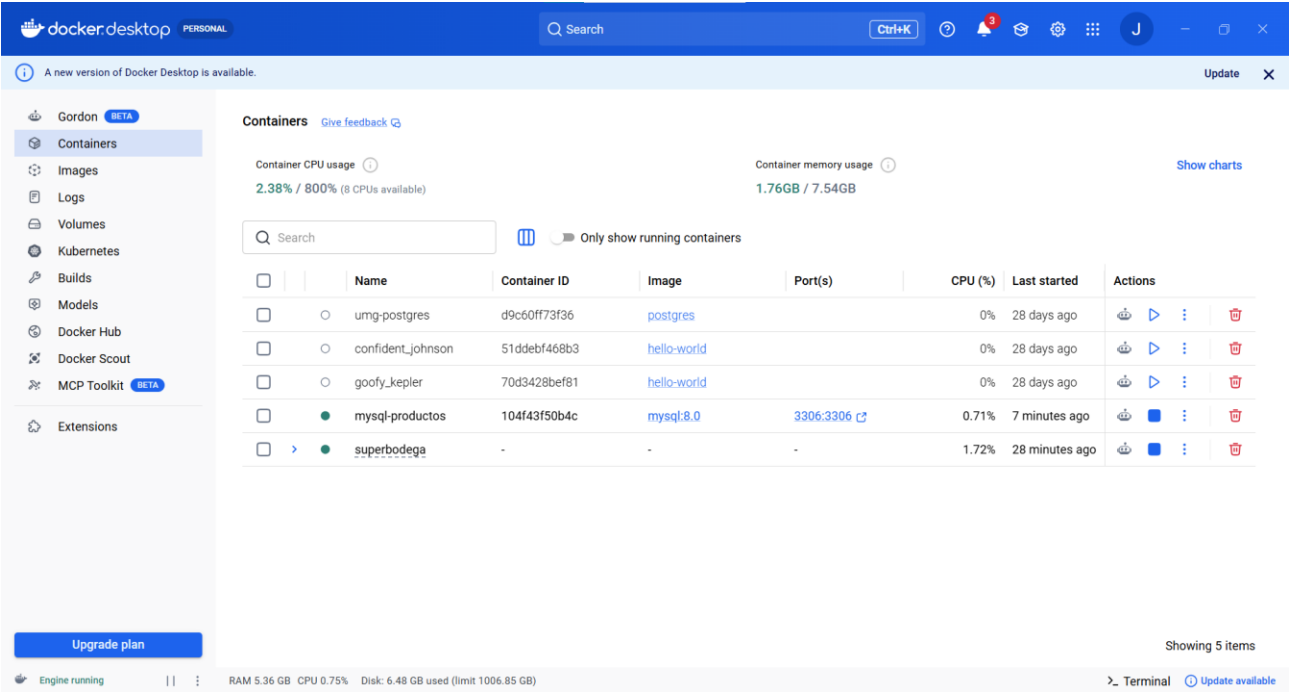


CAPTURAS

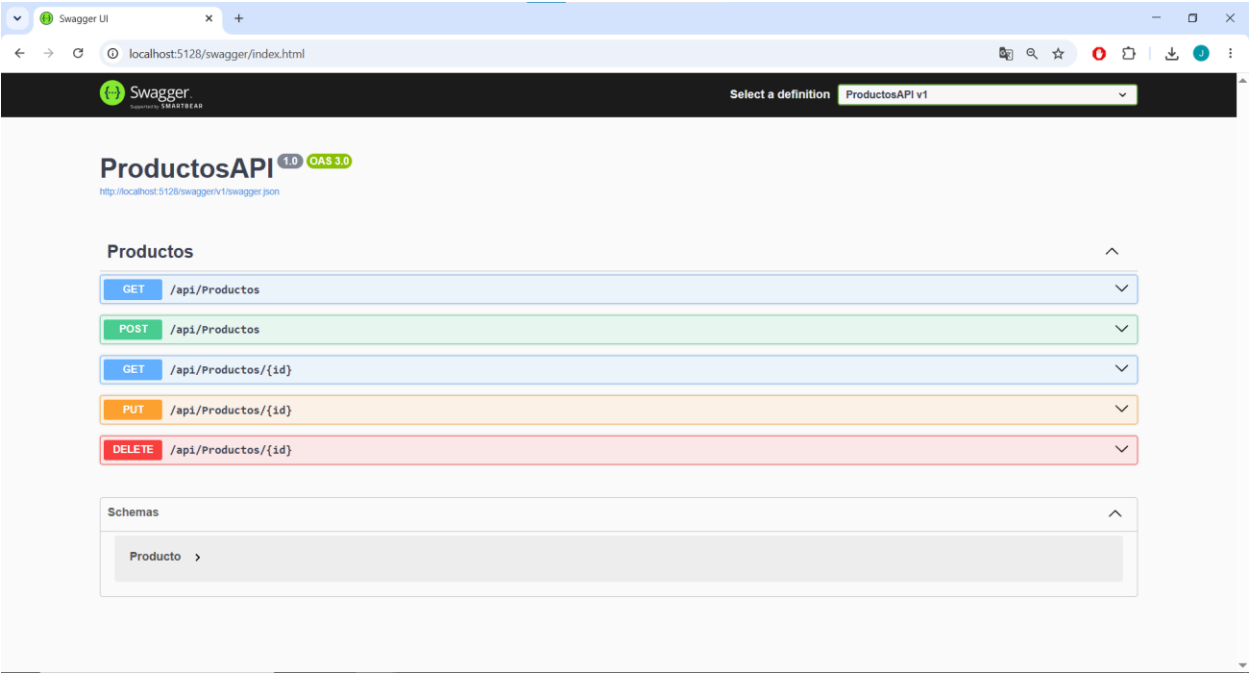

Post

Swagger UI interface showing a POST request to `localhost:5128/swagger/index.html`. The request URL is `http://localhost:5128/api/Productos`. The server response is a 201 status code with a JSON body:

```
{
  "id": 5,
  "nombre": "Queso",
  "precio": 25.5,
  "stock": 15
}
```

The response headers are:

```
content-type: application/json; charset=utf-8
date: Sat, 06 Jun 2020 17:46:21 GMT
location: http://localhost:5128/api/Productos/5
server: Kestrel
transfer-encoding: chunked
```

Below the response, there is a table of responses:

Code	Description	Links
200	OK	No links

The media type is set to `text/plain`. The example value for the response body is:

```
{
  "id": 0,
  "nombre": "string",
  "precio": 0,
  "stock": 0
}
```

Get

Swagger UI interface showing a GET request to `localhost:5128/swagger/index.html`. The request URL is `http://localhost:5128/api/Productos/5`. The server response is a 200 status code with a JSON body:

```
{
  "id": 5,
  "nombre": "Queso",
  "precio": 25.5,
  "stock": 15
}
```

The response headers are:

```
content-type: application/json; charset=utf-8
date: Sat, 06 Jun 2020 17:48:08 GMT
server: Kestrel
transfer-encoding: chunked
```

Below the response, there is a table of responses:

Code	Description	Links
200	OK	No links

The media type is set to `text/plain`. The example value for the response body is:

```
{
  "id": 0,
  "nombre": "string",
  "precio": 0,
  "stock": 0
}
```

Put

Swagger UI interface showing a PUT request to localhost:5128/swagger/index.html. The interface includes an 'Execute' button and a 'Clear' button. The 'Responses' section shows a 204 status code with headers: date: Sat, 06 Jun 2020 17:49:11 GMT, server: Kestrel.

```
curl -X PUT \
  http://localhost:5128/api/Productos/5 \
  -H 'accept: */*' \
  -H 'Content-Type: application/json' \
  -d '{
    "id": 5,
    "nombre": "Queso Actualizado",
    "precio": 30.00,
    "stock": 20
  }'
```

Request URL: http://localhost:5128/api/Productos/5

Server response

Code	Details
204	Response headers

204 Unsuccessful

Code	Description
200	OK

Links: No links

Swagger UI interface showing a PUT request to localhost:5128/swagger/index.html. The interface includes a 'Request URL' field and a 'Server response' section. The 'Responses' section shows a 200 status code with headers: content-type: application/json; charset=utf-8, date: Sat, 06 Jun 2020 17:50:07 GMT, server: Kestrel, transfer-encoding: chunked. The 'Response body' is displayed as a JSON array of product objects.

Request URL: http://localhost:5128/api/Productos

Server response

Code	Details
200	Response body

200

```
{
  "id": 2,
  "nombre": "Leche Actualizada",
  "precio": 10.5,
  "stock": 30
},
{
  "id": 3,
  "nombre": "Leche",
  "precio": 15.5,
  "stock": 20
},
{
  "id": 4,
  "nombre": "Leche",
  "precio": 15.5,
  "stock": 20
},
{
  "id": 5,
  "nombre": "Queso Actualizado",
  "precio": 30,
  "stock": 20
}
```

Response headers

Code	Description
200	OK

Links: No links

Media type: text/plain

Controls Accept header.

delete

Swagger UI interface showing a DELETE request to localhost:5128/swagger/index.html. The interface includes an 'Execute' button, a 'Clear' button, and a 'Responses' section. The 'Responses' section shows a 204 status code and a 'Server response' section with headers: date: Sat, 06 Jun 2020 17:58:47 GMT, server: Kestrel. The 'Schemas' section shows a 'Producto' schema.

Swagger UI interface showing a GET request to localhost:5128/swagger/index.html. The interface includes an 'Execute' button, a 'Clear' button, and a 'Responses' section. The 'Responses' section shows a 200 status code and a 'Response body' section with a JSON array of product objects. The 'Response headers' section shows: content-type: application/json; charset=utf-8, date: Sat, 06 Jun 2020 17:51:26 GMT, server: Kestrel, transfer-encoding: chunked.