


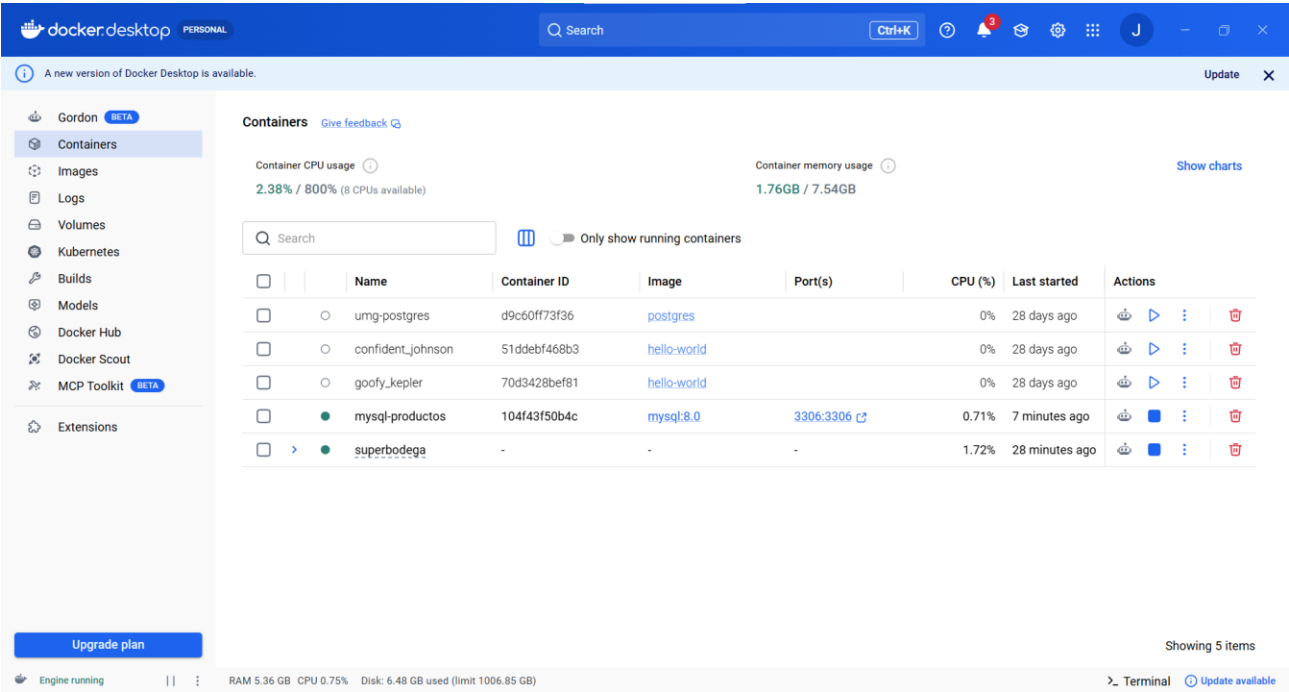
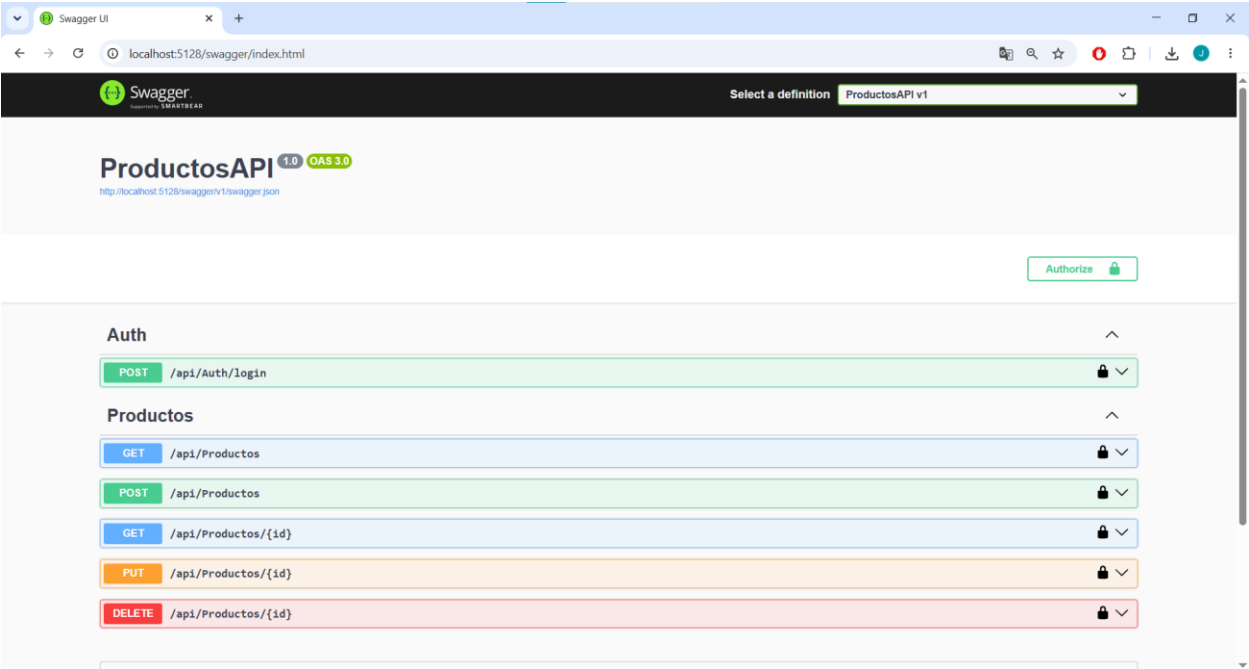


CAPTURAS

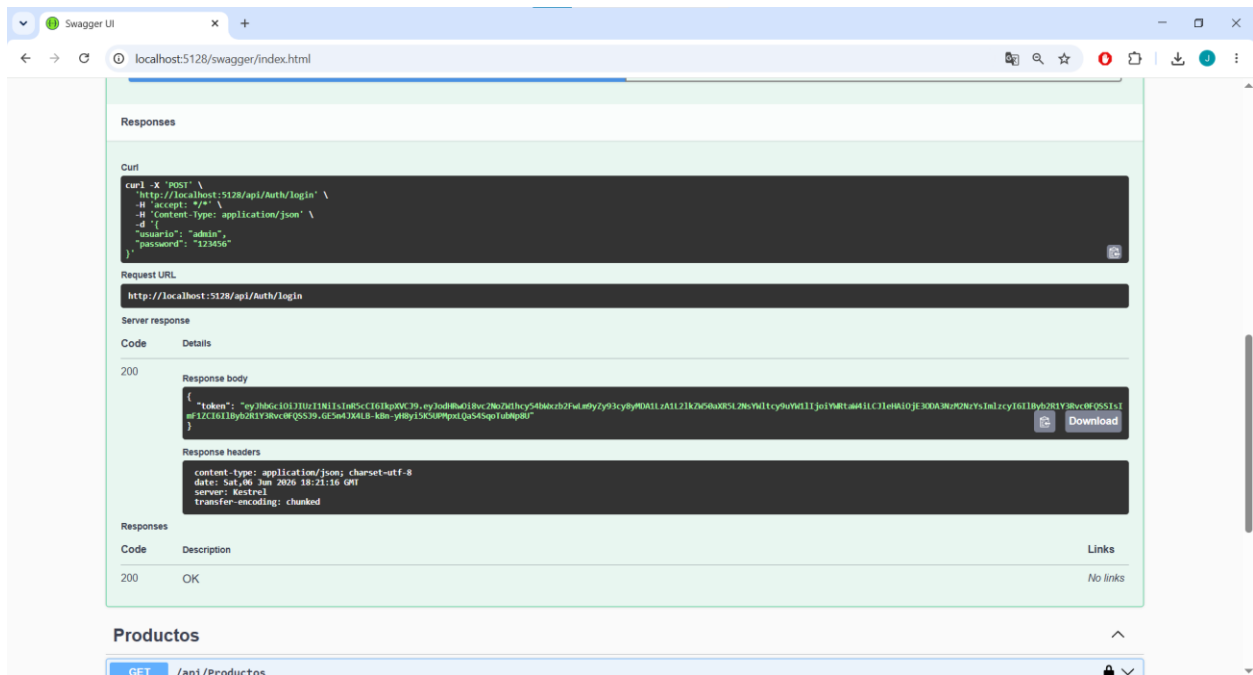



Auth

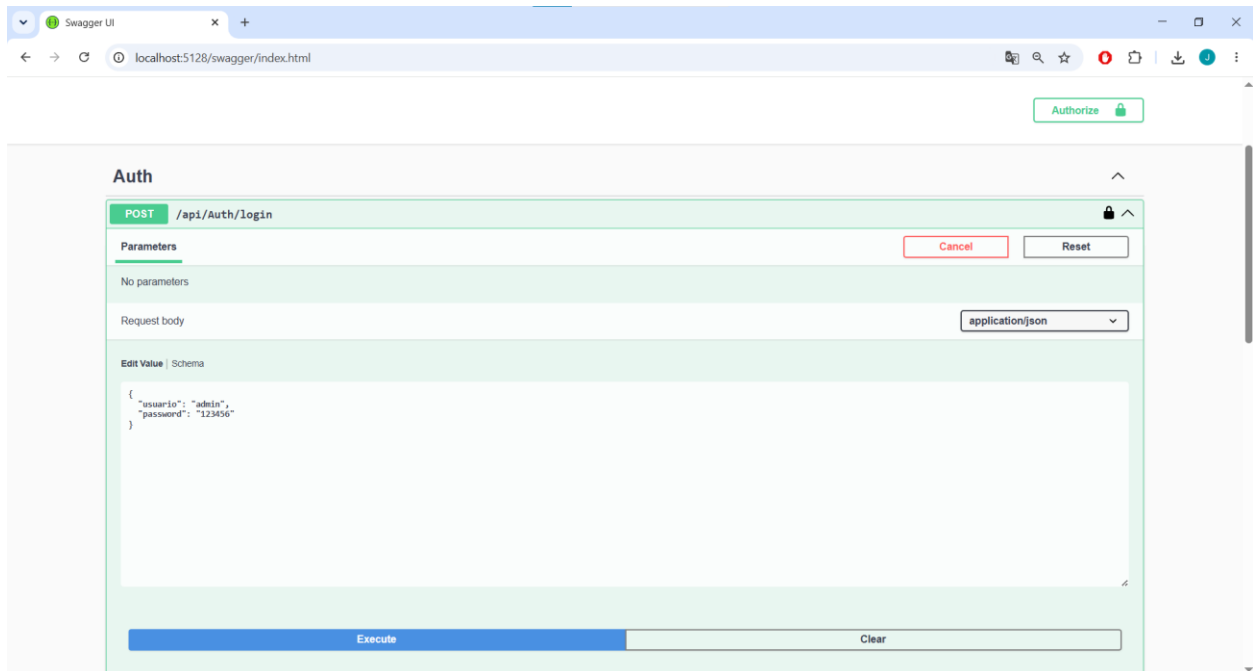


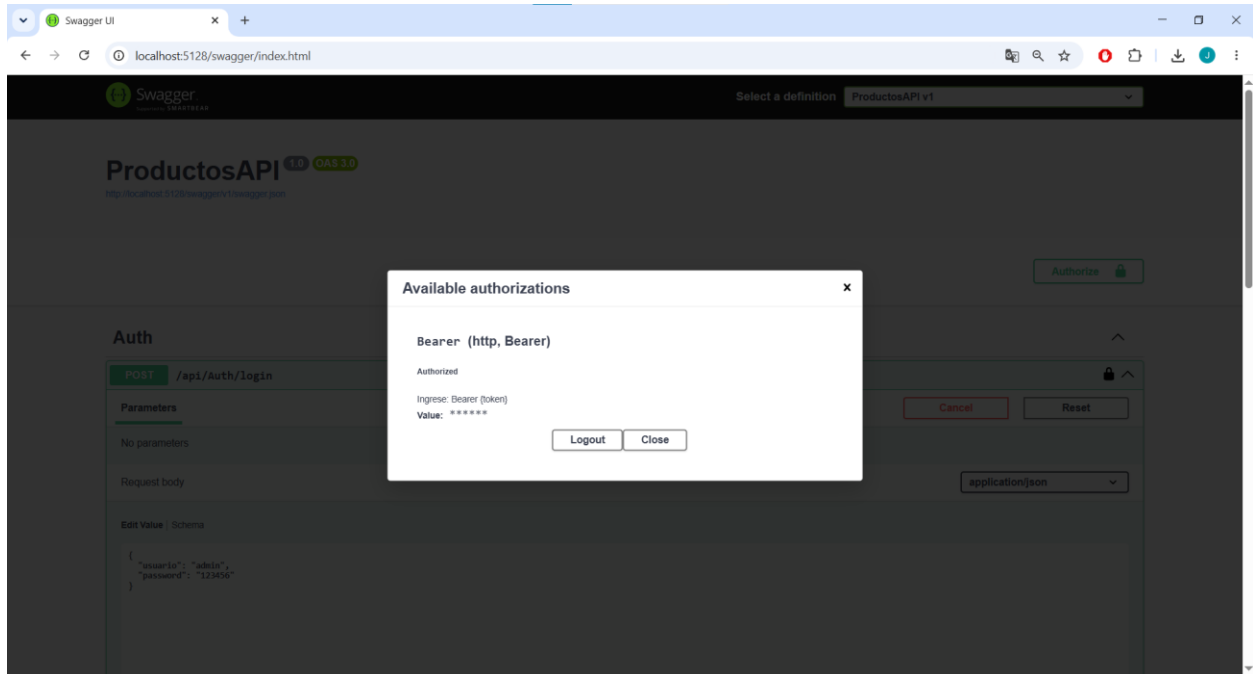


Post

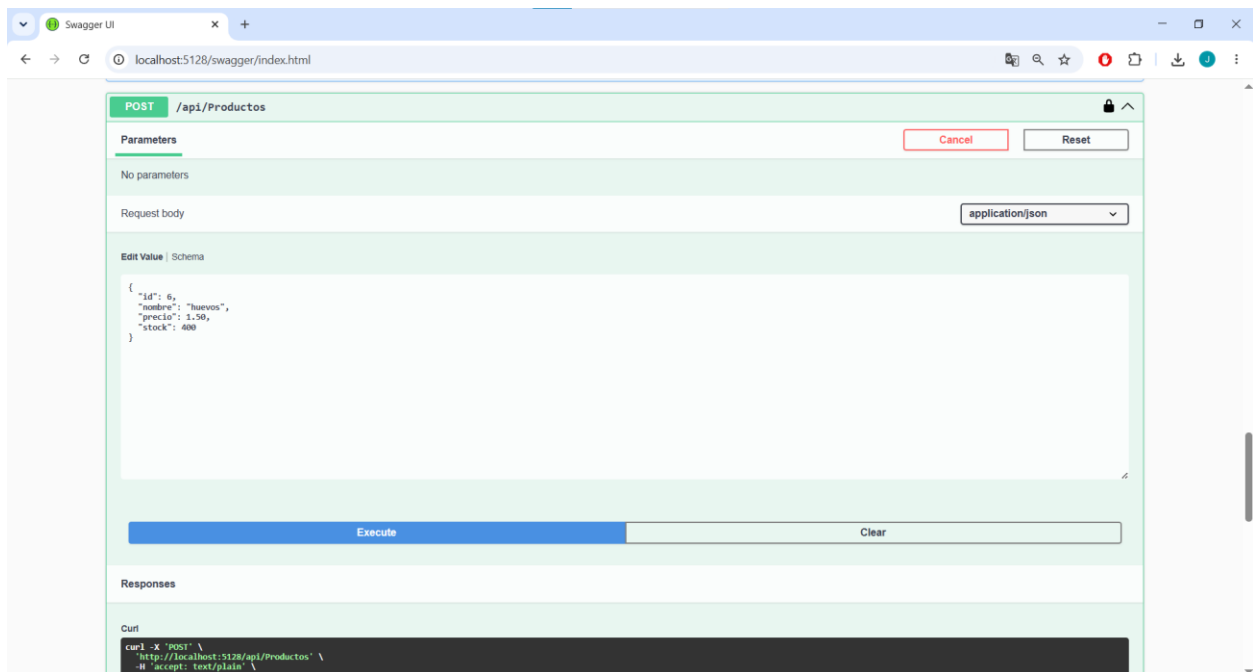

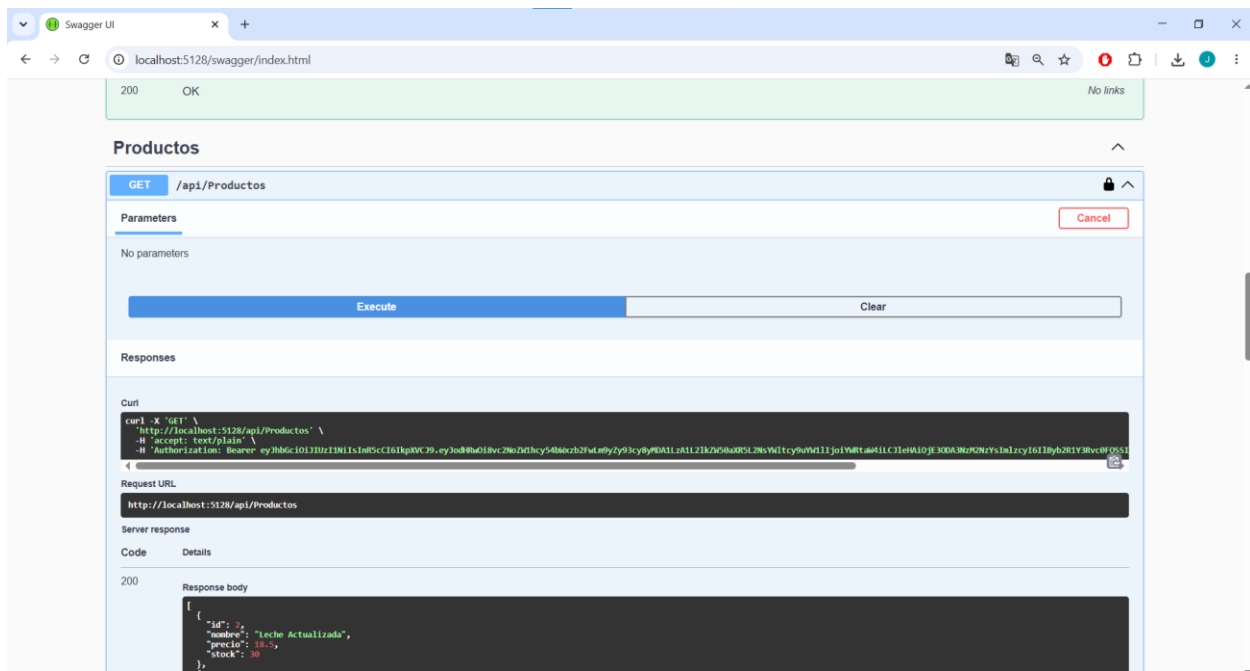

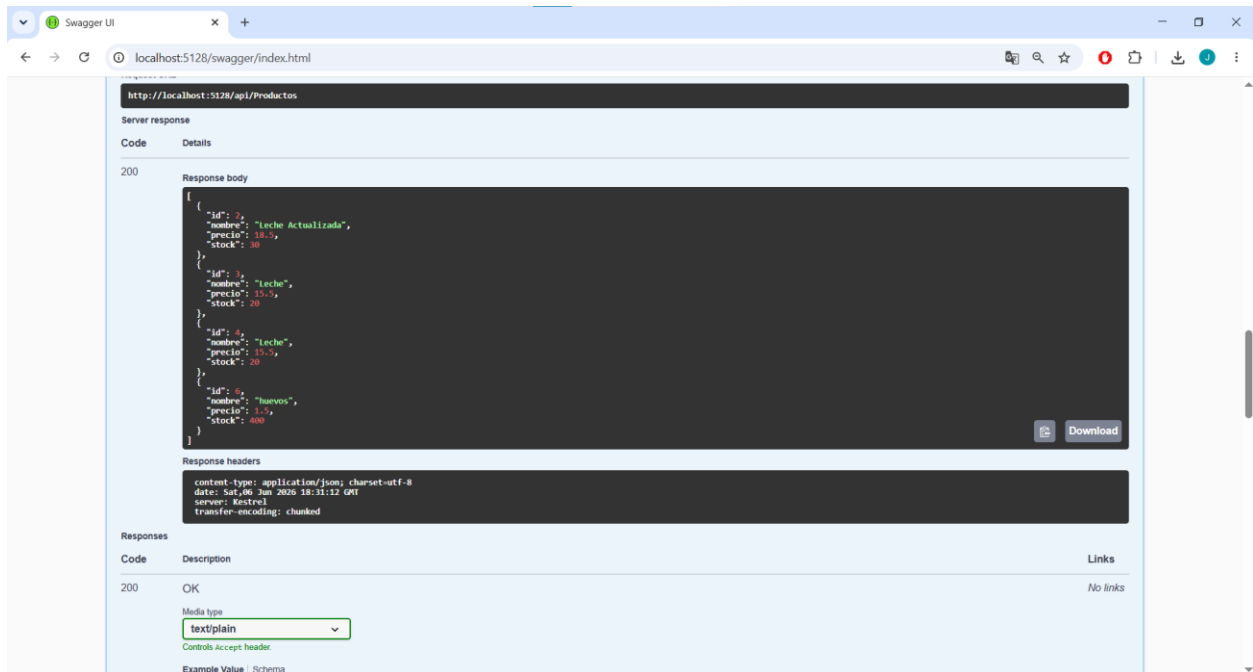

Get id

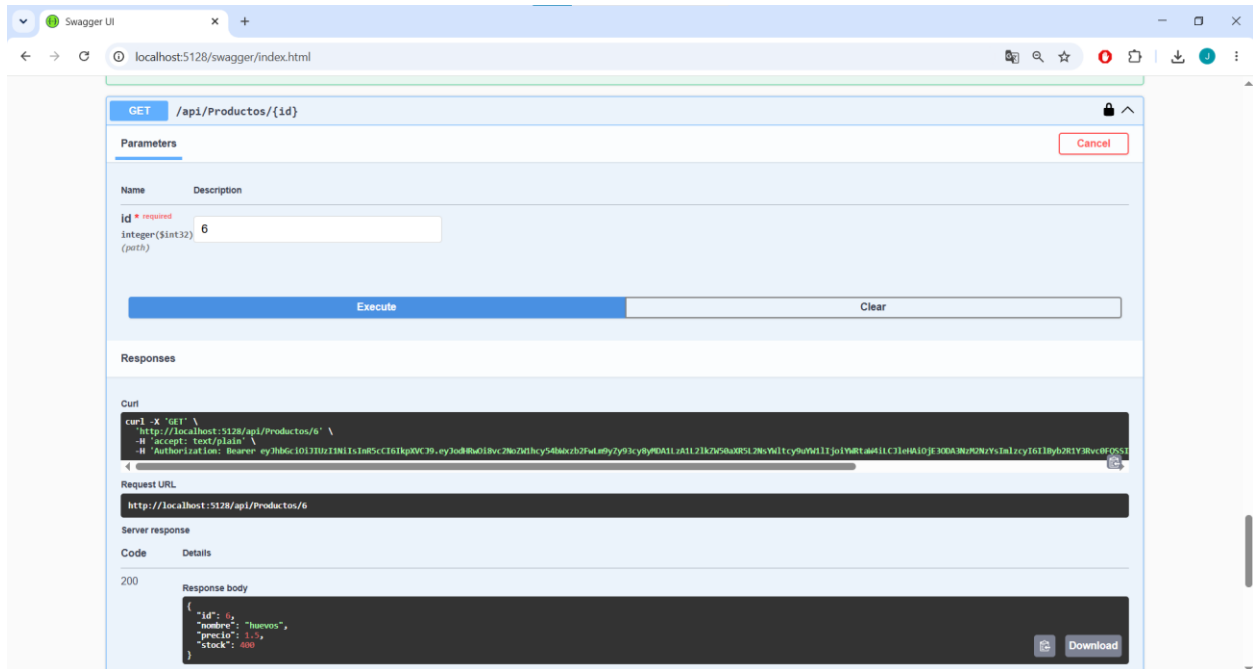

Put

Delete

The image displays two screenshots of the Swagger UI interface, showing a DELETE API endpoint being tested and executed.

Top Screenshot:

- The browser address bar shows `localhost:5128/swagger/index.html`.
- The **Responses** section shows a table with one entry:

Code	Description	Links
200	OK	No links
- The **DELETE /api/Productos/{id}** endpoint is selected.
- The **Parameters** section shows a required parameter `id` (Integer (\$int32) (path)) with a value of `6`.
- The **Execute** button is highlighted.
- The **Responses** section shows a table with one entry:

Code	Description	Links
204	No content	No links

Bottom Screenshot:

- The browser address bar shows `localhost:5128/swagger/index.html`.
- The **Parameters** section shows the same parameter `id` with a value of `6`.
- The **Execute** button is highlighted.
- The **Responses** section shows a table with one entry:

Code	Description	Links
200	OK	No links